



PROFESSIONAL AV SOLUTIONS  
2014 Catalog

# A MESSAGE FROM CHIEF

It's been an exciting year for Chief! Listening to our customers, following them on installs and tracking feedback through customer service has always been part of our mantra. But this year we took our conversations to a new level. As a company, we embraced the idea of 'Design Thinking.' Simply stated, it's a way to gather experiences from people like you, quickly develop rough prototypes and continually test and change those prototypes until we have a solid solution for your needs. We are using this mindset in everything we do. From developing products to improving our services to developing a brand new catalog! Within this completely redesigned catalog, we have taken your feedback to give you the best possible experience as you search for the product solutions you need. Here's how it all came to be:

The process began in April 2013, when we approached the people who most use the catalog (that's you) for feedback. We received lots of great ideas and we tested and revised them along the way. For example, you wanted clearer information about which accessories are compatible with various solutions – so we now group appropriate accessory options next to the mounts they serve. You wanted an easier way to find product categories, so we made sure to clearly tab them for you. There's lots more too. You'll have to open it up and see for yourself!

With every step in the process, user feedback helped make this catalog easier to navigate and find the product specifications you need.

But the catalog is just a start. This year also brought new products and services that we're really excited about! Our multi-display mounts have been a guiding force in Chief's Fusion® series – including the roll out of a variety of video wall and menu board solutions for ceiling, wall and floor mounts. Our Kontour™ series of monitor mounts also has expanded to include array configurations with features that provide precise screen placement adaptable to multiple users. Feedback was critical in developing these solutions.

Keep giving us feedback and insight, and we'll keep growing and improving our services. We've been working hard for 35 years to earn your ongoing loyalty. Thank you for your business, and we look forward to many more rewarding years ahead.



**Laurie Englert**  
Vice President of Marketing

*Laurie Englert*

## LEED *the* WAY

Chief's headquarters in Eden Prairie earned a Leadership in Energy and Environmental Design for Commercial Interiors (LEED-CI) Silver certification through the U.S. Green Building Council in 2012. This led to earning the 2013 Sustainable AV Award from InfoComm International® for implementing environmentally sustainable practices.

Beyond the facilities, Chief's environmental focus also affects our mount products. Many solutions qualify for LEED credits. For more, see the LEED Credit Information flyer at [chiefmfg.com/literature](http://chiefmfg.com/literature).

**Want more information on the recycled materials content of Chief products?** Email [LEED@milestone.com](mailto:LEED@milestone.com) for additional product support.





CERTIFIED  
PARTNER  
PROGRAM

# EARN *free* INDUSTRY CREDITS

with the Chief Certified Partner Program



Chief's Certified Partner Program continues to grow, and we couldn't be more pleased.



With more than 4,000 active users (over 2,000 Certified Partners), the Chief Certification Program is accredited for 12.5 CTS RUs from InfoComm, 8 CEDIA CEUs, 2 Digital Signage Experts Group credits and 1 American Institute of Architects learning unit. It's become a great way for our customers to differentiate themselves in the market.



There are 21 courses available through Chief's online program, which allows users to discover new ways to outfit complete rooms with different mount and rack solutions. From digital signage to corporations to schools, Chief offers installers and dealers fresh ways to bring AV solutions to life in buildings across the globe. Plus we've added a rewards program for our Certified Partners to pick out bonus gifts once they reach milestone point levels in their training. There are always new courses, tips and tricks, and great rewards, so the more you learn, the more you earn.



Visit [certification.chiefmfg.com](http://certification.chiefmfg.com) to sign up now.

## AWARDS



### **iPAD FLUSH MOUNT**

EXC!TE Award - 2012

### **FUSION LARGE FLAT PANEL CEILING MOUNT**

CE Pro BEST Award - 2012

### **FUSION CEILING MOUNTED VIDEO WALL SOLUTION**

InAVation Award - 2013

### **INTERACTIVE CEILING MOUNTED PROJECTOR SOLUTION**

InAVation Award - 2013

### **FUSION MANUAL HEIGHT ADJUSTABLE MOBILE CART**

Installation Product Award - 2013

### **FAVORITE MOUNT MANUFACTURER**

rAVe Reader's Choice Award - 2013

### **FUSION VIDEO WALL CEILING MOUNT & FUSION VIDEO WALL BOLT-DOWN MOUNT**

Innovation Award - Sound & Video Contractor - 2013

### **MILESTONE AV TECHNOLOGIES**

InfoComm Sustainable Technology Award - 2013



## INDUSTRY CERTIFICATIONS

Chief is an Emerald Level Certified Audio Visual Solutions Provider (CAVSP) and our staff has achieved a published level of certification to maintain a standard of excellence in the AV industry.

- **Installer's Forum** - Certified through CEDIA, NSCA and InfoComm
- **RPA Mini Installer's Forum** - Certified through CEDIA
- **Safeguarding Your AV Investment** - Certified through CEDIA
- **AVIU, Ensuring a Secure Installation** - Accredited by CEDIA
- **Online Learning, Building Innovative AV Ceiling Installations** - Accredited by NSCA
- **Mounting Solutions for Flat Screens and AV Equipment** - Accredited by AIA







# ONLINE TOOLS

In our continuing efforts to be the easiest manufacturing partner to work with, Chief has a host of online tools and resources to make your next project as easy as possible.

## **RACKBUILDER™**

RackBuilder is Chief's intuitive web application for visually configuring rack solutions with an extensive library of accessories and third party components. RackBuilder includes user-friendly capabilities such as the ability to save libraries of configurations and the ability to share current rack projects with others for feedback and changes. Select racks and regions can also take advantage of our RackBuilder Delivered® option. More on page 154.

[\*rackbuilder.chiefmfg.com\*](http://rackbuilder.chiefmfg.com)

## **CERTIFIED PARTNER PROGRAM**

Thousands of professionals have been using Chief's Certified Partner Program to differentiate their businesses and earn free industry credits in the process. We've implemented many upgrades to the program to make training with Chief even better. This year, we've introduced an improved login and registration process, the ability to instantly download your training transcripts and a streamlined rewards program with great incentives for training with us, among other updates.

[\*certification.chiefmfg.com\*](http://certification.chiefmfg.com)

## **MOUNTBUILDER™**

MountBuilder is the industry's first online product configurator for mounting solutions. This web-based application allows users to visually build custom configurations of Chief products and accessories directly from their browsers. In real-time you can walk through the steps of each module and build your own custom configurations, calculate weights and distances, assemble a parts list and more.

[\*mountbuilder.chiefmfg.com\*](http://mountbuilder.chiefmfg.com)

## **VIDEOS & ANIMATIONS**

Learn about our product features and how easy they are to install. View our videos or download them to look at later. They can also be embedded into your presentations or easily forwarded to colleagues.

[\*chiefmfg.com/Videos\*](http://chiefmfg.com/Videos)



### CHIEF IMAGE LIBRARY

Get all the product shots, application photos and videos you need for your website and marketing collateral on Chief's new Image Library. Register online to gain access!

[milestone.tandemvault.com](https://milestone.tandemvault.com)

### DESIGN CENTER

Chief's Design Center is our resource for Architects, Consultants and Designers. Chief also provides architects and designers with relevant downloadable documentation for many products – BIM objects, CAD drawings, tech drawings and manuals. The documents can be found on the downloads tab of all our product pages.

[chiefmfg.com/Design](https://chiefmfg.com/Design)

### REP MAP

Quickly find your local Chief representative by using Chief's online rep map.

[chiefmfg.com/RepMap](https://chiefmfg.com/RepMap)

### FAST-FLIP CATALOG

The Fast-Flip Catalog is the online version of the catalog, which has many of benefits — you can access it from anywhere, you can view specific products, and you can instantaneously get to the page you need with navigational links.

[chiefmfg.com/FastFlip](https://chiefmfg.com/FastFlip)

### LITERATURE DOWNLOADS

Find product lines, brochures, new product flyers, whitepapers and application-focused solutions on the Chief literature page, where you can download, print or request copies.

[chiefmfg.com/Literature](https://chiefmfg.com/Literature)

### VERTICAL MARKETS PAGES

See the application drop down menu on the Chief page for market specific information and solutions.

[www.chiefmfg.com](https://www.chiefmfg.com) (application drop-down)

### THROW DISTANCE CALCULATOR

Choose from an extensive list of projectors and adjust room lighting, screen gain, application and diagonal to find the optimum distance for top performance.

[chiefmfg.com/ProjectorCalculator](https://chiefmfg.com/ProjectorCalculator)

### MULTI-MONITOR CALCULATOR

Enter in the number of screens, their size and mounting patterns, and the multi-monitor calculator will help you determine which mount will best serve your needs.

[chiefmfg.com/MonitorCalculator](https://chiefmfg.com/MonitorCalculator)

### VIDEO CONFERENCING ACCESSORY FINDER

Quickly determine the range of Chief accessories that help customize common video conferencing products.

[chiefmfg.com/VideoConferenceCalculator](https://chiefmfg.com/VideoConferenceCalculator)

### AUTOMATED PRODUCT SERIAL COMMAND CALCULATOR

Find serial commands for Chief's automated solutions by selecting a product and address.

[chiefmfg.com/AutomatedRemoteCodes](https://chiefmfg.com/AutomatedRemoteCodes)

# TABLE OF CONTENTS

## QUICK REFERENCE CHARTS

- |                                  |                                       |
|----------------------------------|---------------------------------------|
| <b>6 - 7</b> Projector Mounts    | <b>13 - 15</b> Freestanding TV Mounts |
| <b>8 - 11</b> Wall TV Mounts     | <b>15 - 18</b> Monitor Mounts         |
| <b>11 - 13</b> Ceiling TV Mounts | <b>19 - 20</b> Rack Systems           |

## PROJECTOR MOUNTS

- |   |   |
|---|---|
| <b>21 - 23</b> RPA Elite® Ceiling Projector Mounts      | <b>35 - 38</b> WM Series Short Throw Projector Mounts & Accessories   |
| <b>24 - 25</b> RPA® Series Ceiling Projector Mounts     | <b>39 - 40</b> WP2 Series Short Throw Projector Mounts & Accessories  |
| <b>26</b> Other Ceiling Projector Mounts                | <b>41 - 43</b> Interactive Short Throw Projector Mounts & Accessories |
| <b>27 - 31</b> Ceiling Projector Mount Accessories      | <b>44</b> Whiteboard Mount for Interactive Boards                     |
| <b>32 - 34</b> Automated Projector Mounts & Accessories | <b>45 - 46</b> Integrated Interactive System & Accessories            |

## WALL TV MOUNTS

- |  |   |
|--|---|
| <b>47 - 51</b> Fusion® Fixed TV Wall Mounts & Accessories    | <b>65 - 67</b> Other Tilt TV Wall Mounts & Accessories          |
| <b>52 - 53</b> Thinstall™ Fixed TV Wall Mounts & Accessories | <b>68 - 69</b> ConnexSys™ Video Wall TV System                  |
| <b>54 - 56</b> Other Fixed TV Wall Mounts & Accessories      | <b>70 - 72</b> Fusion Video Wall TV Mounts & Accessories        |
| <b>57</b> Other Fixed CPU Mounts                             | <b>73 - 76</b> Thinstall Swing Arm TV Wall Mounts & Accessories |
| <b>58 - 62</b> Fusion Tilt TV Wall Mounts & Accessories      | <b>77</b> Automated Swing Arm TV Wall Mount                     |
| <b>63 - 64</b> Thinstall Tilt TV Wall Mounts & Accessories   | <b>78 - 79</b> Other Swing Arm TV Wall Mounts & Accessories     |

# TABLE OF CONTENTS

## CEILING TV MOUNTS

- |   |   |
|---|---|
| <b>80 - 82</b> Fusion® Video Wall TV Ceiling Mounts & Accessories | <b>96</b> Automated Ceiling Lift                                |
| <b>83 - 85</b> Fusion Menu Board TV Ceiling Mounts & Accessories  | <b>97 - 103</b> Other Ceiling Truss & Pole Mounts & Accessories |
| <b>86 - 95</b> Fusion Standard TV Ceiling Mounts & Accessories    |   |

## FREESTANDING TV MOUNTS

- |   |  |
|---|--|
| <b>104 - 108</b> Fusion Video Wall Freestanding TV Mounts & Accessories | <b>113 - 117</b> Other Cart & Stand TV Mount & Accessories |
| <b>109 - 111</b> Fusion Standard Freestanding TV Mounts & Accessories   | <b>118 - 120</b> Table Stand TV Mounts & Accessories       |
| <b>112</b> Automated Pop-Up Lift  |  |

## MONITOR MOUNTS

- |  |  |
|--|--|
| <b>121 - 128</b> Kontour™ Desk Monitor Mounts & Accessories      | <b>143 - 144</b> Kontour Wall Array Monitor Mounts         |
| <b>129 - 135</b> Kontour Desk Array Monitor Mounts & Accessories | <b>145 - 150</b> Kontour Pole Monitor Mounts & Accessories |
| <b>136 - 142</b> Kontour Wall Monitor Mounts & Accessories       | <b>151 - 153</b> Tablet Mounts                             |

## RACK SYSTEMS

- |   |   |
|---|---|
| <b>154</b> RackBuilder™ Online Tools                            | <b>162 - 164</b> Raxxess Rotating & Pull-Out Rack Systems & Accessories |
| <b>155 - 156</b> Raxxess™ Knock Down Rack Systems & Accessories | <b>165 - 167</b> Raxxess On-Wall Rack Systems & Accessories             |
| <b>157 - 158</b> Raxxess Gangable Rack Systems & Accessories    | <b>168 - 172</b> Raxxess Freestanding Rack Systems & Accessories        |
| <b>159 - 160</b> Raxxess Enclosed Rack Systems & Accessories    | <b>173</b> Raxxess Elite Roll Top Desks                                 |
| <b>161</b> Raxxess Furniture Rack Systems                       | <b>174 - 182</b> Other Raxxess Rack Accessories                         |



# QUICK REFERENCE CHART



= POPULAR PRODUCT



= QUALIFIES FOR LEED CREDIT

## CEILING PROJECTOR MOUNTS

Model	Product	Weight Capacity	Roll, Pitch, and Yaw	Dimensions (HxWxD)	Color	Page
<b>RPMA</b> RPA ELITE SERIES		50 lbs (22.7 kg)	3°, 20°, 360°	2.7 x 6.5 x 5.5" (69 x 165 x 140 mm)		22
<b>RPMA1</b> RPA ELITE SERIES		50 lbs (22.7 kg)	3°, 20°, 360°	3.9 x 14.7 x 12.2" (99 x 374 x 310 mm)		22
<b>RSMA</b> RPA ELITE SERIES		25 lbs (11.3 kg)	3°, 15°, 360°	1.8 x 4.4 x 5.1" (46 x 111 x 129 mm)		23
<b>RPA</b> RPA SERIES		50 lbs (22.7 kg)	4°, 25°, 360°	1.8 x 6.5 x 5.5" (44 x 165 x 140 mm)		24
<b>RPAA1</b> RPA SERIES		50 lbs (22.7 kg)	4°, 25°, 360°	3.4 x 16.2 x 12.1" (86 x 411 x 307 mm)		24
<b>RSA</b> RPA SERIES		25 lbs (11.3 kg)	3°, 20°, 360°	1.4 x 4.4 x 4.4" (37 x 111 x 112 mm)		25
<b>LCDA</b>		50 lbs (22.7 kg)	5°, 90°, 360°	10.8 - 16" (274-406 mm) x 14.13 - 19.6" (359-498 mm) x 22.25" (565 mm)		26
<b>VCM</b>		250 lbs (113.4 kg)	5°, 20°, 360°	3.8 x 17 x 9.3" (97 x 432 x 235 mm)		26

## AUTOMATED PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)	Page
<b>SL220</b> SMART-LIFT		8.5" (216 mm)	30 lbs (13.6 kg)	9.5 x 16.5 x 18.5" (241 x 419 x 470 mm)	11.2 x 23.5 x 23.5" (284 x 597 x 597 mm)	19.3 x 20.7" (489 x 526 mm)	33
<b>SL236</b> SMART-LIFT		36" (914 mm)	35 lbs (15.9 kg)	9.3 x 20.5 x 22.8" (235 x 521 x 578 mm)	11.1 x 25.5 x 28.5" (282 x 648 x 724 mm)	23.9 x 23.9" (607 x 607 mm)	33
<b>SL151</b> SMART-LIFT		8.3" (211 mm)	35 lbs (15.9 kg)	8.4 x 18.3 x 18.3" (213 x 464 x 464 mm)	11.2 x 23.5 x 23.5" (284 x 597 x 597 mm)	20.2 x 20.3" (514 x 515 mm)	33

## WALL PROJECTOR MOUNTS



















Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
<b>WM210AUS</b> WM SERIES		<b>EXTENDS UP TO 20" (508 mm)</b>	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 23.1" (293 x 499 x 586 mm)	36
<b>WM220AUS</b> WM SERIES		<b>EXTENDS UP TO 30" (762 mm)</b>	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 35.6" (293 x 499 x 904 mm)	36
<b>WM230AUS</b> WM SERIES		<b>EXTENDS UP TO 55" (140 cm)</b>	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 59.6" (29 x 50 x 151 cm)	36

# QUICK REFERENCE CHART

 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT

## WALL PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
<b>WM240AUS</b> WM SERIES		<b>XL</b> EXTENDS UP TO 66" (168 cm)	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 70.4" (29 x 50 x 179 cm)	36
<b>WM110AUS</b>  WM SERIES		<b>S</b> EXTENDS UP TO 18" (457 mm)	25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 21.7" (360 x 185 x 551 mm)	37
<b>WM120AUS</b>  WM SERIES		<b>M</b> EXTENDS UP TO 29" (737 mm)	25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 34.2" (360 x 185 x 869 mm)	37
<b>WM130AUS</b> WM SERIES		<b>L</b> EXTENDS UP TO 53" (135 cm)	25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 58.2" (360 x 185 x 1479 mm)	37
<b>WP21US</b> WP SERIES		<b>S</b> EXTENDS UP TO 22" (559 mm)	25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 24.4" (22 x 48 x 62 cm)	39
<b>WP22US</b> WP SERIES		<b>M</b> EXTENDS UP TO 38" (965 mm)	25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 40.4" (22 x 48 x 103 cm)	39
<b>WP23US</b> WP SERIES		<b>L</b> EXTENDS UP TO 54" (137 cm)	25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 56.4" (22 x 48 x 143 cm)	39
<b>WM210AUSI</b> SHORT THROW INTERACTIVE		<b>S</b> EXTENDS 12.8 - 20" (325 - 508 mm)	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 23.1" (293 x 499 x 586 mm)	42
<b>WM220AUSI</b>  SHORT THROW INTERACTIVE		<b>M</b> EXTENDS 18 - 30" (457 - 762 mm)	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 35.6" (293 x 499 x 904 mm)	42
<b>WM230AUSI</b> SHORT THROW INTERACTIVE		<b>L</b> EXTENDS 30 - 55" (76 - 140 cm)	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 59.6" (29 x 50 x 151 cm)	42
<b>WM240AUSI</b> SHORT THROW INTERACTIVE		<b>XL</b> EXTENDS 37 - 66" (94 - 168 cm)	25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 70.4" (29 x 50 x 179 cm)	42
<b>WBM2</b> WHITEBOARD MOUNT		N/A	125 lbs (56.7 kg)	N/A	N/A	48.8 x 46.9 x 4.9" (124 x 119 x 13 cm)	44
<b>WBM2E</b> WHITEBOARD MOUNT		N/A	125 lbs (56.7 kg)	N/A	N/A	64.8 x 46.9 x 4.9" (164 x 119 x 13 cm)	44
<b>WBM3E</b> WHITEBOARD MOUNT		5 - 7' (152 - 213 cm)	125 lbs (56.7 kg)	N/A	N/A	82.8 x 46.9 x 4.9" (210 x 119 x 13 cm)	44
<b>AN1</b> INTERACTIVE SYSTEM		N/A	25 lbs (11.3 kg)	N/A	N/A	63 x 82.9 x 25.6" (160 x 210 x 65 cm)	45

# QUICK REFERENCE CHART






























= POPULAR PRODUCT








= QUALIFIES FOR LEED CREDIT

## FIXED TV WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max Lateral Shift	Height Adjust	Page
<b>XSMU</b> FUSION™ SERIES	 	 <b>XL</b> 55 - 82"	250 lbs (113.4 kg)	16.5 x 48.4 x 2.3" (419 x 1230 x 57 mm)	200 x 200 mm - 1230 x 660 mm	23.5" (597 mm)	1" (25 mm)	48
<b>LSMU</b> FUSION SERIES	 	 <b>L</b> 37 - 63"	200 lbs (90.7 kg)	16.5 x 34.4 x 2.0" (419 x 875 x 50 mm)	100 x 100 mm - 879 x 505 mm	17.5" (445 mm)	1" (25 mm)	48
<b>LSAU</b> FUSION SERIES		 <b>L</b> 37 - 63"	200 lbs (90.7 kg)	13.2 x 34.4 x 2.0" (335 x 875 x 50 mm)	100 x 100 mm - 879 x 505 mm	17.5" (445 mm)	N/A	48
<b>MSMU</b> FUSION SERIES	 	 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	16.5 x 25.4 x 2.0" (420 x 646 x 50 mm)	100 x 100 mm - 650 x 400 mm	14.5" (368 mm)	1" (25 mm)	49
<b>MSAU</b> FUSION SERIES		 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	13.5 x 25.4 x 2.0" (343 x 646 x 50 mm)	100 x 100 mm - 650 x 400 mm	14.5" (368 mm)	N/A	49
<b>LSTU</b> THINSTALL™ SERIES		 <b>L</b> 37 - 63"	125 lbs (56.7 kg)	24.7 x 35.7 x 0.4" (628 x 907 x 10 mm)	200 x 200 mm - 800 x 500 mm	N/A	N/A	52
<b>MSTU</b> THINSTALL SERIES		 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	20.9 x 27.8 x 0.4" (530 x 706 x 10 mm)	100 x 100 mm - 600 x 400 mm	N/A	N/A	52
<b>PSMH</b>		 <b>XL</b> OVER 60"	300 lbs (136 kg)	25 x 36.4 x 2.9" (635 x 924 x 74 mm)	400 x 400 mm - 800 x 400 mm	N/A	N/A	54
<b>RXF2</b>		 <b>XL</b> 40 - 63"	175 lbs (79.4 kg)	20.5 x 38.0 x 0.8" (521 x 965 x 20 mm)	200 x 100 mm - 855 x 500 mm	N/A	N/A	54
<b>RLF2</b>		 <b>L</b> 32 - 52"	125 lbs (56.7 kg)	16.5 x 30.8 x 0.8" (419 x 781 x 20 mm)	100 x 100 mm - 670 x 400 mm	N/A	N/A	54
<b>RMF2</b>		 <b>M</b> 26 - 42"	125 lbs (56.7 kg)	16.5 x 22.0 x 0.8" (419 x 559 x 20 mm)	100 x 100 mm - 445 x 400 mm	N/A	N/A	55
<b>FSR</b>		 <b>S</b> 10 - 32"	45 lbs (20.4 kg)	7.0 x 6.0 x 0.8" (178 x 152 x 19 mm)	75 x 75 mm - 200 x 100 mm	N/A	N/A	55

## FIXED CPU MOUNTS

Model	Product	Mounting Option	Weight Capacity	Dimensions (HxWxD)	Maximum Equipment Size	Pole Diameter Range	Page
<b>PAC260W</b>		Wall	30 lbs (13.6 kg)	8.96 x 7 x 2.58" (228 x 178 x 66 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A	57
<b>PAC260P</b>		Pole	30 lbs (13.6 kg)	8.96 x 7 x 4.16" (228 x 178 x 106 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	1.5 - 1.95" (38 - 49 mm)	57
<b>PAC260D</b>		Direct-to-Display (100 x 100 mm)	30 lbs (13.6 kg)	8.96 x 7 x 1.76" (228 x 178 x 45 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A	57
<b>PAC261W</b>		Wall	30 lbs (13.6 kg)	12.07 x 7 x 2.58" (307 x 178 x 66 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A	57
<b>PAC261P</b>		Pole	30 lbs (13.6 kg)	12.07 x 7 x 4.16" (307 x 178 x 106 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	1.5 - 1.95" (38 - 49 mm)	57



# QUICK REFERENCE CHART

































 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT

## FIXED CPU MOUNTS

Model	Product	Mounting Option	Weight Capacity	Dimensions (HxWxD)	Maximum Equipment Size	Pole Diameter Range	Page
<b>PAC261D</b>		Direct-to-Display (100 x 100 mm)	30 lbs (13.6 kg)	12.07 x 7 x 1.76" (307 x 178 x 45 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A	57

## TILT TV WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max Lateral Shift	Tilt	Page
<b>XTMU</b> FUSION™ SERIES		 <b>XL</b> 55 - 82"	250 lbs (113.4 kg)	27 x 48.6 x 2" (68.6 x 123.4 x 5.1 cm)	200 x 200 - 1250 x 660 mm	23.5" (597 mm)	-12°	59
<b>LTMU</b> FUSION SERIES	 	 <b>L</b> 37 - 63"	200 lbs (90.7 kg)	21 x 34.6 x 2" (533 x 879 x 51 mm)	100 x 100 mm - 895 x 505 mm	17.5" (445 mm)	-12°	59
<b>LTMPU</b> FUSION SERIES		 <b>L</b> 37 - 63"	200 lbs (90.7 kg)	34.4 x 22.6 x 2" (874 x 574 x 51 mm)	200 x 200 mm - 800 x 525 mm	11.5" (292 mm)	-11°	59
<b>LTAU</b> FUSION SERIES		 <b>L</b> 37 - 63"	200 lbs (90.7 kg)	21 x 34.6 x 2" (533 x 879 x 51 mm)	100 x 100 mm - 895 x 505 mm	17.5" (445 mm)	-12°	59
<b>MTMU</b> FUSION SERIES	 	 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	16.5 x 25.6 x 2" (419 x 650 x 51 mm)	100 x 100 mm - 667 x 400 mm	14.5" (368 mm)	-12°	60
<b>MTMPU</b> FUSION SERIES		 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	24.5 x 18.6 x 2" (622 x 472 x 51 mm)	100 x 100 mm - 600 x 460 mm	8.5" (216 mm)	+3°, -10°	60
<b>MTAU</b> FUSION SERIES		 <b>M</b> 26 - 47"	125 lbs (56.7 kg)	16.5 x 25.6 x 2" (419 x 650 x 51 mm)	100 x 100 mm - 673 x 400 mm	14.5" (368 mm)	-12°	60
<b>LTTU</b> THINSTALL™ SERIES		 <b>L</b> 37 - 63"	100 lbs (45.4 kg)	21.6 x 35.7 x 0.8" (548 x 907 x 19 mm)	200 x 200 mm - 800 x 500 mm	N/A	-12°	63
<b>MTTU</b> THINSTALL SERIES		 <b>M</b> 26 - 47"	100 lbs (45.4 kg)	17.6 x 27.8 x 0.8" (448 x 706 x 19 mm)	100 x 100 mm - 600 x 400 mm	N/A	-12°	63
<b>RXT2</b>		 <b>XL</b> 40 - 63"	175 lbs (79.4 kg)	20.5 x 38.0 x 2.0" (521 x 965 x 50 mm)	200 x 200 mm - 910 x 500 mm	N/A	-12°	65
<b>RLT2</b>		 <b>L</b> 32 - 52"	125 lbs (56.7 kg)	16.5 x 30.8 x 2.0" (419 x 781 x 50 mm)	100 x 100 mm - 723 x 400 mm	N/A	-12°	65
<b>PWC</b>		 <b>L</b> 42 - 71"	125 lbs (56.7 kg)	17.3 x 19.2 x 4.5" (439 x 488 x 114 mm)	200 x 200 mm - 862 x 517 mm	N/A	-15°	65
<b>RMT2</b>		 <b>M</b> 26 - 42"	125 lbs (56.7 kg)	16.5 x 22.0 x 2.0" (419 x 559 x 50 mm)	100 x 100 mm - 506 x 400 mm	N/A	-12°	66
<b>MWC</b>		 <b>M</b> 26 - 55"	100 lbs (45.4 kg)	11.9 x 19.2 x 4.5" (303 x 487 x 114 mm)	100 x 100 mm - 709 x 431 mm	N/A	-15°	66
<b>FTR</b>		 <b>S</b> 10 - 32"	45 lbs (20.4 kg)	5.6 x 5.6 x 2" (142 x 142 x 51 mm)	75 x 75 mm - 200 x 100 mm	N/A	+5°, -15°	66

# QUICK REFERENCE CHART

= POPULAR PRODUCT    = QUALIFIES FOR LEED CREDIT

## MULTI-DISPLAY TV WALL MOUNTS

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust	Page
<b>LVS1</b> CONNEXSYS™ SERIES		<b>42 - 80"</b>	150 lbs (68 kg)	19.1 x 35.5 x 4" (485 x 903 x 102 mm)	200 x 200 - 700 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)	69
<b>LVS1UP</b> CONNEXSYS SERIES		<b>40 - 80"</b>	150 lbs (68 kg)	32 x 19.5 x 4.1" (825 x 496 x 104 mm)	200 x 200 - 800 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)	69
<b>LVSXU</b> CONNEXSYS SERIES		<b>42 - 80"</b>	150 lbs (68 kg)	19.1 x 35.5 x 4" (485 x 903 x 102 mm)	200 x 200 - 700 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)	69
<b>LVSXUP</b> CONNEXSYS SERIES		<b>40 - 80"</b>	150 lbs (68 kg)	32 x 19.5 x 4.1" (825 x 496 x 104 mm)	200 x 200 - 800 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)	69

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max Lateral Shift	Extension	Page
<b>LSMVU</b> FUSION™ SERIES		<b>37 - 63"</b>	150 lbs (68 kg)	21 x 34.6 x 3.7" (533 x 879 x 94 mm)	200 x 200 mm - 760 x 505 mm	17.5" (445 mm)	10.7" (272 mm)	70
<b>LSMVP</b> FUSION SERIES		<b>37 - 63"</b>	150 lbs (68 kg)	32.5 x 20.6 x 3.7" (826 x 523 x 94 mm)	200 x 200 mm - 800 x 400 mm	4" (102 mm)	10.7" (272 mm)	70
<b>MSMVU</b> FUSION SERIES		<b>26 - 47"</b>	125 lbs (56.7 kg)	16.5 x 25.5 x 3.7" (419 x 648 x 94 mm)	100 x 100 mm - 540 x 400 mm	14.5" (368 mm)	10.7" (272 mm)	71
<b>MSMVP</b> FUSION SERIES		<b>26 - 47"</b>	125 lbs (56.7 kg)	24.4 x 20.6 x 3.7" (620 x 523 x 94 mm)	100 x 100 mm - 600 x 400 mm	10" (254 mm)	10.7" (272 mm)	71

## SWING ARM TV WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max Lateral Shift	Page
<b>TS525TU</b> THINSTALL™ SERIES		<b>37 - 58"</b>	125 lbs (56.7 kg)	20.7 x 29.5 x 1.5" (527 x 749 x 38 mm)	100 x 100 mm - 800 x 400 mm	25" (635 mm)	16" (406 mm)	74
<b>TS325TU</b> THINSTALL SERIES		<b>26 - 52"</b>	75 lbs (34 kg)	17.3 x 22.6 x 1.8" (439 x 574 x 46 mm)	100 x 100 mm - 600 x 400 mm	25" (635 mm)	16" (406 mm)	74
<b>TS318TU</b> THINSTALL SERIES		<b>26 - 52"</b>	75 lbs (34 kg)	17.3 x 22.6 x 1.8" (439 x 574 x 46 mm)	100 x 100 mm - 600 x 400 mm	18" (457 mm)	16" (406 mm)	74
<b>TS318SU</b> THINSTALL SERIES		<b>26 - 52"</b>	75 lbs (34 kg)	13.5 x 22.6 x 1.8" (343 x 574 x 46 mm)	100 x 100 mm - 600 x 400 mm	18" (457 mm)	N/A	74
<b>TS218SU</b> THINSTALL SERIES		<b>26 - 47"</b>	75 lbs (34 kg)	14 x 13 x 1.5" (356 x 330 x 38 mm)	100 x 100 mm - 400 x 400 mm	18" (457 mm)	N/A	75
<b>TS118SU</b> THINSTALL SERIES		<b>10 - 32"</b>	35 lbs (15.9 kg)	11.6 x 13 x 1.5" (294 x 330 x 38 mm)	75 x 75 mm - 200 x 200 mm	18" (457 mm)	N/A	75
<b>TS110SU</b> THINSTALL SERIES		<b>10 - 32"</b>	35 lbs (15.9 kg)	9.4 x 14 x 1.5" (239 x 356 x 38 mm)	75 x 75 mm - 200 x 200 mm	9.85" (250 mm)	N/A	75
<b>PXRU</b> AUTOMATED		<b>37 - 65"</b>	150 lbs (68 kg)	19.2 x 27.6 x 4.5" (488 x 701 x 114 mm)	200 x 100 - 700 x 450 mm	27" (686 mm)	N/A	77

# QUICK REFERENCE CHART












 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT



















## SWING ARM TV WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max Lateral Shift	Page
<b>PDR</b>		 42 - 71"	200 lbs (90.7 kg)	22.0 x 39.5 x 3.4" (560 x 1003 x 86 mm)	200 x 200 mm - 862 x 517 mm	37" (940 mm)	9" (229 mm)	78
<b>PNR</b>		 42 - 71"	200 lbs (90.7 kg)	22 x 27.6 x 3.3" (559 x 701 x 84 mm)	200 x 200 mm - 862 x 517 mm	25" (635 mm)	9" (229 mm)	78

## VIDEO WALL TV CEILING MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Page
<b>LCM3X3U</b> FUSION <sup>®</sup> SERIES		 40 - 55"	3 wide x 3 tall Landscape	85 lbs (38.5 kg)	78.6 x 108.8 x 14.5" (199.6 x 276.3 x 36.8 cm)	Any width x 100 - 400 mm	81
<b>LCM3X2U</b> FUSION SERIES		 40 - 55"	3 wide x 2 tall Landscape	125 lbs (56.7 kg)	54.7 x 108.9 x 14.5" (138.9 x 276.6 x 36.8 cm)	Any width x 100 - 400 mm	81
<b>LCM3X2UP</b> FUSION SERIES		 40 - 55"	3 wide x 2 tall Portrait	125 lbs (56.7 kg)	78.6 x 68.8 x 14.5" (199.6 x 174.8 x 36.8 cm)	Any width x 100 - 400 mm	81
<b>LCM2X2U</b> FUSION SERIES	 	 40 - 55"	2 wide x 2 tall Landscape	125 lbs (56.7 kg)	54.7 x 72.9 x 14.5" (138.9 x 185.1 x 36.8 cm)	Any width x 100 - 400 mm	82
<b>LCM2X2UP</b> FUSION SERIES		 40 - 55"	2 wide x 2 tall Portrait	125 lbs (56.7 kg)	78.6 x 46.8 x 14.5" (199.6 x 118.9 x 36.8 cm)	Any width x 100 - 400 mm	82

## MENU BOARD TV CEILING MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Page
<b>LCM3X1U</b> FUSION SERIES	 	 40 - 55"	3 wide x 1 tall Landscape	125 lbs. (56.7 kg)	16.75 X 108.9 X 7.9" (42.5 x 276.6 x 20.1 cm)	Any width x 100 - 400 mm	2" (51 mm)	83
<b>LCM3X1UP</b> FUSION SERIES		 40 - 55"	3 wide x 1 tall Portrait	125 lbs. (56.7 kg)	32.5 X 68.9 X 7.9" (82.6 x 175 x 20.1 mm)	Any width x 100 - 800 mm	2" (51 mm)	83
<b>LCB3X1U</b> FUSION SERIES		 40 - 55"	3 wide x 1 tall Back-to-Back Landscape	125 lbs. (56.7 kg)	16.75 x 108.8 x 11.5" (42.5 x 276.3 x 29.2 cm)	Any width x 100 - 400 mm	2" (51 mm)	84
<b>LCB3X1UP</b> FUSION SERIES		 40 - 55"	3 wide x 1 tall Back-to-Back Portrait	125 lbs. (56.7 kg)	32.5 x 68.8 x 11.5" (82.6 x 174.8 x 29.2 cm)	Any width x 100 - 800 mm	2" (51 mm)	84
<b>LCM2X1U</b> FUSION SERIES	 	 40 - 55"	2 wide x 1 tall Landscape	125 lbs. (56.7 kg)	16.8 x 72.9 x 7.9" (42.7 x 185.1 x 20.1 cm)	Any width x 100 - 400 mm	N/A	84
<b>LCM2X1UP</b> FUSION SERIES		 40 - 55"	2 wide x 1 tall Portrait	125 lbs. (56.7 kg)	32.5 X 46.86 X 7.9" (82.6 x 119 x 20.1 cm)	Any width x 100 - 800 mm	N/A	85
<b>LCB2X1U</b> FUSION SERIES		 40 - 55"	2 wide x 1 tall Back-to-Back Landscape	100 lbs (45.3 kg)	16.75 X 72.86 X 11.64" (42.5 x 185.1 x 29.6 cm)	Any width x 100 - 400 mm	N/A	85
<b>LCB2X1UP</b> FUSION SERIES		 40 - 55"	2 wide x 1 tall Back-to-Back Portrait	100 lbs (45.3 kg)	32.5 X 46.86 X 11.64" (82.6 x 119 x 29.6 cm)	Any width x 100 - 800 mm	N/A	85



# QUICK REFERENCE CHART



= POPULAR PRODUCT



= QUALIFIES FOR LEED CREDIT

## CEILING TV MOUNTS

















Model	Product	Screen Size	Configuration	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Page
<b>XCM7000</b> FUSION <sup>®</sup> SERIES		 60 - 90"	Single Landscape	300 lbs (136 kg)	16.75 X 34.8 X 8" (425 x 884 x 203 mm)	200 x 100 - 800 x 400 mm	+7.5° / -20°	86
<b>XCB7000</b> FUSION SERIES		 60 - 90"	Back-to-Back Landscape	300 lbs (136 kg)	16.75 X 34.8 X 11.8" (425 x 884 x 300 mm)	200 x 100 - 800 x 400 mm	+7.5° / -20°	86
<b>XCM1U</b> FUSION SERIES		 60 - 90"	Single Landscape	250 lbs (113.4 kg)	16.75 x 34.8 x 7.9" (425 x 884 x 201 mm)	200 x 100 - 800 x 400 mm	+5°, -20°	87
<b>XCB1U</b> FUSION SERIES		 60 - 90"	Back-to-Back Landscape	200 lbs (90.7 kg)	16.75 x 34.8 x 11.64" (425 x 884 x 296 mm)	200 x 100 - 800 x 400 mm	+5°, -20°	87
<b>LCM1U</b> FUSION SERIES		 32 - 60"	Single Landscape	125 lbs (56.7 kg)	16.5 x 26.8 x 6.4" (420 x 681 x 162 mm)	200 x 100 - 616 x 400 mm	+5°, -20°	87
<b>LCM1UP</b> FUSION SERIES		 32 - 60"	Single Portrait	125 lbs (56.7 kg)	32.5 X 20.84 X 6.37" (826 x 529 x 162 mm)	200 x 100 - 460 x 800 mm	+5°, -20°	88
<b>LCB1U</b> FUSION SERIES		 32 - 60"	Back-to-Back Landscape	125 lbs (56.7 kg)	16.5 x 26.8 x 10.2" (420 x 681 x 259 mm)	200 x 100 - 616 x 400 mm	+5°, -20°	88
<b>LCB1UP</b> FUSION SERIES		 32 - 60"	Back-to-Back Portrait	125 lbs (56.7 kg)	32.5 x 20.8 x 10.2" (826 x 529 x 259 mm)	200 x 100 - 460 x 800 mm	+5°, -20°	88
<b>LCM1X2U</b> FUSION SERIES		 32 - 60"	1 wide x 2 tall Single-Sided Landscape	125 lbs (56.7 kg)	16.5 x 26.8 x 6.4" (420 x 681 x 162 mm)	200 x 100 - 616 x 400 mm	+5°, -20°	89
<b>LCB1X2U</b> FUSION SERIES		 32 - 60"	1 wide x 2 tall Back-to-Back Landscape	100 lbs (45.3 kg)	16.5 x 26.8 x 10.2" (420 x 681 x 259 mm)	200 x 100 - 616 x 400 mm	+5°, -20°	89
<b>LCM3U</b> FUSION SERIES		 32 - 65"	Multi-Directional, Triple	125 lbs (56.7 kg)	18.2 x 46.6 x 46.6" (46.2 x 118.4 x 118.4 cm)	200 x 100 - 600 x 400 mm	+5°, -20°	89
<b>LCM4U</b> FUSION SERIES		 32 - 65"	Multi-Directional, Quad	85 lbs (38.5 kg)	18.72 x 56 x 56" (47.5 x 142.2 x 142.2 cm)	200 x 100 - 600 x 400 mm	+5°, -20°	89
<b>MCM1U</b> FUSION SERIES		 26 - 50"	Single Landscape or Portrait	125 lbs (56.7 kg)	16.5 x 20.8 x 6.4" (420 x 529 x 162 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	90
<b>MCB1U</b> FUSION SERIES		 26 - 50"	Back-to-Back Landscape	125 lbs (56.7 kg)	16.5 x 20.8 x 10.2" (419 x 529 x 259 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	90
<b>MCM1X2U</b> FUSION SERIES		 26 - 50"	1 wide x 2 tall Single-Sided Landscape	125 lbs (56.7 kg)	16.5 x 20.8 x 6.4" (419 x 529 x 162 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	90
<b>MCB1X2U</b> FUSION SERIES		 26 - 50"	1 wide x 2 tall Back-to-Back Landscape	100 lbs (45.3 kg)	16.5 x 20.8 x 10.2" (420 x 529 x 259 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	90
Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Page
<b>CM2C40</b> AUTOMATED		 32 - 61"	190 lbs (86.2 kg)	31.3 x 23.8 x 7.8" (794 x 603 x 197 mm)	200 x 200 - 862 x 517 mm	N/A	N/A	96
<b>RLC1</b>		 26 - 47"	125 lbs (56.7 kg)	16.5 x 26.3 x 6.4" (419 x 669 x 162 mm)	Up to 610 x 400 mm	+5°, -20°	±3°	97

# QUICK REFERENCE CHART





















 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT

## CEILING TV MOUNTS

Model		Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Page
<b>RMCT</b>			 26 - 47"	125 lbs (56.7 kg)	16.5 x 20.3 x 6.4" (419 x 515 x 162 mm)	Up to 457 x 400 mm	+5°, -20°	+5°, -20°	97
<b>TPS</b>			 42 - 71"	150 lbs (68 kg)	16.2 x 17.1 x 1.1" (412 x 433 x 27 mm)	200 x 200 - 862 x 517 mm	N/A	N/A	97
<b>TPM</b>			 42 - 71"	150 lbs (68 kg)	16.2 x 17.1 x 3.4" (412 x 433 x 86 mm)	200 x 200 mm - 862 x 517 mm	±15°	N/A	98
<b>TPP</b>			 42 - 71"	150 lbs (68 kg)	16.2 x 17.1 x 4.1" (412 x 433 x 105 mm)	200 x 200 - 862 x 517 mm	±15°	N/A	98
<b>JHS</b>			 26 - 45"	75 lbs (34 kg)	6 x 6.6 x 5.1" (152 x 167 x 128 mm)	100 x 100 - 400 x 400 mm	±15°	N/A	98
<b>JPP</b>			 26 - 45"	75 lbs (34 kg)	7.5 x 6 x 3.5" (189 x 152 x 89 mm)	100 x 100 mm - 400 x 400 mm	±15°	N/A	99
<b>FHS</b>			 13 - 23"	40 lbs (18.1 kg)	5.4 x 4.6 x 4.6" (138 x 116 x 118 mm)	75 x 75 mm - 200 x 100 mm	±15°	N/A	99

## FREESTANDING VIDEO WALL TV MOUNTS

Model		Product	Screen Size	Configuration	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Page
<b>LVM3X3U</b> FUSION SERIES			 42 - 46"	3 wide x 3 tall Freestanding Landscape	100 lbs (45.4 kg)	92.5 x 108 x 40.4" (235 x 274.3 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	105
<b>LBM3X3U</b> FUSION SERIES			 42 - 46"	3 wide x 3 tall Bolt-down Landscape	100 lbs (45.4 kg)	90.9 x 108.9 x 9.5" (231 x 277 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	105
<b>LVM3X2U</b> FUSION SERIES			 42 - 46"	3 wide x 2 tall Freestanding Landscape	125 lbs (56.7 kg)	74.5 x 108 x 40.4" (189.3 x 274.3 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	105
<b>LVM3X2UP</b> FUSION SERIES			 42 - 46"	3 wide x 2 tall Freestanding Portrait	100 lbs (45.4 kg)	106.7 x 68 x 40.4" (271 x 172.7 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	105
<b>LBM3X2U</b> FUSION SERIES			 42 - 46"	3 wide x 2 tall Bolt-down Landscape	125 lbs (56.7 kg)	72.9 x 108.9 x 9.5" (185.2 x 276.6 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	106
<b>LBM3X2UP</b> FUSION SERIES			 42 - 46"	3 wide x 2 tall Bolt-down Portrait	100 lbs (45.4 kg)	98.6 x 68 x 9.7" (250.4 x 172.7 x 24.4 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	106
<b>LVM3X1UP</b> FUSION SERIES			 42 - 46"	3 wide x 1 tall Freestanding Portrait	125 lbs (56.7 kg)	88.7 x 68 x 40.4" (225.3 x 172.7 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	106
<b>LBM3X1UP</b> FUSION SERIES			 42 - 46"	3 wide x 1 tall Bolt-down Portrait	125 lbs (56.7 kg)	80.6 x 68 x 9.7" (204.7 x 172.7 x 24.4 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	106
<b>LVM2X2U</b> FUSION SERIES			 42 - 46"	2 wide x 2 tall Freestanding Landscape	125 lbs (56.7 kg)	80.5 x 72.5 x 40.4" (2045 x 1842 x 1026 mm)	Any Width x 100 - 400 mm	0.75" (19 mm)	107

# QUICK REFERENCE CHART



= POPULAR PRODUCT



= QUALIFIES FOR LEED CREDIT

## FREESTANDING VIDEO WALL TV MOUNTS

Model	Product	Screen Size	Configuration	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Page
<b>LVM2X2UP</b> FUSION <sup>™</sup> SERIES		 42 - 46"	2 wide x 2 tall Freestanding Portrait	100 lbs (45.4 kg.)	106.7 x 46 x 40.4" (271 x 116.8 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	107
<b>LBM2X2U</b> FUSION <sup>™</sup> SERIES		 42 - 46"	2 wide x 2 tall Bolt-down Landscape	125 lbs (56.7 kg)	72.9 x 72.9 x 9.5" (185.2 x 185.2 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	107
<b>LBM2X2UP</b> FUSION <sup>™</sup> SERIES		 42 - 46"	2 wide x 2 tall Bolt-down Portrait	100 lbs (45.4 kg)	98.6 x 46 x 9.7" (250.4 x 116.8 x 24 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	107

## FREESTANDING TV MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Page
<b>XVAU</b> FUSION SERIES		 37 - 70"	250 lbs (113 kg)	54.9 x 38.8 x 29.0" (139.5 x 98.6 x 73.7 cm)	200 x 200 - 800 x 400 mm	41.9 - 50.4" (106.4 - 128 cm)	±2.5°	109
<b>XPAU</b> FUSION SERIES		 55 - 100"+	300 lbs (136 kg)	73.9 x 58 x 34.5" (187.7 x 147.3 x 87.7 cm)	200 x 200 - 800 x 400 mm	48 - 66" (121.9 x 167.6 cm)	±5°	109
<b>LPAU</b> FUSION SERIES		 40 - 80"	200 lbs (90.7 kg)	77.9 x 45 x 33.3" (180.1 x 114 x 84.5 cm)	200 x 200 - 800 x 400 mm	50 - 70" (127 - 177 cm)	±5°	110
<b>LFAU</b> FUSION SERIES		 40 - 80"	200 lbs (90.7 kg)	72.4 x 38.1 x 30.6" (183.9 x 96.8 x 77.7 cm)	200 x 200 - 650 x 400 mm	44.5 - 64.5" (113 - 164 cm)	±5°	110
<b>MPAU</b> FUSION SERIES		 37 - 55"	125 lbs (56.7 kg)	77.9 x 47.8 x 32" (197.9 x 121.4 x 81.3 cm)	200 x 100 - 600 x 400 mm	50 - 70" (127 - 177 cm)	±5°	110
<b>MFAU</b> FUSION SERIES		 37 - 55"	125 lbs (56.7 kg)	72.4 x 38.1 x 30.6" (183.9 x 96.8 x 77.7 cm)	200 x 100 - 600 x 400 mm	44.5 x 64.5" (113 - 163 cm)	±5°	110

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Maximum Extension	Overall Travel	Page
<b>CM2L40</b> AUTOMATED		 31 - 61"	190 lbs (86.2 kg)	30.6 x 23.8 x 7.7" (77.8 x 60.3 x 19.5 cm)	200 x 200 - 862 x 517 mm	71" (180.3 cm)	40" (101.6 cm)	112

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Page
<b>PFC</b>		 42 - 71"	200 lbs (90.7 kg)	81.6 x 37.1 x 32.1" (207.3 x 94.3 x 81.6 cm)	200 x 200 - 862 x 517 mm	48.1 - 72.1" (122 - 183 cm)	±15°	113
<b>PF2</b>		 42 - 71"	200 lbs (90.7 kg)	94.5 x 36 x 43" (240 x 91.4 x 109.2 cm)	200 x 200 - 862 x 517 mm	51.4 - 85.4" (130 - 217 cm)	±15°	113
<b>PF1</b>		 42 - 71"	200 lbs (90.7 kg)	94 x 36 x 30" (238.8 x 91.4 x 76.2 cm)	200 x 200 - 862 x 517 mm	51.4 - 85.4" (130 - 217 cm)	±15°	113
<b>PFM</b>		 42 - 71"	200 lbs (90.7 kg)	57.2 x 36.1 x 25.2" (145.3 x 91.7 x 64 cm)	200 x 200 - 862 x 517 mm	37.6 - 49.6" (96 - 126 cm)	+45°, +15°	114
<b>PFQ</b>		 42 - 71"	200 lbs (90.7 kg)	29.5 x 36.1 x 25.2" (74.9 x 91.7 x 64 cm)	200 x 200 - 862 x 517 mm	19.9 - 21.9" (505 - 556 mm)	+45°, +15°	114
<b>MFC</b>		 30 - 55"	125 lbs (56.7 kg)	77.8 x 37.1 x 32.1" (197.5 x 94.3 x 81.6 cm)	100 x 100 - 709 x 431 mm	48 - 72" (122 - 183 cm)	±15°	114







# QUICK REFERENCE CHART









 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT
































## FREESTANDING TV MOUNTS

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Page
<b>MF2</b>		 30 - 55"	125 lbs (56.7 kg)	91.6 x 36 x 43" (232.7 x 91.4 x 109.2 cm)	100 x 100 - 709 x 431 mm	51.3 - 85.9" (130 - 218 cm)	±15°	115
<b>MF1</b>		 30 - 55"	125 lbs (56.7 kg)	91.6 x 36 x 30" (232.7 x 91.4 x 76.2 cm)	100 x 100 - 709 x 431 mm	51.3 - 85.9" (130 - 218 cm)	±15°	115

## TABLE STAND TV MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust	Swivel Options	Page
<b>STLU</b>		 32 - 52"	125 lbs (56.7 kg)	23.8 x 27 x 5.5" (603 x 686 x 140 mm)	100 x 100 - 600 x 400 mm	N/A	15°, 30°, 45° or 90°	118
<b>PSS</b>		 32 - 50"	150 lbs (68 kg)	20.7 x 16.3 x 9.3" (526 x 413 x 236 mm)	200 x 200 - 862 x 517 mm	6.5" (165 mm)	45°	118
<b>MTS</b>		 30 - 50"	100 lbs (45.4 kg)	23.2" x 17.8" x 6.9" (58.8 x 45.4 x 17.5 cm)	200 x 100 - 400 x 200 mm	3.75" (95 mm)	270°	118
<b>MSS</b>		 30 - 50"	150 lbs (68 kg)	19.3 x 14.3 x 9.3" (489 x 362 x 236 mm)	100 x 100 - 709 x 431 mm	5.25" (133 mm)	45°	119
<b>STS1</b>		 18 - 30"	30 lbs (13.6 kg)	16.1 x 6 x 6.9" (409 x 152 x 175 mm)	75 x 75 - 100 x 100 mm	5.1" (130 mm)	90°, 180°, 270°	119

## DESK MONITOR MOUNTS

Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
<b>K1C220</b> KONTOUR™ SERIES		3.5" (90 mm)	20.6" (523 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	122
<b>K1C210</b> KONTOUR SERIES	 	3.5" (90 mm)	13.9" (352 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	122
<b>K1C22H</b> KONTOUR SERIES		6.2" (156 mm)	23.1" (587 mm)	2 - 9 lbs (0.9 - 4.08 kg)	 	122
<b>K1C120</b> KONTOUR SERIES		5.5" (140 mm)	22.5" (571 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	123
<b>K1C110</b> KONTOUR SERIES		5.5" (140 mm)	15.7" (400 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	123
<b>K1D220</b> KONTOUR SERIES	 	4.1" (105 mm)	21.6" (548 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	123
<b>K1D22H</b> KONTOUR SERIES	 	4.3" (108 mm)	21.2" (539 mm)	2 - 9 lbs (0.9 - 4.08 kg)	 	124
<b>K1D120</b> KONTOUR SERIES	 	3.6" (92 mm)	20.6" (523 mm)	5 - 25 lbs (2.3 - 11.3 kg)	 	124
<b>K2C220</b> KONTOUR SERIES		4.1" (105 mm)	17.6" (448 mm)	25 lbs (11.3 kg)	 	126

## QUICK REFERENCE CHART



= POPULAR PRODUCT



= QUALIFIES FOR LEED CREDIT

## DESK MONITOR MOUNTS

Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
<b>K2C22H™</b> KONTOUR SERIES		6.2" (156 mm)	19.7" (500 mm)	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	126
<b>K2C120</b> KONTOUR SERIES		6" (152 cm)	19.5" (495 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>	127
<b>K2C110</b> KONTOUR SERIES		6" (152 cm)	12.8" (324 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>	127

Model	Product	Maximum Height (per monitor)	Maximum Width (per monitor)	Tilt	Typical Screen Size	Weight Cap. (per monitor)	Colors	Page
<b>K3F220</b> KONTOUR SERIES		18.1" (460 mm)	29" (736 mm)	±12°	10 - 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	130
<b>K3G220</b> KONTOUR SERIES		18.1" (460 mm)	29" (736 mm)	±12°	10 - 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	130
<b>K3F310</b> KONTOUR SERIES		N/A	Dual: 25.6" (65 cm) Triple: 51.2" (130 cm)	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	130
<b>K3G310</b> KONTOUR SERIES		N/A	Dual: 25.6" (65 cm) Triple: 51.2" (130 cm)	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	131
<b>K3F120</b> KONTOUR SERIES		18.1" (460 mm)	N/A	±10°	10 - 30"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	131
<b>K3G120</b> KONTOUR SERIES		18.1" (460 mm)	N/A	±10°	10 - 30"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	131










































Model	Product	Center of Display to Floor/Table Range	Maximum Monitor Width	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Color	Page
<b>K4G610</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	<b>B</b>	133
<b>K4G510</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	<b>B</b>	133
<b>K4G410</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	<b>B</b>	134
<b>K4G310</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	<b>B</b>	134
<b>K4G210</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	37.1" (943 mm)	9.4" (239 mm)	up to 30"	15 lbs (6.8 kg)	<b>B</b>	134
<b>K4G120</b> KONTOUR SERIES		11.5 - 18.2" (291 - 463 mm)	16" (406 mm)	9.4" (239 mm)	up to 30"	15 lbs (6.8 kg)	<b>B</b>	134




# QUICK REFERENCE CHART





 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT

## WALL MONITOR MOUNTS

Model	Product	Minimum Depth from Wall	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
<b>K1W220</b> KONTOUR™ SERIES  		2.5" (62 mm)	20.7" (525 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	 	137
<b>K1W22H</b> KONTOUR SERIES 		3.1" (79 mm)	20.8" (529 mm)	+75°, -10°	2 - 9 lbs (0.9 - 4.08 kg)	 	137
<b>K1W120</b> KONTOUR SERIES 		2.5" (62 mm)	20.2" (512 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	 	137
<b>K1W110</b> KONTOUR SERIES 		2.5" (62 mm)	13.4" (341 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	 	138
<b>K1S220</b> KONTOUR SERIES 		2.5" (62 mm)	21.8" (553 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	 	138
<b>K1S120</b> KONTOUR SERIES 		2.5" (62 mm)	20.1" (510 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	 	138
<b>K1S22H</b> KONTOUR SERIES 		3.1" (79 mm)	21.4" (544 mm)	+75°, -10°	2 - 9 lbs (0.9 - 4.08 kg)	 	138
<b>K2W220</b> KONTOUR SERIES 		2.9" (76 mm)	17.7" (450 mm)	±15°	25 lbs (11.3 kg)	 	140
<b>K2W22H</b> KONTOUR SERIES 		3.1" (79 mm)	17.4" (441 mm)	±15°	15 lbs (6.8 kg)	 	140
<b>K2W120</b> KONTOUR SERIES 		2.9" (75 mm)	17.2" (437 mm)	±15°	40 lbs (18.1 kg)	 	141
<b>K2W110</b> KONTOUR SERIES 		2.9" (79 mm)	10.5" (265 mm)	±15°	40 lbs (18.1 kg)	 	141

Model	Product	Min. Depth from Wall	Typical Screen Size	Tilt	Mounting Patterns (WxH)	Weight Capacity	Colors	Page
<b>KOW100</b>		2.6" (66 mm)	10 - 30"	+75°, -10°	75 x 75 mm - 100 x 100 mm	25 lbs (11.3 kg)	 	142

Model	Product	Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Cap. (per monitor)	Page
<b>K4W310</b> KONTOUR SERIES 		24.2" (614 mm)	16.2" (412 mm)	9.4" (239 mm)	0 - 20°	up to 24"	±12°	15 lbs (6.8 kg)	143
<b>K4W210</b> KONTOUR SERIES		37.1" (943 mm)	16.2" (412 mm)	9.4" (239 mm)	0 - 20°	up to 30"	±12°	15 lbs (6.8 kg)	143
<b>K4W120</b> KONTOUR SERIES		16" (406 mm)	16.2" (412 mm)	3.7" (94 mm)	N/A	up to 24"	±10°	15 lbs (6.8 kg)	144

## QUICK REFERENCE CHART



= POPULAR PRODUCT



= QUALIFIES FOR LEED CREDIT

## POLE MONITOR MOUNTS

Model	Product	Minimum Depth from Pole	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
<b>K1P220</b> KONTOUR™ SERIES		2.5" (64 cm)	20.1" (510 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>	145
<b>K1P22H</b> KONTOUR SERIES		3.1" (79 mm)	17.4" (441 mm)	+75°, -10°	2 - 9 lbs (0.9 - 4.08 kg)	<b>S</b> <b>B</b>	145
<b>K1P120</b> KONTOUR SERIES		2.5" (64 cm)	19.4" (493 mm)	+75°, -10°	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>	146
<b>K1P110</b> KONTOUR SERIES		2.5" (64 cm)	12.7" (322 mm)	+75°, -10°	25 lbs (11.3 kg)	<b>S</b> <b>B</b>	146
<b>K2P220</b> KONTOUR SERIES		2.9" (75 mm)	17.1" (434 mm)	±15°	25 lbs (11.3 kg)	<b>S</b> <b>B</b>	148
<b>K2P22H</b> KONTOUR SERIES		3.1" (79 mm)	16.8" (425 mm)	±15°	15 lbs (6.8 kg)	<b>S</b> <b>B</b>	148
<b>K2P120</b> KONTOUR SERIES		2.9" (74 mm)	16.6" (422 mm)	±15°	40 lbs (18.14 kg)	<b>S</b> <b>B</b>	149
<b>K2P110</b> KONTOUR SERIES		2.9" (74 mm)	9.9" (250 mm)	±15°	40 lbs (18.14 kg)	<b>S</b> <b>B</b>	149
<b>KOP100</b>		2.6" (66 mm)	N/A	+75°, -10°	25 lbs (11.3 kg)	<b>S</b> <b>B</b>	150

## TABLET MOUNTS

Model	Product	Dimensions (HxWxD)	Tilt	Weight Capacity (per monitor)	Page
<b>KOW100BXi2B</b>		11.2 x 8.6 x 0.9" (286 x 217 x 24 mm)	+40°, -10°	2 lbs (0.9 kg)	152
<b>KOW100BXi2TB</b>		11.2 x 8.6 x 0.9" (286 x 217 x 24 mm)	+40°, -10°	2 lbs (0.9 kg)	152
<b>FSRi2T</b>		11.4 x 8.1" (290 x 206 mm)	N/A	2 lbs (0.9 kg)	152

Model	Product	Maximum Extension	Minimum Depth	Tilt	Desktop Thickness	Weight Capacity (per monitor)	Page
<b>K1D220BXi2B</b>		19.9" (506 mm)	2.1" (53 mm)	+75°, -10°	0.75 - 2.5" (19 - 64 mm)	5 - 25 lbs (2.3 - 11.3 kg)	153

Model	Product	Manual Height Adjustment	Minimum Depth	Tilt	Desktop Thickness	Weight Capacity	Page
<b>K1C120BXi2B</b>		10.7" (273 mm)	2.1" (53 mm)	+75°, -10°	0.5 - 3.25" (13 - 83 mm)	5 - 25 lbs (2.3 - 11.3 kg)	153


















# QUICK REFERENCE CHART

 = POPULAR PRODUCT

 = QUALIFIES FOR LEED CREDIT

 = RACKBUILDER™ DELIVERED

## RACK SYSTEMS

Model	Product	Available Depths	Available Heights	Page	
<b>S1 SERIES</b> KNOCK DOWN RACKS		23 or 28" (584 or 711 mm) Depths	12, 20, 28, 36, 41 or custom space	155 - 156	
<b>G1 SERIES</b> GANGABLE RACKS	 	23 or 33" (584 or 838 mm) Depths	28, 36 or 44 space	157 - 158	
<b>E1 SERIES</b> ENCLOSED RACKS	 	23 or 28" (584 or 711 mm) Depths	20, 28, 36 or 44 space	159 - 160	
Model	Product	Available Depths	Available Heights	Colors	Page
<b>F1 SERIES</b> FREESTANDING RACKS	 	20" (508 mm) Depth	12, 20 or 28 space		161
Model	Product	Available Depths	Available Heights	Page	
<b>ROTR</b> ROTATING RACKS		18.9" (480 mm) Depth	8 - 24 or custom space	163	
<b>ROTR-XL</b> ROTATING RACKS		22.9" (582 mm) Depth	8 - 24 or custom space	163	
<b>ROTR-HD</b> ROTATING RACKS		23.5" (597 mm) Depth	24 - 44 or custom space	163	
<b>W2 SERIES</b> FIXED WALL RACKS	 	16.54" (420 mm) Depth	8 or 12 space	165	
<b>W1 SERIES</b> FIXED WALL RACKS	 	10.25 or 15.25" (260 or 387 mm) Depths	12, 20, 28 or 36 space	165	
<b>SWR</b> SECTIONAL WALL RACKS		12 or 17" (305 or 432 mm) Depths	10, 18 or 24 space	166	
<b>RWM</b> RELAY WALL RACKS		18" (457 mm) Depth	13, 24 or 42 space	166	



# QUICK REFERENCE CHART



= POPULAR PRODUCT








= QUALIFIES FOR LEED CREDIT



= RACKBUILDER™ DELIVERED

## RACK SYSTEMS

Model	Product	Available Depths	Available Heights	Page
<b>RFM</b> RELAY FLOOR RACKS		17" (432 mm) Depth	24, 35 or 42 space	166
<b>PWR</b> PIVOT WALL RACKS		23.25" (591 mm) Depth	40 space	166
<b>ER</b> FREE STANDING RACKS		16 or 18" (406 or 457 mm) Depths	40 space	168
<b>ERS</b> SLANTED FREE STANDING RACKS		Varies	10, 18, 12 + 8 or 12 + 16 space	168

Model	Product	Available Depths	Available Heights	Colors	Page
<b>ERK</b> ELITE FREE STANDING RACKS		14 or 18" (356 or 457 mm) Depths	4, 8, 12, 16, 20, 12 + 8, 16 20 or 24 space	<b>M</b> <b>B</b>	169
<b>ECR SERIES</b> ELITE CONVERTA RACK & POP-UP MIXER		18" (457 mm) Depth	10 + 10 space or 16 + 10 space <i>mixer spaces are 5" (127 mm) deep</i>	<b>CH</b> <b>WT</b>	171
<b>ECR SERIES</b> STEEL ELITE CONVERTA RACK & POP-UP MIXER		24" (610 mm) Depth	16 + 12 space <i>mixer spaces are 5" (127 mm) deep</i>	<b>S</b> <b>B</b>	171
<b>ERT SERIES</b> ELITE ROLL TOP DESKS		23.5" (597 mm) Depth	14 or 14 + 14 space	<b>CH</b> <b>WT</b> <b>S</b>	173



## CEILING PROJECTOR MOUNTS

### RPA ELITE® SERIES PROJECTOR MOUNT FEATURES



**MICROZONE™ ADJUSTMENTS**  
Makes projector registration fast and precise. Mounting options include 1 ½" NPT, 0.25" (6 mm) threaded rod and flush installations.



**CENTRIS® TECHNOLOGY**  
Enables effortless fingertip positioning and self-adjusts to support different projector weights.



**CABLE MANAGEMENT**  
Route cables through the top of the mount without additional accessories.



**QUICK CONNECT/DISCONNECT**  
Disconnecting maintains registration without affecting pre-set adjustments.



**SECURITY**  
Keyed locking options (A/B/C/D) and steel-into-steel locking hardware at all connection points to protect against theft.



**INTERFACE OPTIONS**  
Choose a custom or universal interface bracket.

## RPMA RPA ELITE® PROJECTOR MOUNT



Chief's elite ceiling projector mounts are packed with easy-to-use features that save time and provide projector security.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
50 lbs (22.7 kg)	3°, 20°, 360°	2.7 x 6.5 x 5.5" (69 x 165 x 140 mm)	



## RPMA1 RPA ELITE® SECURITY MOUNT



Designed for high-risk installations, this mount provides integrated security in a compact, universal design.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
50 lbs (22.7 kg)	3°, 20°, 360°	3.9 x 14.7 x 12.2" (99 x 374 x 310 mm)	



## KITES003 SUSPENDED CEILING KIT

Bundled kit includes:

- RPMAU Elite Universal Projector Mount
- CMS003 3" (76 mm) Extension Column
- CMS440 Lightweight Suspended Ceiling Kit
- Available in Black



## KITEZ006 SUSPENDED CEILING KIT

Bundled kit includes:

- RPMAU Elite Universal Projector Mount
- CMSZ006 Fully Threaded Extension Column 0 - 6" (0 - 152 mm)
- CMS440 Lightweight Suspended Ceiling Kit
- Available in Black, White & Silver



## KITES003P SUSPENDED CEILING KIT

Bundled kit includes:

- RPMAU Elite Universal Projector Mount
- CMS003 3" (76 mm) Fixed Extension Column
- CMS440 Suspended Ceiling Kit
- CMA470 Plenum Rated Above-Tile Storage Accessory
- Available in Black



## RSMA MINI ELITE® PROJECTOR MOUNT



Ideal for smaller projector models, these miniature versions of the RPA Elite mounts include all the same great features in almost half the size.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
25 lbs (11.3 kg)	3°, 15°, 360°	1.8 x 4.4 x 5.1" (46 x 111 x 129 mm)	



## KITMD003 CEILING PROJECTOR MOUNT KIT

Bundled kit includes:

- RSMAU Mini Elite® Universal Projector Mount (Lock A)
- CMS003 3" (76 mm) Fixed Extension Column
- CMS115 6" (152 mm) Speed-Connect Ceiling Plate
- Available in Black & White



## KITMZ006 SUSPENDED CEILING KIT

Bundled kit includes:

- RMAUS Mini Elite® Universal Projector Mount
- CMSZ006 6" (152 mm) Fully Threaded Extension Column
- CMS440 Lightweight Suspended Ceiling Kit
- Available in Black, White & Silver



## KITMA0305 CEILING PROJECTOR MOUNT KIT

Bundled kit includes:

- RSMAU Mini Elite® Universal Projector Mount (Lock A)
- CMS0305 3 - 5' (91 - 152 cm) Adjustable Extension Column
- CMA395 Angled Ceiling Plate
- Available in Black & White



## RPA® SERIES CEILING MOUNTS

### FEATURES



#### INDEPENDENT ADJUSTMENTS

Includes roll, pitch and yaw adjustments for quick and precise projector alignment.



#### QUICK CONNECT/DISCONNECT

Disconnecting maintains registration without affecting pre-set adjustments.



#### ALL-POINTS SECURITY

Exclusive steel-into-steel locking hardware at all connection points to protect against theft.



#### MULTIPLE INSTALLATION OPTIONS

Mounting options include: flush mount to ceiling, use 0.25" (6 mm) threaded rods or use a 1 1/2" NPT threaded extension column.



#### INTERFACE OPTIONS

Choose a custom or universal interface bracket.



#### KEYED SECURITY

Keyed locking options (A/B/C) and steel-into-steel locking hardware at all connection points to protect against theft.

### RPA PROJECTOR MOUNT



The top-selling ceiling projector mount in the industry! This standard ceiling projector mount is installed in more offices, schools and homes than any other mount.



Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
50 lbs (22.7 kg)	4°, 25°, 360°	1.8 x 6.5 x 5.5" (44 x 165 x 140 mm)	

### RPAA1 RPA SECURITY MOUNT



Designed for high-risk installations, this mount provides integrated security in a compact, universal design.



Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
50 lbs (22.7 kg)	4°, 25°, 360°	3.4 x 16.2 x 12.1" (86 x 411 x 307 mm)	

## KITPS003 SUSPENDED CEILING KIT

Bundled kit includes:

- RPAU Universal Projector Mount
- CMS003 3" (76 mm) Fixed Extension Column
- CMS440 Lightweight Suspended Ceiling Kit
- Available in Black & White



## KITPA018024 ANGLED CEILING KIT

Bundled kit includes:

- RPAU Universal Projector Mount
- CMS018024 18-24" (457-610 mm) Adjustable Extension Column
- CMA395 Angled Ceiling Plate
- Available in Black



## RSA MINI RPA PROJECTOR MOUNT



Offers a compact design for smaller projectors with all the same great features as the standard RPA Series.



Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
25 lbs (11.3 kg)	3°, 20°, 360°	1.4 x 4.4 x 4.4" (37 x 111 x 112 mm)	W S B

## KITAS003 SUSPENDED CEILING KIT

Bundled kit includes:

- RSAU Universal Projector Mount
- CMS003 3" (76 mm) Fixed Extension Column
- CMS440 Lightweight Suspended Ceiling Kit
- Available in Black & White



## KITAB003 SUSPENDED CEILING KIT

Bundled kit includes:

- RSAU Mini Universal Projector Mount
- CMS003 3" (76 mm) Fixed Extension Column
- CMA455 Suspended Ceiling Tile Replacement Kit
- Available in Black





# APPLICATION SPECIFIC

## CEILING PROJECTOR MOUNTS

### LCDA NON-INVERTED UNIVERSAL MOUNT



A solution for installations requiring upright LCD/DLP projectors. Dimensions vary by model; see website for details.

Weight Capacity	Roll, Pitch and Yaw	Max Dimensions (HxWxD)	Color
50 lbs (22.7 kg)	5°, 90°, 360°	10.8 - 16" (274 - 406 mm) x 14.13 - 19.6" (359 - 498 mm) x 22.25" (565 mm)	



### VCM HEAVY DUTY MOUNT



Heavy-duty steel mount for mounting heavy LCD projectors. Micro adjustments allow you to quickly achieve registration.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Color
250 lbs (113.4 kg)	5°, 20°, 360°	3.8 x 17 x 9.3" (97 x 432 x 235 mm)	






## CEILING PROJECTOR MOUNT ACCESSORIES






CMA105	Weight Capacity
Ceiling Plate - 4" (102 mm)	500 lbs (226.8 kg)






CMA110	Colors	Weight Capacity
Ceiling Plate - 8" (203 mm)	  	500 lbs (226.8 kg)






CMA115	Colors	Weight Capacity
Ceiling Plate - 6" (152 mm)	  	500 lbs (226.8 kg)



CMA101	Colors	Weight Capacity
Designer Ceiling Plate	  	500 lbs (226.8 kg)



CMS115	Colors	Weight Capacity
Speed-Connect™ Ceiling Plate	  	500 lbs (226.8 kg)





CMA330	Weight Capacity
Offset Ceiling Plate - 8" (203 mm)	500 lbs (226.8 kg)



CMA345	Weight Capacity
Shock Absorption Ceiling Plate	500 lbs (226.8 kg)



CMA395	Colors	Weight Capacity
Angled Ceiling Plate	 	500 lbs (226.8 kg)



CMA360	Weight Capacity
I-Beam Clamp	250 lbs (113.4 kg)



CMA365	Weight Capacity
Truss Ceiling Adapter	250 lbs (113.4 kg)



CMS390/391	Weight Capacity
Dual Joist Ceiling Adapters - 16" (406 mm) / 24" (609 mm)	500 lbs (226.8 kg)



CMA362	Weight Capacity
C-Clamp	250 lbs (113.4 kg)



CMA366	Weight Capacity
Architectural Spanning Adapter	250 lbs (113.4 kg)



CMA347	Weight Capacity
Vibration Isolating Coupler	35 lbs (15.9 kg)



CMA440	Weight Capacity
Above-Tile Suspended Ceiling Kit	50 lbs (22.7 kg)



CMS440	Weight Capacity
Speed-Connect Above-Tile Suspended Ceiling Kit	50 lbs (22.7 kg)



CMS440P	Weight Capacity
Suspended Ceiling Kit w/ Power	50 lbs (22.7 kg)



CMS495	Weight Capacity
Angled Suspended Ceiling Adapter	50 lbs (22.7 kg)

## CEILING PROJECTOR MOUNT ACCESSORIES



CMA470	Compatibility
Above-Tile Storage Accessory	CMS440, CMA440, CMA450 and CMA455 ceiling kits



CMA471	Compatibility
Large Above-Tile Storage Accessory	CMS440, CMA440, CMA450 and CMA455 ceiling kits



CMA472	Compatibility
Plenum Rated Above-Tile Storage Accessory	CMS440, CMA440



CMA473	Compatibility
XL Plenum Storage Enclosure	CMS440, CMA440



CMS490	Weight Capacity
Above-Tile Storage Accessory	50 lbs (22.7 kg)




CMA450	Weight Capacity
Heavy Duty Suspended Ceiling Kit	250 lbs (113.4 kg)



CMA455	Weight Capacity
Suspended Ceiling Tile Replacement Kit	250 lbs (113.4 kg)



CMS445	Weight Capacity
Speed-Connect Suspended Ceiling Tile Replacement Kit	50 lbs (22.7 kg)



CMS445P	Weight Capacity
Suspended Ceiling Replacement Kit with Power Outlet Conditioner	50 lbs (22.7 kg)



CMA290	Quantity
Wire Suspension Locks	10 pack



CMS Fixed Columns		Weight Capacity	
Fixed 1 ½" NPT extension columns available in black, silver and white†		500 lbs (226.8 kg)	
Model	Length	Model	Length
CMS003*	3" (76 mm)	CMS024	2' (0.6 m)
CMS006*	6" (152 mm)	CMS036	3' (0.9 m)
CMS009	9" (229 mm)	CMS048	4' (1.2 m)
CMS012	12" (305 mm)	CMS060	5' (1.5 m)
CMS018	18" (457 mm)	CMS072	6' (1.8 m)

*\* Steel construction. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.*



CMSZ006	Colors	Weight Capacity
0-6" (152 mm) Fully Threaded Column	<b>S</b> <b>B</b>	500 lbs (226.8 kg)



CMS Adjustable Columns		Weight Capacity	
Adjustable 1 ½" NPT extension columns available in black, silver and white*		500 lbs (226.8 kg)	
Model	Length	Model	Length
CMS006009	6-9" (152-229 mm)	CMS0507	5-7' (1.5-2.1 m)
CMS009012	9-12" (229-305 mm)	CMS0608	6-8' (1.8-2.4 m)
CMS012018	12-18" (305-457 mm)	CMS0709	7-9' (2.1-2.7 m)
CMS018024	18-24" (457-610 mm)	CMS0810	8-10' (2.4-3.1 m)
CMS0203	2-3' (0.6-0.9 m)	CMS0911	9-11' (2.7-3.4 m)
CMS0305	3-5' (0.9-1.5 m)	CMS1012*	10-12' (3.1-3.7 m)
CMS0406	4-6' (1.2-1.8 m)		

*\* Cannot ship by UPS due to length. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.*



CMA274/275	Compatibility
Quick-Snap Cable Covers - (Qty 1 / Qty 3) 4" (101 mm) long	1 1/2" & 2" NPT Columns



CMA273	Compatibility
Threaded End Cap	1 ½" NPT Columns



CMA278	Compatibility
Vinyl End Cap (Qty 10)	1 ½" NPT & CPA Columns



CMA640	Compatibility	Colors
Decorative Ring, 1.9" (48 mm) ID	1 ½" NPT & CPA Columns	W S B



CMA643	Compatibility
Decorative Ring, 2.44" (62 mm) ID - Silver	CMS Outer Adjustable Columns



CMA700	Colors	Weight Capacity
6" (152 mm) Ceiling Plate with Adjustable Column	W S B	500 lbs (226.8 kg)



CMA100	Colors	Weight Capacity
8" (203 mm) Ceiling Plate with Adjustable Column	W S B	500 lbs (226.8 kg)



CMS261	Colors	Weight Capacity
CMS Column Cut-Off Adapter	W S B	500 lbs (226.8 kg)



CMA151	Weight Capacity
Adapter/Reducer 1 ½" NPT to 1" NPT	250 lbs (113.4 kg)



CMSH3	Colors	Weight Capacity
Column Height Adjustment Accessory, 3" (76 mm)	S B	25 lbs (11.3 kg)



CMA502	Weight Capacity
Single Electric Power Outlet Coupler	500 lbs (226.8 kg)



CMA504	Weight Capacity
Dual Electric Power Outlet Coupler	500 lbs (226.8 kg)



CMA351	Weight Capacity
Heavy Duty Swivel Adapter	500 lbs (226.8 kg)



CMA152	Weight Capacity
Threaded Pipe Coupler with Cable Slot	500 lbs (226.8 kg)



CMA270	Color	Weight Capacity
Threaded Pipe Coupler	W S B	500 lbs (226.8 kg)



CMA106	Weight Capacity
Junction Box Assembly Ceiling Plate	50 lbs (22.7 kg)



PX2W	Compatibility
Power Conditioner Outlet	Rated for 2160 joules and 15 amps



CMA170	Weight Capacity
Storage Accessory	25 lbs (11.3 kg)



CMA480	Weight Capacity
Column Storage Shelf	25 lbs (11.3 kg)

# CEILING PROJECTOR MOUNT ACCESSORIES



CMA160	Weight Capacity
Installation Job Box Coupler	250 lbs (113.4 kg)



LSB100	Weight Capacity
RPA Projector Lateral Shift Bracket	0-3" (0-76 mm) = 50 lbs (22.7 kg) 3-5.25" (76-133 mm) = 15 lbs (6.8 kg)



LSB101	Weight Capacity
Lateral Shift Bracket for RPM	50 lbs (22.7 kg)



PG1A	Max Equipment Size (HxWxD)	Colors
Large Projector Guard	7.5 x 20 x 20.4" (191 x 508 x 518 mm)	<b>B</b> <b>W</b>



PG2A	Max Equipment Size (HxWxD)	Colors
Small Projector Guard	7.5 x 16 x 16" (191 x 406 x 406 mm)	<b>B</b> <b>W</b>



PG3A	Max Equipment Size (HxWxD)	Colors
Extra Large Projector Guard	11.4 x 25 x 24.9" (288 x 635 x 633 mm)	<b>B</b> <b>W</b>



PL1	Lock Options
RPA Large Projector Lock	A/B/C



PL2	Lock Options
RPA Small Projector Lock	A/B/C



SA1
Security Anchor



HC1	Includes
Heavy-Duty Cable system	SA1, cable, padlock, security pads, super glue



LC1	Includes
Security Cable Lock Kit	coiled cable, padlock, security pads, super glue



PL4	Includes
Projector Security Cable Lock	cable, security pad, lock housing



SSC			
Secure Screw Cover kits			
Model	Compatibility	Model	Compatibility
SSC1	Covers screws up to #10 (M5)	SSC3	Covers screws up to 0.31" (M8)
SSC2	Covers screws up to 0.24" (M7)	SSC4	Includes three SSC1 and two SSC3



PMSC	Includes
Security Cable Lock	two cable and lock sets



SEC2	Compatibility
Security Cable Kit for SLBU	RSMA and RSA Mounts and RPA and RPA Elite Security Series



LCD2C	Compatibility
Dual Projector Ceiling Stacker	Requires two RPA or RPM projector mounts



LCD2TS	Compatibility
Dual Projector Table Stand Stacker	Requires two RPA or RPM projector mounts



Lcdb	Weight Capacity
Stacker Base	100 lbs (45.5 kg)



Lcdpa	Compatibility
Stacker Arm	RPA and RPM projector mounts



Lcdcp	Weight Capacity
Stacker Ceiling Plate	100 lbs (45.5 kg)



Cma250	Weight Capacity
LCD Flush Mount Adapter	500 lbs (226.8 kg)



Cmsi
Interactive Ceiling-Mounted Projector Solution



Tma100	Weight Capacity
Projector Tripod Mount	25 lbs (11.3 kg)



Lpk1	Compatibility
VCM Flush mount Adapter	VCM





## AUTOMATED PROJECTOR MOUNTS

### AUTOMATED PROJECTOR MOUNTS FEATURES



#### QUIET OPERATION

Provides exceptionally smooth and quiet movement, making it a great option for homes and corporate offices.



#### MULTIPLE CONTROL OPTIONS

Choose from single momentary push-button, low-voltage controller and IR options. Also accepts 5-30V AC/DC for triggering commands. AMX/Crestron control compatibility.



#### SAFE & SUSTAINABLE

CE, UL, TUV, FC and WEEE certifications recognize safe design and environmentally friendly construction.



#### MULTIPLE INSTALLATION OPTIONS

Multiple mounting options for finished and suspended ceilings including 1 1/2" NPT threaded extension columns, threaded rods and suspension cables.

## SL220 SMART-LIFT



Simple 3-step installation process requires only one person. Designed to fit 2 x 2' (600 x 600 mm) suspended ceiling systems.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
30 lbs (13.6 kg)	8.5" (216 mm)	9.5 x 16.5 x 18.5" (241 x 419 x 470 mm)	11.2 x 23.5 x 23.5" (284 x 597 x 597 mm)	19.3 x 20.7" (489 x 526 mm)



## SL236 SMART-LIFT



Provides 36" (914 mm) of downward travel with three stopping positions. Includes adjustments for precise positioning.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
35 lbs (15.9 kg)	36" (914 mm)	9.3 x 20.5 x 22.8" (235 x 521 x 578 mm)	11.1 x 25.5 x 28.5" (282 x 648 x 724 mm)	23.9 x 23.9" (607 x 607 mm)



## SL151 SMART-LIFT



Provides exceptionally smooth and quiet movement. Great for suspended and finished ceilings in homes and corporate offices.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
35 lbs (15.9 kg)	8.3" (211 mm)	8.4 x 18.3 x 18.3" (213 x 464 x 464 mm)	11.2 x 23.5 x 23.5" (284 x 597 x 597 mm)	20.2 x 20.3" (514 x 515 mm)



# AUTOMATED PROJECTOR MOUNT ACCESSORIES



IR10	Compatibility
Infrared Remote Control	SL151, SL236 and SL220



RC10	Compatibility
RF Remote Control	SL151 and SL236



ASP401	Compatibility
Individual Control System	SL151, SL236 and SL220



SMA602	Compatibility
Smart-Lift Single Column Mounting Plate	SL151 and SL236



SMA620	Compatibility
Suspended Ceiling Installation and Track Clip Kit	SL236



SMA651	Compatibility
Threaded Rod Adapter	SL236






UPB1	Compatibility
Smart-Lift Upright Projector Interface Bracket	SL151



SUSTAINABILITY

## WALL PROJECTOR MOUNTS

### WM SERIES SHORT THROW MOUNTS FEATURES

- 
**PRECISION HEIGHT AND LEVELING**  
 Industry-first micro height and leveling adjustment.
- 
**FAST INSTALLATION**  
 Innovative quick-connect system for a speedy install.
- 
**INTEGRATED CABLE MANAGEMENT**  
 Fully internal cable management system conceals and protects cables for a clean finish.
- 
**VARIABLE EXTENSION OPTIONS**  
 Telescoping extension and infinite projector placement make it easy to achieve a picture perfect installation.
- 
**MULTIPLE INSTALLATION OPTIONS**  
 Designed for mounting to concrete, block wall, brick, wood or steel studs. Hardware Included.



PRECISION HEIGHT  
& LEVELING



VARIABLE EXTENSION  
OPTIONS

**WM210AUS** EXTENDS UP TO 20" (508 mm)

Small dual stud short throw mount. Includes RSMA Mini Elite® Projector Mount. For short throw arm only, order WM210S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 23.1" (293 x 499 x 586 mm)

**WM220AUS** EXTENDS UP TO 30" (762 mm)

Medium dual stud short throw mount. Includes RSMA Mini Elite Projector Mount. For short throw arm only, order WM220S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 35.6" (293 x 499 x 904 mm)

**WM230AUS** EXTENDS UP TO 55" (140 cm)

Large dual stud short throw mount. Includes RSMA Mini Elite Projector Mount. For short throw arm only, order WM230S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 59.6" (29 x 50 x 151 cm)

**WM240AUS** EXTENDS UP TO 66" (168 cm)

Extra large dual stud short throw mount. Includes RSMA Mini Elite Projector Mount. For short throw arm only, order WM240S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 70.4" (29 x 50 x 179 cm)



**WM110AUS** EXTENDS UP TO 18" (457 mm)

Small single stud short throw mount. Includes RSMA Mini Elite® Projector Mount. For short throw arm only, order WM110S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 21.7" (360 x 185 x 551 mm)

**WM120AUS** EXTENDS UP TO 29" (737 mm)

Medium single stud short throw mount. Includes RSMA Mini Elite Projector Mount. For short throw arm only, order WM120S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 34.2" (360 x 185 x 869 mm)

**WM130AUS** EXTENDS UP TO 53" (135 cm)

Large single stud short throw mount. Includes RSMA Mini Elite Projector Mount. For short throw arm only, order WM130S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	N/A	14.2 x 7.3 x 58.2" (36 x 18.5 x 147.9 cm)





## WM SERIES SHORT THROW PROJECTOR MOUNT ACCESSORIES



WMA1S	Compatibility	Weight Capacity
Wall Mount Arm	CMS columns up to 4' (1.2 m)	150 lbs (68 kg) wood/concrete, 50 lbs (22.7 kg) steel stud



WMA2S	Compatibility	Weight Capacity
Wall Mount Arm with Lateral Shift	CMS columns up to 4' (1.2 m)	150 lbs (68 kg) wood/concrete, 75 lbs (34 kg) steel stud



WMAL24	Compatibility
24" (610 mm) Stud Accessory	WM2 Series Wall Mounts



WMAL72	Compatibility
72" (183 cm) Multi-stud Accessory	WM2 Series Wall Mounts



WMAC16	Compatibility
Wall Cover	WM2 Series Wall Mounts





WM2I	Compatibility
Interactive Update Kit	WM2 Series Wall Mounts





WMAH3S	Compatibility
3" (76 mm) Height Adjust Accessory	WM2 Series Wall Mounts

## WP2 SERIES SHORT THROW MOUNT FEATURES

 **PRECISION ADJUSTMENT**  
Integrated micro pitch and lateral shift adjustment to speed up image registration.

 **INTEGRATED CABLE MANAGEMENT**  
Aesthetic covers and internal cable management system conceal and protect cables for a clean finish.

 **VARIABLE EXTENSION OPTION**  
Projector mount slides along arm for infinite projector placement.

 **MULTIPLE INSTALLATION OPTIONS**  
Designed for mounting to concrete, block wall, brick, wood or steel studs. Includes mounting hardware.

### WP21US EXTENDS UP TO 22" (559 mm)



Small economical dual or single stud short throw mount. Includes RPA Mini Projector Mount. For short throw arm only, order WP21S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 24.4" (22 x 48 x 62 cm)



### WP22US EXTENDS UP TO 38" (965 mm)



Medium economical dual or single stud short throw mount. Includes RPA Mini Projector Mount. For short throw arm only, order WP22S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 40.4" (22 x 48 x 103 cm)



### WP23US EXTENDS UP TO 54" (137 cm)



Large economical dual or single stud short throw mount. Includes RPA Mini Projector Mount. For short throw arm only, order WP23S.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	1.75" (44 mm)	8.6 x 19.1 x 56.4" (22 x 48 x 143 cm)



## WP2 SERIES SHORT THROW PROJECTOR MOUNT ACCESSORIES



CMSH3	Compatibility
3" (76 mm) Column Height Adjust Accessory	WP Series Wall Solutions



CMSH3S	Compatibility
3" (76 mm) Column Height Adjust Accessory	WP Series Wall Solutions



# INTERACTIVE SHORT THROW PROJECTOR MOUNTS

## INTERACTIVE SHORT THROW MOUNT FEATURES



### FAST INSTALLATION

Quick-connect system, variable extension and innovative features make mount installation and registration quick and easy.



### EASY INTEGRATION

Simply install the interactive business or education software for Mac or PC, connect the computer and projector and you're ready to go.



### INTERACTIVE STYLUS

Lightweight, ergonomic stylus provides exceptional, real-time rendering capabilities. Includes optional wrist strap.



### FUTURE PROOF

Interactivity in the mount allows you to upgrade your equipment at any time in the future without having to pay for interactive capabilities all over again.



### AWARD-WINNING, FLEXIBLE TECHNOLOGY

Interactive receiver powered by eBeam™ Technology adds interactive functionality to any projection-ready surface and provides a scalable projected image up to 100" (2.54 m) diagonal.

**WM210AUSI** EXTENDS 12.8 - 20" (325 - 508 mm)

Small dual stud short throw mount featuring embedded interactive technology. Includes RSMA Mini Elite® Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 23.1" (293 x 499 x 586 mm)

**WM220AUSI** EXTENDS 18 - 30" (457 - 762 mm)

Medium dual stud short throw mount featuring embedded interactive technology. Includes RSMA Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 35.6" (293 x 499 x 904 mm)

**WM230AUSI** EXTENDS 30 - 55" (76 - 140 cm)

Large dual stud short throw mount featuring embedded interactive technology. Includes RSMA Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 59.6" (29 x 50 x 151 cm)

**WM240AUSI** EXTENDS 37 - 66" (94 - 168 cm)

Extra large dual stud short throw mount featuring embedded interactive technology. Includes RSMA Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
25 lbs (11.3 kg)	±3°	13" (330 mm)	11.5 x 19.6 x 70.4" (29 x 50 x 179 cm)



## INTERACTIVE SHORT THROW PROJECTOR MOUNT ACCESSORIES



WMIUSBB	Compatibility
USB Connector Software	All Chief Interactive Short Throw Mounts



WMIS	Compatibility
Replacement Stylus	All Chief Interactive Short Throw Mounts

# WHITEBOARD MOUNT FOR INTERACTIVE BOARDS

## FEATURES



### RETROFIT DESIGN

Installs directly to the wall over pre-existing whiteboards or chalkboards without causing damage.



### STABLE INSTALLATION

Installs at 2 or 4 anchor points to ensure a stable writing surface.



### DUAL LATERAL SHIFT

Mount shifts left/right at the wall installation. Uprights and interactive board also slide left/right along the mount crossbar.



### PRECISION PLACEMENT

Macro and micro height adjustments provide ease of installation and perfect positioning.

## WBM2 WHITEBOARD MOUNT



Designed for a quick install providing speed and flexibility. The mount anchors on top at two points and rests on board with two adjustable feet.

Weight Capacity	Dimensions (HxWxD)
125 lbs (56.7 kg)	48.8 x 46.9 x 4.9" (124 x 119 x 13 cm)



## WBM2E EXTENDED WHITEBOARD MOUNT



This extended length version of the WBM2 whiteboard mount allows lower placement and anchoring above and below the whiteboard at 4 points.

Weight Capacity	Dimensions (HxWxD)
125 lbs (56.7 kg)	64.8 x 46.9 x 4.9" (164 x 119 x 13 cm)



## WBM3E TELESCOPING WHITEBOARD MOUNT



Legs telescope 5 - 7' (152 - 213 cm) between top and bottom anchor points, allowing you to easily adjust board height for any audience.

Weight Capacity	Dimensions (HxWxD)
125 lbs (56.7 kg)	82.8 x 46.9 x 4.9" (210 x 119 x 13 cm)







## INTEGRATED INTERACTIVE SYSTEM FEATURES



### FULLY INTEGRATED SYSTEM

A unique solution for the Epson® Brightlink® Pro 1410Wi, the Integrated Interactive System combines a high performance projection surface with a precision projector mounting system.



### CUSTOM MOUNT

Features a sleek, custom Chief mount designed to make registration and service extremely fast and easy.



### VERSATILE PROJECTION SCREEN

Da-Lite® IDEA™ Screen serves as a superior image quality projection screen and writeable marker board surface. Offers gain of 2.5 and a 25-degree viewing half angle.



### MULTIPLE FINISH OPTIONS

Choose from one of three different finishes – a deep cherry (W2), sleek aluminum (A1) or beautiful teak (W1).

## AN1 INTEGRATED INTERACTIVE SYSTEM



Includes everything needed to install the Epson® BrightLink® Pro ultra-short throw meeting room projector in corporate environments. Floating board design allows you to route cables behind the board.

Weight Capacity	Screen Diagonal	Overall Dimensions (HxWxD)	Drywall
25 lbs (11.3 kg)	25 degree viewing half angle	63 x 82.9 x 25.6" (160 x 210 x 65 cm)	5/8" (16 mm) or thicker



## INTERACTIVE BOARD MOUNT ACCESSORIES



WBAP	Compatibility
Projector Platform	WBM Series



WBAU	Compatibility
Universal Adapter Kit	WBM Series



WBAE	Compatibility
Extender Kit	WBM Series

## INTEGRATED INTERACTIVE SYSTEM ACCESSORY



AN1CA1	Compatibility
Video Camera Shelf	AN1 Systems



## FIXED TV WALL MOUNTS

### FUSION™ FIXED MOUNT FEATURES



**CONTROLZONE™ LEVELING**  
Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the TV.




**CENTERLESS™ SHIFT**  
Generous post-installation lateral shift allows for perfect display positioning.




**CLICKCONNECT™**  
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.



CONTROLZONE™  
LEVELING



CENTERLESS™ SHIFT



CLICKCONNECT™

**XSMU** 55 - 82" MICRO-ADJUST MOUNT

For extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Stud Compatibility
250 lbs (113.4 kg)	16.5 x 48.4 x 2.3" (419 x 1230 x 57 mm)	200 x 200 - 1230 x 660 mm	23.5" (597 mm)	1" (25 mm)	24 - 48"

**LSMU** 37 - 63" MICRO-ADJUST MOUNT

Our top performing fixed mount fits most displays on the market.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Stud Compatibility
200 lbs (90.7 kg)	16.5 x 34.4 x 2.0" (419 x 875 x 50 mm)	100 x 100 - 879 x 505 mm	17.5" (445 mm)	1" (25 mm)	12 - 34"

**LSAU** 37 - 63" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Stud Compatibility
200 lbs (90.7 kg)	13.2 x 34.4 x 2.0" (335 x 875 x 50 mm)	100 x 100 - 879 x 505 mm	17.5" (445 mm)	N/A	12 - 34"



## MSMU 26 - 47" MICRO-ADJUST MOUNT



The single wall plate can accommodate single or dual stud installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Stud Compatibility
125 lbs (56.7 kg)	16.5 x 25.4 x 2.0" (420 x 646 x 50 mm)	100 x 100 - 650 x 400 mm	14.5" (368 mm)	1" (25 mm)	Single Stud, 16"



## MSAU 26 - 47" WALL MOUNT



This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Stud Compatibility
125 lbs (56.7 kg)	13.5 x 25.4 x 2.0" (343 x 646 x 50 mm)	100 x 100 - 650 x 400 mm	14.5" (368 mm)	N/A	Single Stud, 16"



## FUSION™ FIXED MOUNT ACCESSORIES



FLR100	Weight Capacity	Compatibility
Left/Right Speaker Adapter	20 lbs (9.1 kg)	Fusion Fixed & Tilt Wall Mounts



FCC100	Weight Capacity	Compatibility
Center Channel Speaker Adapter	20 lbs (9.1 kg)	Fusion Landscape Fixed & Tilt Wall Mounts



FCA100	Equipment Depth Range	Compatibility
CAT5/Surge/CPU Adapter	0 - 1.8" (0 - 46 mm)	Fusion Fixed & Tilt Wall Mounts



FCA102	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 1.63" (0 - 41 mm)	Large & Extra Large Fusion Wall Mounts



FCA103	Compatibility
CPU Extender Accessory	All Fusion Wall Mounts



FCA101	Compatibility
Lock-Down Collar	Fusion Fixed & Tilt Wall Mounts



FCK000/008/016	Compatibility
Connector Kits	Fusion Fixed & Tilt Wall Mounts
Model	Width
FCK000	Adds zero length to the poles
FCK008	8" (203 mm)
FCK016	16" (406 mm)



FCS100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	18 x 13.2" (457 x 335 mm)	20 lbs (9.1 kg)	Fusion Landscape Wall Mounts



FCD100	Compatibility
Stackable Component Shelf	Fusion Landscape Wall Mounts



FCA104	Compatibility
Component Shelf Extender	FCS100, FVS100, FVS150, FCC100, FCD100



FVS100/150		Compatibility
Video Conference Camera Shelves - Below		Fusion Landscape Wall Mounts
Model	Dimensions (WxD)	Weight Capacity
FVS100	8 x 13.2" (203 x 335 mm)	10 lbs (4.5 kg)
FVS150	12 x 13.2" (305 x 335 mm)	10 lbs (4.5 kg)



FVS200/250/251	Compatibility	
Video Conference Camera Shelves - Above	Fusion Landscape Wall Mounts	
Model	Dimensions (WxD)	Weight Capacity
FVS200	8 x 71" (203 x 180 mm)	10 lbs (4.5 kg)
FVS250	12 x 71" (305 x 180 mm)	10 lbs (4.5 kg)
FVS251	14 x 71" (356 x 180 mm)	10 lbs (4.5 kg)



FVS300/350	Compatibility	
Video Conference Camera Shelves - Center	Fusion Fixed & Tilt Wall Mounts	
Model	Dimensions (WxD)	Weight Capacity
FVS300	8 x 7" (203 x 178 mm)	10 lbs (4.5 kg)
FVS350	12 x 7" (305 x 178 mm)	10 lbs (4.5 kg)

## FUSION™ FIXED MOUNT ACCESSORIES



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts



## THINSTALL™ FIXED MOUNT

### FEATURES



#### ULTRA-LOW PROFILE

At less than the width of a penny, these mounts provide an ultra-thin profile to showcase any flat-screen display.



#### GLIDE LOCK™

Tool-less latching with a sliding flag for fast installation.




#### CABLE KICKSTAND

A kickstand makes cable access convenient while the open wall plate allows for easy electrical placement behind the display.



GLIDE LOCK™ LATCH



CABLE MANAGEMENT

## LSTU 37 - 63" ULTRA-LOW PROFILE



Thinner than the diameter of a penny, this versatile mount is great for ADA compliance requirements.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
125 lbs (56.7 kg)	24.7 x 35.7 x 0.4" (628 x 907 x 10 mm)	200 x 200 - 800 x 500 mm	16", 20", 24"



## MSTU 26 - 47" ULTRA-LOW PROFILE




Accommodates different mounting patterns than the LSTU and allows for landscape and portrait orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
125 lbs (56.7 kg)	20.9 x 27.8 x 0.4" (530 x 706 x 10 mm)	100 x 100 - 600 x 400 mm	16"



## THININSTALL™ FIXED MOUNT ACCESSORIES



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts

## OTHER FIXED WALL MOUNTS

### PSMH OVER 60" HEAVY DUTY MOUNTS



A heavy-duty series of mounts for extra large flat panels with custom solutions available.

Model	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
PSMH2840	300 lbs (136 kg)	25 x 36.4 x 2.9" (635 x 924 x 74 mm)	400 x 400 - 800 x 400 mm	16", 24"
PSMH2841	275 lbs (124.7 kg)	21 x 19.5 x 1.3" (533 x 495 x 32 mm)	400 x 400 mm	16"

Visit [chiefmfg.com](http://chiefmfg.com) for additional PSMH model specifications.



### RXF2 40 - 63" WALL MOUNT



A very low profile Fit™ solution for extra large displays with wide mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
175 lbs (79.4 kg)	20.5 x 38.0 x 0.8" (521 x 965 x 20 mm)	200 x 100 - 855 x 500 mm	16", 24"



### RLF2 32 - 52" WALL MOUNT



This popular Fit™ mount accommodates most common screens and provides a very low profile installation.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
125 lbs (56.7 kg)	16.5 x 30.8 x 0.8" (419 x 781 x 20 mm)	100 x 100 - 670 x 400 mm	16", 24"



## RMF2 26 - 42" WALL MOUNT



This Fit™ solution is best for displays with smaller mounting patterns and allows for low profile landscape and portrait installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
125 lbs (56.7 kg)	16.5 x 22.0 x 0.8" (419 x 559 x 20 mm)	100 x 100 - 445 x 400 mm	16"



## FSR 10 - 32" WALL MOUNT



A simple wall mount for small displays. The ultra low profile allows for portrait or landscape options with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility
45 lbs (20.4 kg)	7.0 x 6.0 x 0.8" (178 x 152 x 19 mm)	75 x 75 - 200 x 100 mm	Single Stud



## OTHER FIXED WALL MOUNT ACCESSORIES



PACLK1	Compatibility
Cable Lock Accessory	Fit™ Series Fixed Wall Mounts



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts



PAC125/PAC126	Compatibility
Lateral Shift Accessory - 28" (711 mm) / 36" (914 mm)	Chief Fixed & Tilt Wall Mounts



PAC115/116/117	Compatibility
Metal Stud Anchor Kits (Qty 4/8/28)	Fusion™ and Fit Wall Mounts & Thinstall™ Dual Stud Swing Arm Mounts



PX2W	Compatibility
Power Filtering & Surge Protection Accessory	All Chief Wall Mounts



PACPC1	Compatibility
Power Filter Kit	All Chief Mounts



PAC390	Compatibility
Office Furniture Flat Panel Wall Adapter	Chief Fixed & Tilt Wall Mounts



PAC392B	Compatibility
Universal Flat Panel Slat Wall Accessory	Fit Series Fixed & Tilt Wall Mounts

## OTHER FIXED CPU MOUNTS

### PAC260 SERIES DIGITAL MEDIA PLAYER MOUNTS

Ideal for mounting small digital media players, CPUs or video conferencing codecs with mounting options for wall, pole or direct-to-display.

Model	Mounting Option	Weight Capacity	Dimensions (HxWxD)	Max. Equipment Size	Pole Diameter Range
PAC260W	Wall	30 lbs (13.6 kg)	8.96 x 7 x 2.58" (228 x 178 x 66 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A
PAC260P	Pole		8.96 x 7 x 4.16" (228 x 178 x 106 mm)		1.5 - 1.95" (38 - 49 mm)
PAC260D	Direct-to-Display (100 x 100 mm)		8.96 x 7 x 1.76" (228 x 178 x 45 mm)		N/A



### PAC261 SERIES DIGITAL MEDIA PLAYER & POWER BRICK MOUNT

Includes the same mounting options as the PAC260 Series, but each model also includes a power brick mount.

Model	Mounting Option	Weight Capacity	Dimensions (HxWxD)	Max. Equipment Size	Pole Diameter Range
PAC261W	Wall	30 lbs (13.6 kg)	12.07 x 7 x 2.58" (307 x 178 x 66 mm)	10 x 10 x 4" (254 x 254 x 355 mm)	N/A
PAC261P	Pole		12.07 x 7 x 4.16" (307 x 178 x 106 mm)		1.5 - 1.95" (38 - 49 mm)
PAC261D	Direct-to-Display (100 x 100 mm)		12.07 x 7 x 1.76" (307 x 178 x 45 mm)		N/A



### PAC101 COMPONENT WALL SHELF

Provides a fast and simple wall installation for CPUs and other components.

Weight Capacity	Dimensions (HxWxD)	Installation Option	Color
20 lbs (9.1 kg)	2.2 x 14 x 10.4" (55 x 356 x 264 mm)	Single Stud	<b>S</b> <b>B</b>



### FIXED CPU MOUNT ACCESSORY



PAC103	Compatibility
Accessory Shelf Safety Strap	PAC101




## TILT TV WALL MOUNTS

### FUSION™ TILT MOUNT FEATURES




**CONTROLZONE™ LEVELING**  
Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the TV.



CONTROLZONE™  
LEVELING



CENTERLESS™ SHIFT



CENTRIS™ TILT



**CENTERLESS™ SHIFT**  
Generous post-installation lateral shift allows for perfect display positioning.



**CENTRIS™ LOW-PROFILE TILT**  
Uses the center of gravity to balance the screen while maintaining a low profile. The display stays in place until readjusted.



**CLICKCONNECT™**  
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.



**XTMU 55 - 82" MICRO-ADJUST MOUNT**

Works best with extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
250 lbs (113.4 kg)	27 x 48.6 x 2" (68.6 x 123.4 x 5.1 cm)	200 x 200 - 1250 x 660 mm	23.5" (597 mm)	1" (25 mm)	-12°

**LTMU 37 - 63" MICRO-ADJUST MOUNT**

Our top performing tilt mount fits most displays on the market.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
200 lbs (90.7 kg)	21 x 34.6 x 2" (533 x 879 x 51 mm)	100 x 100 - 895 x 505 mm	17.5" (445 mm)	1" (25 mm)	-12°

**LTMPU 37 - 63" PORTRAIT/MICRO-ADJUST MOUNT**

The portrait version of the popular LTMU.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
200 lbs (90.7 kg)	34.4 x 22.6 x 2" (874 x 574 x 51 mm)	200 x 200 - 800 x 525 mm	11.5" (292 mm)	1" (25 mm)	-11°

**LTAU 37 - 63" WALL MOUNT**

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
200 lbs (90.7 kg)	21 x 34.6 x 2" (533 x 879 x 51 mm)	100 x 100 - 895 x 505 mm	17.5" (445 mm)	N/A	-12°



## MTMU 26 - 47" MICRO-ADJUST MOUNT



The single wall plate can accommodate single or dual stud installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
125 lbs (56.7 kg)	16.5 x 25.6 x 2" (419 x 650 x 51 mm)	100 x 100 - 667 x 400 mm	14.5" (368 mm)	1" (25 mm)	-12°



## MTMPU 26 - 47" PORTRAIT/MICRO-ADJUST MOUNT



The portrait version of the popular MTMU.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
125 lbs (56.7 kg)	24.5 x 18.6 x 2" (622 x 472 x 51 mm)	100 x 100 - 600 x 460 mm	8.5" (216 mm)	1" (25 mm)	+3°, -10°



## MTAU 26 - 47" WALL MOUNT



This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display needs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Height Adjust	Tilt
125 lbs (56.7 kg)	16.5 x 25.6 x 2" (419 x 650 x 51 mm)	100 x 100 - 673 x 400 mm	14.5" (368 mm)	N/A	-12°



## FUSION™ TILT MOUNT ACCESSORIES



FLR100	Weight Capacity	Compatibility
Left/Right Speaker Adapter	20 lbs (9.1 kg)	Fusion Fixed & Tilt Wall Mounts



FCC100	Weight Capacity	Compatibility
Center Channel Speaker Adapter	20 lbs (9.1 kg)	Fusion Landscape Fixed & Tilt Wall Mounts



FCA100	Equipment Depth Range	Compatibility
CAT5/Surge/CPU Adapter	0 - 1.8" (0 - 46 mm)	Fusion Fixed & Tilt Wall Mounts



FCA102	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 1.63" (0 - 41 mm)	Large & Extra Large Fusion Wall Mounts



FCA103	Compatibility
CPU Extender Accessory	All Fusion Wall Mounts



FCA101	Compatibility
Lock-Down Collar	Fusion Fixed & Tilt Wall Mounts



FCK000/008/016	Compatibility
Connector Kits	Fusion Fixed & Tilt Wall Mounts
Model	Width
FCK000	Adds zero length to the poles
FCK008	8" (203 mm)
FCK016	16" (406 mm)



FCS100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	18 x 13.2" (457 x 335 mm)	20 lbs (9.1 kg)	Fusion Landscape Wall Mounts



FCD100	Compatibility
Stackable Component Shelf	Fusion Landscape Wall Mounts



FCA104	Compatibility
Component Shelf Extender	FCS100, FVS100, FVS150, FCC100, FCD100



FVS100/150		Compatibility
Video Conference Camera Shelves - Below		Fusion Landscape Wall Mounts
Model	Dimensions (WxD)	Weight Capacity
FVS100	8 x 13.2" (203 x 335 mm)	10 lbs (4.5 kg)
FVS150	12 x 13.2" (305 x 335 mm)	10 lbs (4.5 kg)



FVS200/250/251	Compatibility	
Video Conference Camera Shelves - Above	Fusion Landscape Wall Mounts	
Model	Dimensions (WxD)	Weight Capacity
FVS200	8 x 71" (203 x 180 mm)	10 lbs (4.5 kg)
FVS250	12 x 71" (305 x 180 mm)	10 lbs (4.5 kg)
FVS251	14 x 71" (356 x 180 mm)	10 lbs (4.5 kg)



FVS300/350	Compatibility	
Video Conference Camera Shelves - Center	Fusion Fixed & Tilt Wall Mounts	
Model	Dimensions (WxD)	Weight Capacity
FVS300	8 x 7" (203 x 178 mm)	10 lbs (4.5 kg)
FVS350	12 x 7" (305 x 178 mm)	10 lbs (4.5 kg)

## FUSION™ TILT MOUNT ACCESSORIES



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts

## THINSTALL™ TILT MOUNT

### FEATURES



#### ULTRA-LOW PROFILE

These mounts provide an ultra-thin profile to showcase any flat-screen display.



#### GLIDE LOCK™

Tool-less latching with a sliding flag for fast installation.




#### CENTRIS LOW-PROFILE TILT

Uses the center of gravity to balance the screen while maintaining a low profile. The display stays set in place until readjusted.




#### CABLE KICKSTAND

A kickstand makes cable access hands-free while the open wall plate allows for easy electrical placement behind the display.



GLIDE LOCK™ LATCH



CABLE MANAGEMENT

## LTTU 37 - 63" ULTRA-LOW PROFILE



At less than 1" (25 mm) thick, this mount works well for ADA requirements, and it still offers 12 degrees of tilt.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Screen Thickness	Tilt
100 lbs (45.4 kg)	21.6 x 35.7 x 0.8" (548 x 907 x 19 mm)	200 x 200 - 800 x 500 mm	2" (51 mm)	-12°



## MTTU 26 - 47" ULTRA-LOW PROFILE



Like the LTTU but it allows for different mounting patterns and both landscape and portrait screen orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Screen Thickness	Tilt
100 lbs (45.4 kg)	17.6 x 27.8 x 0.8" (448 x 706 x 19 mm)	100 x 100 - 600 x 400 mm	2" (51 mm)	-12°



## THINSTALL™ TILT MOUNT ACCESSORIES



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts

## OTHER TILT WALL MOUNTS

### RXT2 40 - 63" WALL MOUNT



This Fit™ solution works best with extra large displays that have wide mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility	Tilt
175 lbs (79.4 kg)	20.5 x 38 x 2" (521 x 965 x 50 mm)	200 x 200 - 910 x 500 mm	16", 24"	-12°



### RLT2 32 - 52" WALL MOUNT



This popular Fit™ mount accommodates most common screens.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility	Tilt
125 lbs (56.7 kg)	16.5 x 30.8 x 2" (419 x 781 x 50 mm)	100 x 100 - 723 x 400 mm	16", 24"	-12°



### PWC 42 - 71" MOUNT WITH CPU STORAGE



An all-in-one solution that provides CPU storage and a tilt mount – ideal for digital signage applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Equipment Size (HxWxD)	Tilt
125 lbs (56.7 kg)	17.3 x 19.2 x 4.5" (439 x 488 x 114 mm)	200 x 200 - 862 x 517 mm	20 x 18.79 x 3.79" (508 x 477 x 96 mm)	-15°





**RMT2** 26 - 42" WALL MOUNT

Best Fit™ solution for displays with smaller mounting patterns and allows for low profile landscape and portrait installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility	Tilt
125 lbs (56.7 kg)	16.5 x 22 x 2" (419 x 559 x 50 mm)	100 x 100 - 506 x 400 mm	16"	-12°

**MWC** 26 - 55" MOUNT WITH CPU STORAGE

Accommodates smaller mounting patterns than the PWC.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Equip. Size (HxWxD)	Tilt
100 lbs (45.4 kg)	11.9 x 19.2 x 4.5" (303 x 487 x 114 mm)	100 x 100 - 709 x 431 mm	14 x 18.8 x 3.8" (356 x 478 x 97 mm)	-15°

**FTR** 10 - 32" WALL MOUNT

A small option for flat panel TVs or monitors that allows for portrait or landscape options with Q-Latch™ mounting system.


Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Stud Compatibility	Tilt
45 lbs (20.4 kg)	5.6 x 5.6 x 2" (142 x 142 x 51 mm)	75 x 75 - 200 x 100 mm	Single Stud	+5°, -15°



## OTHER TILT WALL MOUNT ACCESSORIES



PACLK1	Compatibility	
Cable Lock Accessory	Fit™ Series Fixed Wall Mounts	



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts



PAC125/PAC126	Compatibility
Lateral Shift Accessory - 28" (711 mm) / 36" (914 mm)	Chief Fixed & Tilt Wall Mounts



PAC115/116/117	Compatibility
Metal Stud Anchor Kits (Qty 4/8/28)	Fusion™ and Fit Wall Mounts & Thinstall™ Dual Stud Swing Arm Mounts



PX2W	Compatibility
Power Filtering & Surge Protection Accessory	All Chief Wall Mounts



PACPC1	Compatibility
Power Filter Kit	All Chief Mounts



PAC390	Compatibility
Office Furniture Flat Panel Wall Adapter	Chief Fixed & Tilt Wall Mounts



PAC392B	Compatibility
Universal Flat Panel Slat Wall Accessory	Fit Series Fixed & Tilt Wall Mounts

# VIDEO WALL TV WALL MOUNTS

## CONNEXSYS™ VIDEO WALL SYSTEM FEATURES



### SPEED LEVELING

Mount multiple units to a single strut channel for quick row leveling and centerless lateral shift.



### POWERZONE™ ADJUSTMENTS

Six points of tool-free adjustment: height, depth, lateral and tilt are all found in one easy-to-access location. Rigid frame keeps displays where you set them even after extending for service.



### RAPIDDRAW™ DISPLAY RELEASE

Cord release system gently and remotely pops any screen out 13.7" (348.6 mm) from the wall for easy access and service while minimizing aggressive screen pushes. Get an additional 20 degrees of bottom pull-out with an integrated kickstand. Cords can be set to release from any 90 degree angle.




### GENEROUS DEPTH ADJUSTMENT

Mount depth from wall can be set between 4" and 7.3" (102 and 186 mm) for perfect alignment, accommodating for recess applications and wall imperfections.

**LVS1U** 42 - 80" LANDSCAPE SYSTEM WITH RAILS

This universal pop-out mount is ideal for large-scale, seamless video walls and recessed applications. Ships with rails for each mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
150 lbs (68 kg)	21.8 x 35.5 x 4" (554 x 903 x 102 mm)	200 x 100 - 700 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)

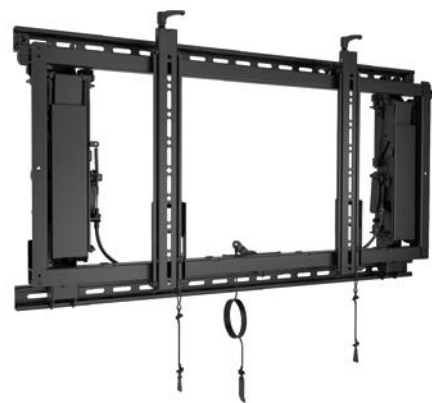**LVS1UP** 40 - 80" PORTRAIT SYSTEM WITH RAILS

The portrait version of the LVS1U that ships with rails for each mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
150 lbs (68 kg)	32.5 x 19.5 x 4.1" (826 x 496 x 104 mm)	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)

**LVSXU** 42 - 80" LANDSCAPE SYSTEM WITHOUT RAILS

Nearly identical to the LVS1U but ships without rails so installers can source strut locally to hang multiple mounts to one rail and reduce installation time.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
150 lbs (68 kg)	21.8 x 35.5 x 4" (554 x 903 x 102 mm)	200 x 100 - 700 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)

**LVSXUP** 40 - 80" PORTRAIT SYSTEM WITHOUT RAILS

The portrait version of the LVSXU that also ships without rails.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
150 lbs (68 kg)	32.5 x 19.5 x 4.1" (826 x 496 x 104 mm)	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 1" (25 mm)	3.33" (85 mm)



## FUSION™ VIDEO WALL FEATURES



### PULL-OUT EXTENSION

Mounts extend 7" (178 mm) for easy cable access and servicing in hard-to-reach installations.



### CONTROLZONE LEVELING

Post-installation fine-tuning of height and leveling ensures screens will be perfectly aligned.




### CENTERLESS SHIFT

Generous post-installation lateral shift allows screens to slide apart or together for easy maintenance and perfect alignment.




### CLICKCONNECT™

Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.



CONTROLZONE™




CENTERLESS™ SHIFT

## LSMVU 37 - 63" PULL-OUT WALL MOUNT



Chief's micro-adjustable pull-out mount fits most displays to create seamless video walls.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Extension	Plumb Adjustment
150 lbs (68 kg)	21.0 x 34.6 x 3.7" (533 x 879 x 94 mm)	200 x 200 - 760 x 505 mm	17.5" (445 mm)	10.7" (272 mm)	2.5°

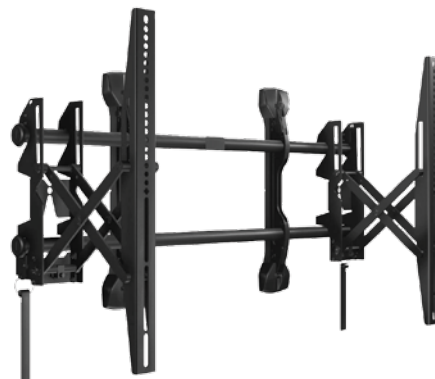

## LSMVPVU PORTRAIT PULL-OUT WALL MOUNT



The portrait version of the popular LSMVU for 37 - 63" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Extension	Plumb Adjustment
150 lbs (68 kg)	32.5 x 20.6 x 3.7" (826 x 523 x 94 mm)	200 x 200 - 800 x 400 mm	4" (102 mm)	10.7" (272 mm)	2.5°




## MSMVU 26 - 47" PULL-OUT WALL MOUNT



The smaller version of the LSMVU for shorter and/or narrower mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Extension	Plumb Adjustment
125 lbs (56.7 kg)	16.5 x 25.5 x 3.7" (419 x 648 x 94 mm)	100 x 100 - 540 x 400 mm	14.5" (368 mm)	10.7" (272 mm)	2.5°

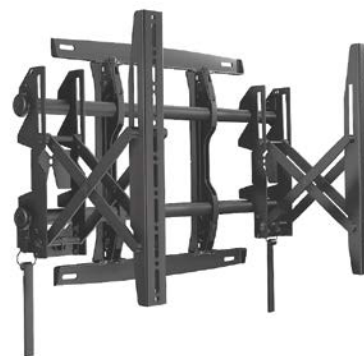

## MSMVPU PORTRAIT PULL-OUT WALL MOUNT



The portrait version of the popular MSMVU for 26 - 47" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Lateral Shift	Extension	Plumb Adjustment
125 lbs (56.7 kg)	24.4 x 20.6 x 3.7" (620 x 523 x 94 mm)	100 x 100 - 600 x 400 mm	10" (254 mm)	10.7" (272 mm)	2.5°



## FUSION™ VIDEO WALL MOUNT ACCESSORIES



FCA100	Equipment Depth Range	Compatibility
CAT5/Surge/CPU Adapter	0 - 1.8" (0 - 46 mm)	Fusion Wall Mounts



FCA102	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 1.63" (0 - 41 mm)	Large & Extra Large Fusion Wall Mounts



FCA101	Compatibility
Lock-Down Collar	Fusion Wall Mounts



FCS100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	18 x 13.2" (457 x 335 mm)	20 lbs (9.1 kg)	Fusion Landscape Wall Mounts



FCD100	Compatibility
Stackable Component Shelf	Fusion Landscape Wall Mounts



FCA104	Compatibility
Component Shelf Extender	FCS100, FVS100, FVS150, FCC100, FCD100



FVS100/150		Compatibility
Video Conference Camera Shelves - Below		Fusion Landscape Wall Mounts
Model	Dimensions (WxD)	Weight Capacity
FVS100	8 x 13.2" (203 x 335 mm)	10 lbs (4.5 kg)
FVS150	12 x 13.2" (305 x 335 mm)	10 lbs (4.5 kg)



FVS200/250/251	Compatibility	
Video Conference Camera Shelves - Above	Fusion Landscape Wall Mounts	
Model	Dimensions (WxD)	Weight Capacity
FVS200	8 x 7.1" (203 x 180 mm)	10 lbs (4.5 kg)
FVS250	12 x 7.1" (305 x 180 mm)	10 lbs (4.5 kg)
FVS251	14 x 7.1" (356 x 180 mm)	10 lbs (4.5 kg)





# SWING ARM TV WALL MOUNTS

## THINSTALL™ SWING ARM FEATURES



### ULTRA-LOW PROFILE

These sleek designs retract down to 1.5 to 1.8" (38 to 46 mm) to provide an ultra-thin profile to showcase any flat-screen display.



### CENTERLESS™ SHIFT

Generous post-installation lateral shift up to 16" (406 mm) allows for perfect display positioning.



### CABLE MANAGEMENT

Enclosed, tool-less cable covers and a wide open wall plate make it easy to route power and signal cables.



### CENTRIS™ FINGERTIP TILT

Uses the center of gravity to balance the screen for up to 15 degrees of easy tilt capability.



### HEIGHT ADJUST

Adjust the height of the entire configuration post installation up to 1" (25 mm).

## TS525TU 37 - 58" EXTENDS 25" (635 mm)



This feature-rich swing arm fits most screens and has a large array of supporting accessories.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
125 lbs (56.7 kg)	20.7 x 29.5 x 1.5" (527 x 749 x 38 mm)	100 x 100 - 800 x 400 mm	25" (635 mm)	16" (406 mm)	-15°	1" (25 mm)



## TS325TU 26 - 52" EXTENDS 25" (635 mm)



Very similar to the TS525TU but with a shorter wall plate and modified interface making it better suited for lighter displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
75 lbs (34 kg)	17.3 x 22.6 x 1.8" (439 x 574 x 46 mm)	100 x 100 - 600 x 400 mm	25" (635 mm)	16" (406 mm)	-15°	1" (25 mm)



## TS318TU 26 - 52" EXTENDS 18" (457 mm)



This mount has the same features as the TS325TU with 18" (462 mm) extension.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
75 lbs (34 kg)	17.3 x 22.6 x 1.8" (439 x 574 x 46 mm)	100 x 100 - 600 x 400 mm	18" (457 mm)	16" (406 mm)	-15°	1" (25 mm)



## TS318SU 26 - 52" EXTENDS 18" (457 mm)



This single stud version of the TS318 dual arm swing arm mount works well when lateral shift is not a necessity.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
75 lbs (34 kg)	13.5 x 22.6 x 1.8" (343 x 574 x 46 mm)	100 x 100 - 600 x 400 mm	18" (457 mm)	N/A	-15°	1" (25 mm)



**TS218SU** 26 - 47" EXTENDS 18" (457 mm)

This single stud swing arm works well in corners and with most medium flat panels. It also accommodates portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
75 lbs (34 kg)	14 x 13 x 1.5" (356 x 330 x 38 mm)	100 x 100 - 400 x 400 mm	18" (457 mm)	N/A	-12°	1" (25 mm)

**TS118SU** 10 - 32" EXTENDS 18" (457 mm)

Fits smaller patterns and screens than the TS218SU.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
35 lbs (15.9 kg)	11.6 x 13 x 1.5" (294 x 330 x 38 mm)	75 x 75 - 200 x 200 mm	18" (457 mm)	N/A	-12°	N/A

**TS110SU** 10 - 32" EXTENDS 9.85" (250 mm)

This basic swing arm wall mount provides single arm extension and swivel for smaller displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Height Adjust
35 lbs (15.9 kg)	9.4 x 14 x 1.5" (239 x 356 x 38 mm)	75 x 75 - 200 x 200 mm	9.85" (250 mm)	N/A	-12°	N/A



# THINSTALL™ SWING ARM ACCESSORIES



TA100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	18 x 12" (457 x 305 mm)	10 lbs (4.5 kg)	TS525TU, TS325TU, TS318TU, TS318SU



TA200/250		Compatibility	
Video Conference Camera Shelves - Above		TS525TU, TS325TU, TS318TU, TS318SU	
Model	Dimensions (WxD)	Weight Capacity	
TA200	8 x 7.3" (203 x 184 mm)	10 lbs (4.5 kg)	
TA250	12 x 7.3" (305 x 184 mm)	10 lbs (4.5 kg)	



TA300	Weight Capacity	Compatibility
Left/Right Speaker Adapter	10 lbs (4.5 kg)	TS525TU, TS325TU, TS318TU, TS318SU



TA350	Weight Capacity	Compatibility
Center Channel Speaker Adapter	10 lbs (4.5 kg)	TS525TU, TS325TU, TS318TU, TS318SU



TA410	Compatibility
Portrait Adapter	TS525TU, TS325TU, TS318TU, TS318SU




TA500	Dimensions (HxWxD)	Compatibility
Large In-Wall Swing Arm Accessory	21.75 x 34 x 3.96" (553 x 864 x 101 mm)	TS525TU, TS325TU



TA501	Dimensions (HxWxD)	Compatibility
Medium In-Wall Swing Arm Accessory	20 x 30 x 3.96" (508 x 762 x 101 mm)	TS318TU



TA502	Dimensions (HxWxD)	Compatibility
Small In-Wall Swing Arm Accessory	17.2 x 14.25 x 3.96" (437 x 362 x 101 mm)	TS218SU, TS118SU



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts



## AUTOMATED SWING ARM FEATURES



### CONTROL OPTIONS

Comes with a programmable IR remote control or use RS485 protocol (AMX™/Crestron™ compatible).




### PRESET POSITIONS

Program four preset positions for fast adjustment of tilt, swivel and extension.



### CABLE MANAGEMENT

Cabletrac™ system provides cable management channels for quick and easy routing.



CONTROL OPTIONS

## PXRU 37 - 65" AUTOMATED WALL MOUNT



This fully automated swing arm comes with programmable IR/RS485 serial control options.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Color
150 lbs (68 kg)	19.2 x 27.6 x 4.5" (488 x 701 x 114 mm)	200 x 100 - 700 x 450 mm	27" (686 mm)	N/A	-12°	B





# OTHER SWING ARM MOUNTS

## PDR 42 - 71" EXTENDS 37" (940 mm)



The heavy-duty swing arm option works for displays up to 200 lbs (90.7 kg) and boasts the most extension capabilities at 37" (940 mm).

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Color
200 lbs (90.7 kg)	22 x 39.5 x 3.4" (55.9 x 100.3 x 8.6 cm)	200 x 200 - 862 x 517 mm	37" (940 mm)	9" (229 mm)	+5°, -16°	<b>S</b> <b>B</b>



## PNR 42 - 71" EXTENDS 25" (635 mm)



The smaller version of the PDR extends to 25" (635 mm).

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Extension	Max. Lateral Shift	Tilt	Color
200 lbs (90.7 kg)	22 x 27.6 x 3.3" (559 x 701 x 84 mm)	200 x 200 - 862 x 517 mm	25" (635 mm)	9" (229 mm)	+5°, -17°	<b>S</b> <b>B</b>



# SWING ARM MOUNT

## ACCESSORIES



PACLR1/PACLR2	Weight Capacity	Compatibility
Left/Right Speaker Adapters	25 lbs (11.3 kg)	PDR, PNR & Other Q-Latch™ Mounts



PACCC1/PACCC2	Weight Capacity	Compatibility
Center Channel Speaker Adapters	35 lbs (15.9 kg)	PDR, PNR & Other Q-Latch Mounts



PACCCS1	Weight Capacity	Compatibility
Large Accessory Shelf	15 lbs (6.8 kg)	PDR, PNR & Other Q-Latch Mounts



PAC715/PAC716	Compatibility	
Video Conference Camera Shelves - Above or Below	PDR, PNR & Other Q-Latch Mounts	
Model	Dimensions (WxD)	Weight Capacity
PAC715	9 x 8.8" (229 x 223 mm)	10 lbs (4.5 kg)
PAC716	14 x 7.9" (356 x 201 mm)	10 lbs (4.5 kg)



PAC251/252/253	Compatibility	
P-Series CPU/DVD/Media Player Adapters	PDR, PNR & Other Q-Latch Mounts	
Model	Max. Equipment Size (HxWxD)	
PAC251	17.63 x 15.5 x 3.5" (448 x 394 x 89 mm)	
PAC252	16 x 14.5 x 4.5" (406 x 386 x 114 mm)	
PAC253	20 x 15.75 x 1.81" (508 x 400 x 46 mm)	



PAC400	Compatibility	
P-Series Rotation Adapter	PDR, PNR & Other Q-Latch Mounts	



PAC525FC	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	9 x 14.25 x 3.9" (229 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC526FC	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	14.25 x 14.25 x 3.9" (362 x 362 x 99 mm)	All Chief Wall Mounts; Standard & 2.5" (64 mm) depth studs



PAC511	Dimensions (HxWxD)	Compatibility
Retrofit Pre-Wire In-Wall Box	18.4 x 16.9 x 3.4" (467 x 419 x 87 mm)	All Chief Wall Mounts



PAC516	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	15.5 x 14.5 x 3.5" (394 x 368 x 89 mm)	All Chief Wall Mounts



PAC522	Dimensions (HxWxD)	Compatibility
Pre-Wire In-Wall Box	7.8 x 14.5 x 3.5" (197 x 368 x 89 mm)	All Chief Wall Mounts



PAC521P	Dimensions (HxWxD)	Compatibility
In-Wall Box with Power Outlet Conditioner	11.5 x 7.4 x 3.8" (292 x 188 x 97 mm)	All Chief Wall Mounts



PX2W	Compatibility	
Power Filtering & Surge Protection Accessory	All Chief Wall Mounts	



PACPC1	Compatibility	
Power Filter Kit	All Chief Mounts	



PAC124	Compatibility	
Swing Arm 24" (610 mm) Stud Adapter	PDR, PNR	
Model	Color	
PAC124B	B	
PAC124S	S	



PAC502B	Dimensions (HxWxD)	Compatibility
PXR In-Wall Accessory	20 x 30 x 3.9" (508 x 762 x 98 mm)	PXR



PACHFK2	Compatibility	
PXR In-Wall Header/Footer Kit	PXR	





## CEILING TV MOUNTS

### FUSION™ VIDEO WALL FEATURES



#### CONTROLZONE™ LEVELING

Allows for 2" (51 mm) of height adjustment at each mounting box plus 1" (25 mm) increments along each column.



#### INDEPENDENT ADJUSTMENT

Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.



#### INFINITE SCREEN POSITIONING

Infinite vertical and lateral shift adjustments allow for tight display rows and columns.



#### CABLE MANAGEMENT

FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.



#### 60" OPTION

FCAX accessories increase rail length for larger displays, up to 60" (152 cm).



INDEPENDENT ADJUSTMENT



INFINITE SCREEN POSITIONING


## LCM3X3U LANDSCAPE VIDEO WALL



The landscape 3 wide x 3 tall configuration can be combined with other ceiling mounts to create longer walls. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Manual Height Adjust	Micro Height Adjust*
85 lbs (38.5 kg)	78.6 x 108.8 x 14.5" (199.6 x 276.3 x 36.8 cm)	Any width x 100 - 400 mm	1" (25 mm)	2" (51 mm)

\* Micro Height Adjustments can be made at each column intersection.

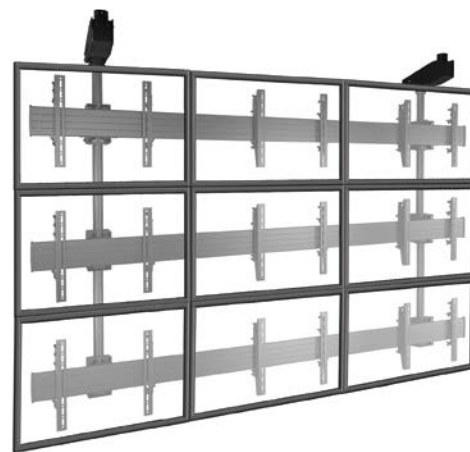


## LCM3X2U LANDSCAPE VIDEO WALL



Create video walls in landscape orientation 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Manual Height Adjust	Micro Height Adjust*
125 lbs (56.7 kg)	54.7 x 108.9 x 14.5" (138.9 x 276.6 x 36.8 cm)	Any width x 100 - 400 mm	1" (25 mm)	2" (51 mm)

\* Micro Height Adjustments can be made at each column intersection.

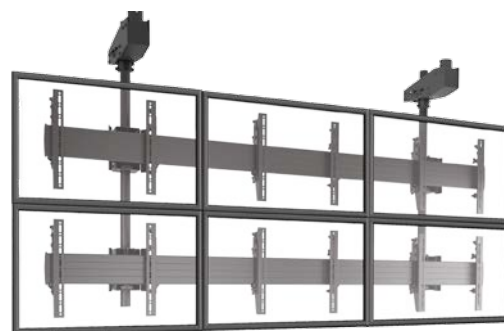

## LCM3X2UP PORTRAIT VIDEO WALL



A portrait version to mount video walls 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Manual Height Adjust	Micro Height Adjust*
125 lbs (56.7 kg)	78.6 x 68.8 x 14.5" (199.6 x 174.8 x 36.8 cm)	up to 800 mm x 100 - 400 mm	1" (25 mm)	2" (51 mm)

\* Micro Height Adjustments can be made at each column intersection.




## LCM2X2U LANDSCAPE VIDEO WALL



The versatile and popular landscape 2 wide x 2 tall configuration fits well in most digital signage applications. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Manual Height Adjust	Micro Height Adjust*
125 lbs (56.7 kg)	54.7 x 72.9 x 14.5" (138.9 x 185.1 x 36.8 cm)	Any width x 100 - 400 mm	1" (25 mm)	2" (51 mm)

\* Micro Height Adjustments can be made at each column intersection.

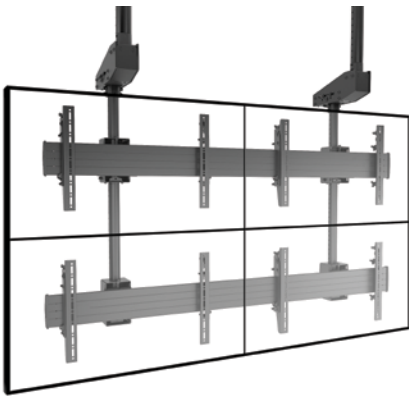

## LCM2X2UP PORTRAIT VIDEO WALL



A portrait version to mount video walls 2 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Manual Height Adjust	Micro Height Adjust*
125 lbs (56.7 kg)	78.6 x 46.8 x 14.5" (199.6 x 118.9 x 36.8 cm)	up to 800 mm x 100 - 400 mm	1" (25 mm)	2" (51 mm)

\* Micro Height Adjustments can be made at each column intersection.



## FUSION™ MENU BOARD

### FEATURES



**CONTROLZONE™ LEVELING**  
Allows for 2" (51 mm) of height adjustment at each mounting box.



**CENTRIS™ TILT TECHNOLOGY**  
Screens stay where you place them for effortless multi-screen alignment.



**TOOL-FREE SCREEN ENGAGEMENT**  
Easily place screens and add optional padlock security.




**LATERAL SHIFT**  
Post-installation lateral shift allows screens to slide apart or together for easy maintenance and perfect alignment.



**ADD EXTENSION**  
FCAX accessories increase rail length for larger displays, up to 60" (152 cm).



CONTROLZONE  
LEVELING




CENTRIS TILT  
TECHNOLOGY

## LCM3X1U LANDSCAPE MENU BOARD



This classic menu board configuration is three screens across. Create longer menu boards by combining mounts. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Tilt
125 lbs (56.7 kg)	16.75 X 108.9 X 7.9" (42.5 x 276.6 x 20.1 cm)	Any width x 100 - 400 mm	2" (51 mm)	+5°, -20°

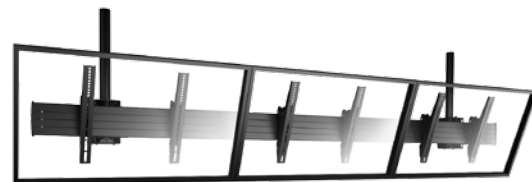


## LCM3X1UP PORTRAIT MENU BOARD



The portrait of the LCM3X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Tilt
125 lbs (56.7 kg)	32.5 X 68.9 X 7.9" (82.6 x 175 x 20.1 cm)	up to 800 mm x 100 - 800 mm	2" (51 mm)	+5°, -20°

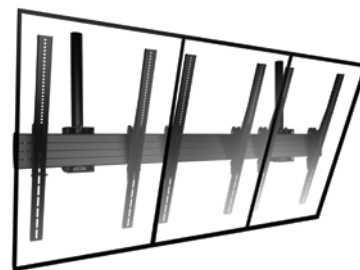


### LCB3X1U BACK-TO-BACK LANDSCAPE



Mount three screens back-to-back in landscape orientation for six total screens. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Max Tilt*
125 lbs (56.7 kg)	16.75 x 108.8 x 11.5" (42.5 x 276.3 x 29.2 cm)	Any width x 100 - 400 mm	2" (51 mm)	+5°, -20°

\* Varies with display size.

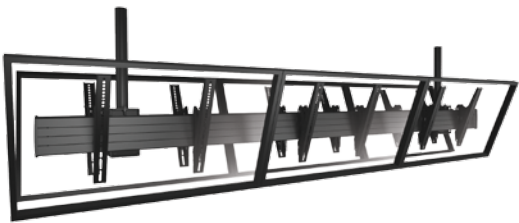


### LCB3X1UP BACK-TO-BACK PORTRAIT



The portrait version of the LCB3X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Max Tilt*
125 lbs (56.7 kg)	32.5 x 68.8 x 11.5" (82.6 x 174.8 x 29.2 cm)	Any width x 100 - 800 mm	2" (51 mm)	+5°, -20°

\* Varies with display size.

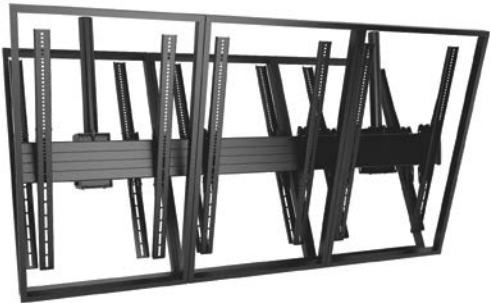

### LCM2X1U LANDSCAPE MENU BOARD



This classic menu board configuration is two screens across. Create longer menu boards by combining mounts. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Tilt
125 lbs (56.7 kg)	16.8 x 72.9 x 7.9" (42.7 x 185.1 x 20.1 cm)	Any width x 100 - 400 mm	N/A	+5°, -20°






## LCM2X1UP PORTRAIT MENU BOARD



The portrait version of the LCM2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Tilt
125 lbs (56.7 kg)	32.5 X 46.86 X 7.9" (82.6 x 119 x 20.1 cm)	Any width x 100 - 800 mm	N/A	+5°, -20°

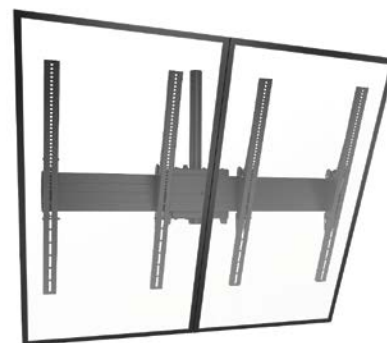


## LCB2X1U BACK-TO-BACK LANDSCAPE



Mount two screens back-to-back in landscape orientation for four total screens. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Max Tilt*
100 lbs (45.3 kg)	16.75 X 72.86 X 11.64" (42.5 x 185.1 x 29.6 cm)	Any width x 100 - 400 mm	N/A	+5°, -20°

\* Varies with display size.

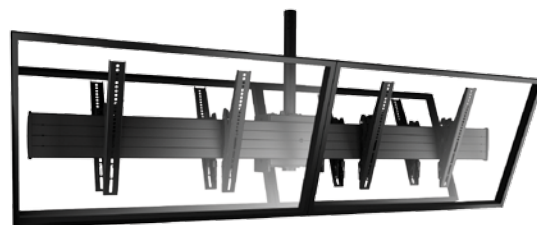

## LCB2X1UP BACK-TO-BACK PORTRAIT



The portrait version of the LCB2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Micro Height Adjust	Max Tilt*
100 lbs (45.3 kg)	32.5 X 46.86 X 11.64" (82.6 x 119 x 29.6 cm)	Any width x 100 - 800 mm	N/A	+5°, -20°

\* Varies with display size.



## FUSION™ CEILING MOUNTS

### FEATURES



#### CENTRIS TILT TECHNOLOGY

Provides a continuous range of fingertip tilt from +5 to -20 degrees with four set locking points at 0, 5, 10 and 15 degrees to eliminate guess work when adjusting multiple screens.



#### ON/OFF COLUMN CONNECTION

Simple connection for ease of installation and service, particularly when installing in tight corners or near walls.



#### TOOL-FREE SCREEN ENGAGEMENT

Easily place screens and add optional padlock security.



#### FLEXIBILITY

Mount swivels to any preferred viewing angle before locking down with set screws.

### XCM7000 60 - 90" HEAVY-DUTY MOUNT



Dual pole drop provides needed support for single extra large and deep flat panel displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt*	Roll Adjust
300 lbs (136 kg)	16.75 X 34.8 X 8" (425 x 884 x 203 mm)	200 x 100 - 800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

\*Tilt for 7000 series ceiling mounts is only adjustable in 5 degree increments.



### XCB7000 60 - 90" BACK-TO-BACK HEAVY-DUTY MOUNT



Dual pole drop provides needed support for back-to-back configurations of extra large and deep flat panel displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt*	Roll Adjust
300 lbs (136 kg)	16.75 X 34.8 X 11.8" (425 x 884 x 300 mm)	200 x 100 - 800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

\*Tilt for 7000 series ceiling mounts is only adjustable in 5 degree increments.






**XCM1U** 60 - 90" LANDSCAPE CEILING MOUNT


For heavier displays with wider mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust
250 lbs (113.4 kg)	16.75 x 34.8 x 7.9" (425 x 884 x 201 mm)	200 x 100 - 800 x 400 mm	+5°, -20°	±3°

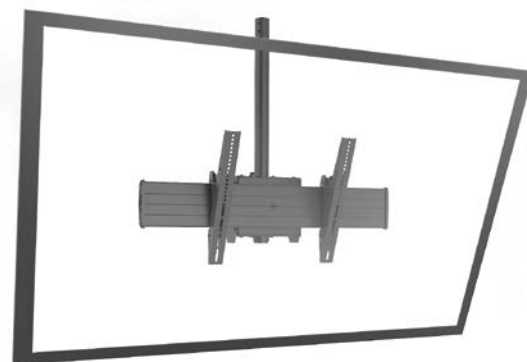**XCB1U** 60 - 90" BACK-TO-BACK LANDSCAPE MOUNT

Back-to-back version of the XCM1U to mount two displays with wider mounting patterns.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust
200 lbs (90.7 kg)	16.75 x 34.8 x 11.64" (425 x 884 x 296 mm)	200 x 100 - 800 x 400 mm	+5°, -20° for screens up to 38.8" (986 mm) tall	±3°

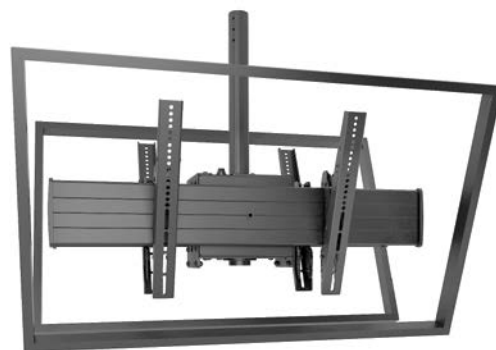**LCM1U** 32 - 60" LANDSCAPE CEILING MOUNT

Our most popular, feature-packed and versatile single ceiling mount. Add another for stacked configurations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 26.8 x 6.4" (420 x 681 x 162 mm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>S</b> <b>B</b>




### LCM1UP 32 - 60" PORTRAIT CEILING MOUNT



The portrait version of the LCM1U.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	32.5 X 20.84 X 6.37" (826 x 529 x 162 mm)	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	<b>S</b> <b>B</b>

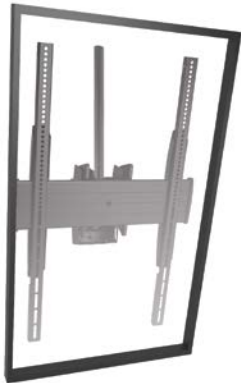


### LCB1U 32 - 60" BACK-TO-BACK LANDSCAPE MOUNT



The back-to-back version of the LCM1U for two total screens in a landscape configuration.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 26.8 x 10.2" (420 x 681 x 259 mm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

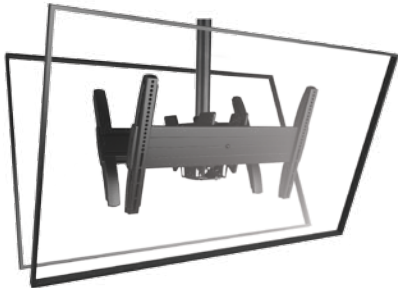

### LCB1UP 32 - 60" BACK-TO-BACK PORTRAIT MOUNT



The portrait version of the LCB1U.


Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	32.5 x 20.8 x 10.2" (826 x 529 x 259 mm)	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	<b>B</b>



**LCM1X2U** 32 - 60" STACKED LANDSCAPE


This solution includes two LCM1U mounts and a 48" (121.9 cm) perforated CPA column for stacking two screens on the same column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 26.8 x 6.4" (420 x 681 x 162 mm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

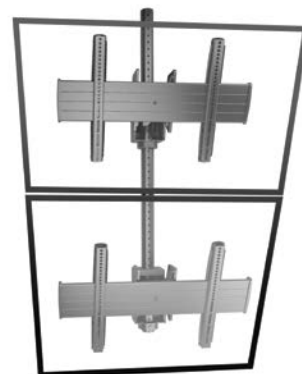**LCB1X2U** 32 - 60" BACK-TO-BACK STACKED


The back-to-back version of the LCM1x2U stacks two screens per side for four total screens and a 48" (121.9 cm) perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
100 lbs (45.3 kg)	16.5 x 26.8 x 10.2" (420 x 681 x 259 mm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

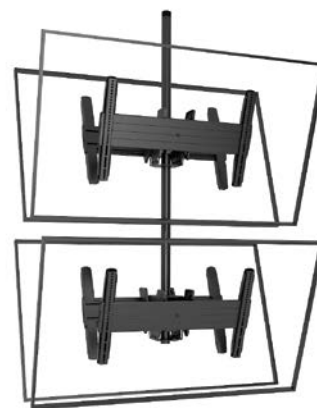**LCM3U** 32 - 65" TRIPLE MOUNT SYSTEM


Allows three screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	18.2 X 46.6 X 46.6" (46.2 x 118.4 x 118.4 cm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

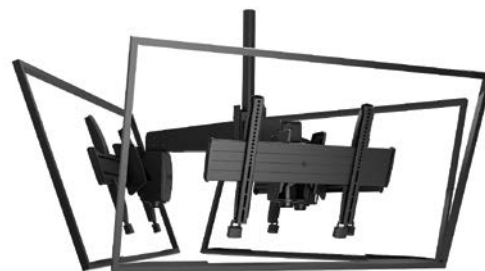**LCM4U** 32 - 65" QUAD MOUNT SYSTEM

Allows four screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
85 lbs (38.5 kg)	18.72 X 56 X 56" (47.5 x 142.2 x 142.2 cm)	200 x 100 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

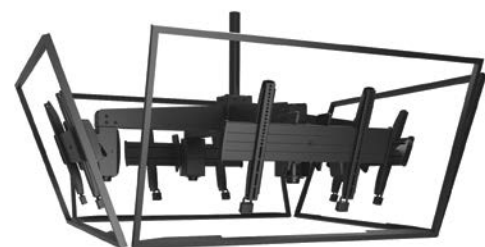

## MCM1U 26 - 50" CEILING MOUNT



The medium version of the LCM1U accommodates smaller mounting patterns as well as portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 20.8 x 6.4" (420 x 529 x 162 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>S</b> <b>B</b>




## MCB1U 26 - 50" BACK-TO-BACK LANDSCAPE



Back-to-back version of the MCM1U for two total screens in landscape or portrait configurations.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 20.8 x 10.2" (419 x 529 x 259 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>

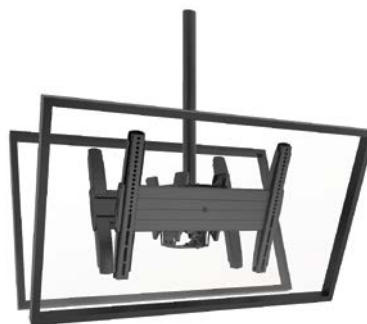

## MCM1X2U 26 - 50" STACKED LANDSCAPE



Stacked solution includes two MCM1U mounts and a 48" (121.9 cm) perforated CPA in a 1 wide x 2 tall configuration.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
125 lbs (56.7 kg)	16.5 x 20.8 x 6.4" (419 x 529 x 162 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



## MCB1X2U 26 - 50" BACK-TO-BACK STACKED



Back-to-back version of the MCM1x2U stacks two screens per side for four total screens and a 48" (121.9 cm) perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust	Color
100 lbs (45.3 kg)	16.5 x 20.8 x 10.2" (420 x 529 x 259 mm)	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



# FUSION™ VIDEO WALL, MENU BOARD & CEILING MOUNT ACCESSORIES



FCA510/515		Compatibility
Storage Accessories		All Fusion Ceiling & Freestanding Mounts
Model	Dimensions	
FCA510	10.5 x 10.5 x 3" (267 x 267 x 76 mm)	
FCA515	15.5 x 15.5 x 4.5" (394 x 394 x 114 mm)	



FCA520	Max. Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	3.25" (83 mm)	All Fusion Ceiling & Freestanding Mounts



FCA500	Dimensions (WxD)	Weight Capacity	Compatibility
Component / Video Conference Shelf - Below	18 x 11.28" (457 x 287 mm)	20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA501/502/503		Compatibility
Component / Video Conference Shelves - Above		Fusion Landscape Ceiling & Freestanding Mounts
Model	Dimensions (WxD)	Weight Capacity
FCA501	14 x 10" (356 x 254 mm)	10 lbs (4.5 kg)
FCA502	8 x 10" (203 x 254 mm)	10 lbs (4.5 kg)
FCA503	24 x 6" (609 x 152 mm)	10 lbs (4.5 kg)



FCA530	Weight Capacity	Compatibility
Center Channel Speaker Adapter	20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA535	Weight Capacity	Compatibility
Left/Right Speaker Adapters	10 lbs (4.5 kg) per side	All Fusion Ceiling & Freestanding Mounts



FCA540	Compatibility
Power Outlet Accessory	All Fusion Ceiling & Freestanding Mounts



FCAC	Compatibility
Menu Board Connector*	Fusion Ceiling-Mounted Menu Boards

\* For alignment and aesthetics only - not for bearing load.



FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts



FCAX08/14/20		Compatibility
Video Wall Extension Brackets		Fusion Video Wall & Menu Board Ceiling Mounts
Model	Length	
FCAX08	8" (203 mm)	
FCAX14	14" (356 mm)	
FCAX20	20" (508 mm)	



FCA3U	Compatibility
Triple Ceiling Mount Adapter	Allows for integration of different mount heads like the MCM1U, RLC1, RMC1 and JHS mounts



FCA4U	Compatibility
Quad Ceiling Mount Adapter	Allows for integration of different mount heads like the MCM1U, RLC1, RMC1 and JHS mounts

## 1½" NPT CEILING ACCESSORIES



CMA105	Weight Capacity
Ceiling Plate - 4" (102 mm)	500 lbs (226.8 kg)



CMA110	Compatibility
Ceiling Plate - 8" (203 mm)	500 lbs (226.8 kg)
Model	Color
CMA110	<b>B</b> (shown)
CMA110S	<b>S</b>
CMA110W	<b>W</b>



CMA115	Weight Capacity
Ceiling Plate - 6" (152 mm)	500 lbs (226.8 kg)
Model	Color
CMA115	<b>B</b> (shown)
CMA115S	<b>S</b>
CMA115W	<b>W</b>



CMA101	Weight Capacity
Designer Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA101	<b>B</b> (shown)
CMA101S	<b>S</b>
CMA101W	<b>W</b>



CMS115	Weight Capacity
Speed-Connect Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA115	<b>B</b> (shown)
CMA115S	<b>S</b>
CMA115W	<b>W</b>



CMA330	Weight Capacity
Offset Ceiling Plate - 8" (203 mm)	500 lbs (226.8 kg)



CMA345	Weight Capacity
Shock Absorption Ceiling Plate	500 lbs (226.8 kg)



CMA395	Weight Capacity
Angled Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA395	<b>B</b> (shown)
CMA395W	<b>W</b>



CMA360	Weight Capacity
I-Beam Clamp	250 lbs (113.4 kg)



CMA365	Weight Capacity
Truss Ceiling Adapter	250 lbs (113.4 kg)



CMS390/391	Weight Capacity
Dual Joist Ceiling Adapters - 16" (406 mm) / 24" (609 mm)	500 lbs (226.8 kg)



CMA450	Weight Capacity
Suspended Ceiling Kit	250 lbs (113.4 kg)*

## 1½" NPT CEILING ACCESSORIES



CMA455	Weight Capacity
Suspended Ceiling Tile Replacement Kit	250 lbs (113.4 kg)



CMS Fixed Columns		Weight Capacity
Fixed 1½" NPT extension columns available in black, silver and white†		500 lbs (226.8 kg)
Model	Length	Model Length
CMS003*	3" (76 mm)	CMS024 2' (0.6 m)
CMS006*	6" (152 mm)	CMS036 3' (0.9 m)
CMS009	9" (229 mm)	CMS048 4' (1.2 m)
CMS012	12" (305 mm)	CMS060 5' (1.5 m)
CMS018	18" (457 mm)	CMS072 6' (1.8 m)
* Steel construction. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.		



CMS Adjustable Columns		Weight Capacity
Adjustable 1½" NPT extension columns available in black, silver and white†		500 lbs (226.8 kg)
Model	Length	Model Length
CMS06009	6-9" (152-229 mm)	CMS0507 5-7' (1.5-2.1 m)
CMS009012	9-12" (229-305 mm)	CMS0608 6-8' (1.8-2.4 m)
CMS012018	12-18" (305-457 mm)	CMS0709 7-9' (2.1-2.7 m)
CMS018024	18-24" (457-610 mm)	CMS0810 8-10' (2.4-3.1 m)
CMS0203	2-3' (0.6-0.9 m)	CMS0911 9-11' (2.7-3.4 m)
CMS0305	3-5' (0.9-1.5 m)	CMS1012* 10-12' (3.1-3.7 m)
CMS0406	4-6' (1.2-1.8 m)	
* Cannot ship by UPS due to length. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.		



CMA700	Weight Capacity
6" (152 mm) Ceiling Plate with Adjustable Column	500 lbs (226.8 kg)
Model	Color
CMA700	<b>B</b> (shown)
CMA700S	<b>S</b>
CMA700W	<b>W</b>



CMA100	Weight Capacity
8" (203 mm) Ceiling Plate with Adjustable Column	500 lbs (226.8 kg)
Model	Color
CMA100	<b>B</b> (shown)
CMA100S	<b>S</b>
CMA100W	<b>W</b>



CMS261	Weight Capacity
CMS Column Cut-Off Adapter	500 lbs (226.8 kg)
Model	Color
CMS261	<b>B</b> (shown)
CMS261S	<b>S</b>
CMS261W	<b>W</b>



CMA502	Weight Capacity
Single Electric Power Outlet Coupler	500 lbs (226.8 kg)



CMA504	Weight Capacity
Dual Electric Power Outlet Coupler	500 lbs (226.8 kg)



CMA351	Weight Capacity
Heavy Duty Swivel Adapter	500 lbs (226.8 kg)



CMA152	Weight Capacity
Threaded Pipe Coupler with Cable Slot	500 lbs (226.8 kg)



## 1½" NPT CEILING ACCESSORIES



CMA270	Weight Capacity
Threaded Pipe Coupler	500 lbs (226.8 kg)
Model	Color
CMA270	<b>B</b> (shown)
CMA270S	<b>S</b>
CMA270W	<b>W</b>



CMA274/275	Compatibility
Quick-Snap Cable Covers (Qty 1 / 3)	1½" & 2" NPT Columns



CMA273	Compatibility
Threaded End Cap	1½" NPT Columns



CMA278	Compatibility
Vinyl End Cap (Qty 10)	1½" NPT & CPA Columns



CMA640	Compatibility
Decorative Ring, 1.9" (48 mm) ID	1½" NPT & CPA Columns
Model	Color
CMA640	<b>C</b> (shown)
CMA640B	<b>B</b>
CMA640W	<b>W</b>



CMA643	Compatibility	Color
Decorative Ring, 2.44" (62 mm) ID	CMS Outer Adjustable Columns	<b>S</b>

## CPA PIN CONNECTION ACCESSORIES



CPA330	Weight Capacity
CPA Offset Ceiling Plate	500 lbs (226.8 kg)



CPA395	Weight Capacity
CPA Angled Ceiling Plate	500 lbs (226.8 kg)



CPA365	Weight Capacity
CPA Truss Adapter	500 lbs (226.8 kg)



CPA262	Weight Capacity
CPA to NPT Column Connection Adapter (contains male 1½" NPT threads and accepts Chief CPA columns)	500 lbs (226.8 kg)
Model	Color
CPA262	<b>B</b> (shown)
CPA262S	<b>S</b>



CPA263	Weight Capacity
CPA column to CPA column connector	500 lbs (226.8 kg)



CPA264	Weight Capacity
NPT to CPA Column Connection Adapter (contains female 1½" NPT threads and accepts Chief's CPA columns)	500 lbs (226.8 kg)



CPA Columns		Weight Capacity	
Fixed, pin-connection extension columns available in black and silver†		500 lbs (226.8 kg)	
Model	Length	Model	Length
CPA018	18" (457 mm)	CPA060	5' (1.5 m)
CPA024	2' (0.6 m)	CPA072	6' (1.8 m)
CPA036	3' (0.9 m)	CPA096	8' (2.4 m)
CPA048	4' (1.2 m)	CPA120	10' (3.1 m)

† All part numbers listed are black. To order silver add an S to the end of the part number.



## AUTOMATED CEILING LIFT FEATURES



### CONTROL OPTIONS

Multiple control options include serial communication, dry contact control and IR remote (included).



### SMOOTH EXTENSION

Fast and quiet travel at more than 2" (51 mm) per second with preset viewing positions.




### CLICKCONNECT™

Hear an audible click when the screen engages with the mount. Easy to connect/disconnect - no tools needed!



### CABLE MANAGEMENT

Unique cable management system allows cables to move freely with the lift.



CONTROL OPTIONS



SMOOTH EXTENSION

## CM2C40 32 - 61" CEILING LIFT



Chief's automated ceiling lift with multiple control options including serial communication, dry contact control and IR remote.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Max. Extension	Overall Travel	Compatibility
190 lbs (86.2 kg)	31.3 x 23.8 x 7.8" (794 x 603 x 197 mm)	200 x 200 - 862 x 517 mm	71" (180 cm)	40" (102 cm)	110/120VAC 60 Hz



## OTHER CEILING, TRUSS & POLE MOUNTS

### RLC1 26 - 47" CEILING MOUNT



Basic single display ceiling Fit™ mount for efficient, eye-catching digital signage displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust
125 lbs (56.7 kg)	16.5 x 26.33 x 6.37" (419 x 669 x 162 mm)	Up to 610 x 400 mm	+5°, -20°	±3°



### RMCI 26 - 47" CEILING MOUNT



The smaller Fit™ series version of the RLC1 for narrower mounting patterns as well as portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Roll Adjust
125 lbs (56.7 kg)	16.5 x 20.27 x 6.92" (419 x 515 x 176 mm)	Up to 457 x 400 mm	+5°, -20°	±3°



### TPS 42 - 71" FIXED TRUSS & POLE MOUNT



This fixed solution for truss and pole mounting supports portrait and landscape orientations with the Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Truss Systems	Orientation
150 lbs (68 kg)	16.2 x 17.1 x 1.1" (412 x 433 x 27 mm)	200 x 200 - 862 x 517 mm	14" (OD) (356 mm)	Landscape, Portrait



## TPM 42 - 71" TILT POLE MOUNT



Mounts to poles with multiple tilt adjustment options along with portrait and landscape orientations with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Tilt Locking Points	Orientation
150 lbs (68 kg)	16.2 x 17.1 x 3.4" (412 x 433 x 86 mm)	200 x 200 - 862 x 517 mm	±15°	0°, 5°, 10° and 15°	Landscape, Portrait




## TPP 42 - 71" TILT TRUSS MOUNT



Tilt solution mounts to truss with multiple tilt adjustment options along with portrait and landscape orientations with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Tilt Locking Points	Orientation
150 lbs (68 kg)	16.2 x 17.1 x 4.1" (412 x 433 x 105 mm)	200 x 200 - 862 x 517 mm	±15°	0°, 5°, 10° and 15°	Landscape, Portrait

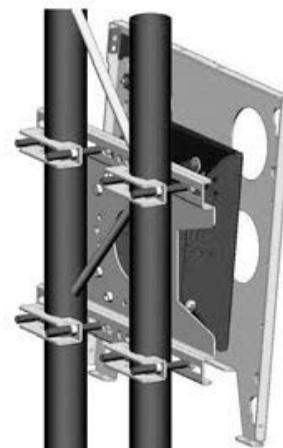

## JHS 26 - 45" CEILING MOUNT



Ceiling mount supports portrait and landscape orientations with swivel and Centris™ fingertip tilt in all directions.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Pivot/Tilt	Ordering Options	Color
75 lbs (34 kg)	6 x 6.6 x 5.1" (152 x 167 x 128 mm)	100 x 100 - 400 x 400 mm	±15°	Custom, Universal	<b>S</b> <b>B</b>



**JPP 26 - 45" PIVOT/TILT POLE MOUNT**

Pole clamp supports portrait and landscape orientations with Centris™ fingertip tilt in all directions.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Pivot/Tilt	Pole Diameter	Color
75 lbs (34 kg)	7.5 x 6 x 3.5" (189 x 152 x 89 mm)	100 x 100 - 400 x 400 mm	±15°	1.5 - 2" (38 - 51 mm)	<b>S</b> <b>B</b>

**FHS 13 - 23" CEILING MOUNT**

For smaller mounting patterns than JHS mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Pivot/Tilt	Ordering Options	Color
40 lbs (18.1 kg)	5.4 x 4.6 x 4.6" (138 x 116 x 118 mm)	75 x 75 - 200 x 100 mm	±15°	Custom, Universal	<b>S</b> <b>B</b>



## OTHER CEILING MOUNT ACCESSORIES



PACLR1/PACLR2	Weight Capacity	Compatibility
Left/Right Speaker Adapters	25 lbs (11.3 kg)	CM2C40, TPS, TPM, TPP & Other Q-Latch Mounts



PACCC1/PACCC2	Weight Capacity	Compatibility
Center Channel Speaker Adapters	35 lbs (15.9 kg)	CM2C40, TPS, TPM, TPP & Other Q-Latch Mounts



PACCCS1	Weight Capacity	Compatibility
Large Accessory Shelf	15 lbs (6.8 kg)	TPS, TPM, TPP & Other Q-Latch Mounts



PAC251/252/253	Compatibility
P-Series CPU/DVD/Media Player Adapters	TPS, TPM, TPP & Other Q-Latch Mounts
Model	Max. Equipment Size (HxWxD)
PAC251	17.63 x 15.5 x 3.5" (448 x 394 x 89 mm)
PAC252	16 x 14.5 x 4.5" (406 x 386 x 114 mm)
PAC253	20 x 15.75 x 1.81" (508 x 400 x 46 mm)



PAC715/716	Compatibility	
Video Conferencing Camera Shelves - Above or Below	TPS, TPM, TPP & Other Q-Latch Mounts	
Model	Dimensions (WxD)	Weight Capacity
PAC715	9 x 8.8" (229 x 223 mm)	10 lbs (4.5 kg)
PAC716	14 x 7.9" (356 x 301 mm)	10 lbs (4.5 kg)




FCA3U	Compatibility
Triple Ceiling Mount Adapter	Allows for integration of different mount heads like the MCM1U, RLC1, RMC1 and JHS mounts



FCA4U	Compatibility
Quad Ceiling Mount Adapter	Allows for integration of different mount heads like the MCM1U, RLC1, RMC1 and JHS mounts



PACPC1	Compatibility
Power Filter Kit	All Chief Wall Mounts



PAC400	Compatibility
P-Series Rotation Adapter	TPS, TPM, TPP & Other Q-Latch Mounts



TPK1/2	Compatibility
Pole Clamp Kits (2 pieces)	TPS, TPM
Model	Width
TPK1	1 - 2" (25 - 51 mm)
TPK2	2 - 3" (51 - 76 mm)



TPK3/4/5	Compatibility
Truss Clamp Kit (4 pieces)	TPS, TPP
Model	Outer Diameter
TPK3	0 - 1" (0 - 25 mm)
TPK4	1 - 2" (25 - 51 mm)
TPK5	2 - 3" (51 - 76 mm)



TPA105	Compatibility
TPM Mount Back Cover	TPM



## OTHER CEILING MOUNT ACCESSORIES



PAC136B/S	Compatibility
ClickConnect Locking Flag Kit - Black / Silver	TPS, TPM, TPP



PAC138	Compatibility
ClickConnect™ Padlock	TPS, TPM, TPP



KSA1021	Compatibility
Keyboard Tray Accessory	KPP110 keyboards up to 8" (203 mm) deep



KSA1005	Compatibility
Security Hardware Kit	KPP110
Model	Color
KSA1005B	<b>B</b>
KSA1005S	<b>S</b>



IR10	Compatibility
Infrared Remote Control	CM2C40, CM2L40



RC10	Compatibility
RF Remote Control	CM2C40, CM2L40

## 1½" NPT CEILING ACCESSORIES



CMA105	Weight Capacity
Ceiling Plate - 4" (102 mm)	500 lbs (226.8 kg)



CMA110	Compatibility
Ceiling Plate - 8" (203 mm)	500 lbs (226.8 kg)
Model	Color
CMA110	<b>B</b> (shown)
CMA110S	<b>S</b>
CMA110W	<b>W</b>



CMA115	Weight Capacity
Ceiling Plate - 6" (152 mm)	500 lbs (226.8 kg)
Model	Color
CMA115	<b>B</b> (shown)
CMA115S	<b>S</b>
CMA115W	<b>W</b>



CMA101	Weight Capacity
Designer Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA101	<b>B</b> (shown)
CMA101S	<b>S</b>
CMA101W	<b>W</b>



CMS115	Weight Capacity
Speed-Connect Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA115	<b>B</b> (shown)
CMA115S	<b>S</b>
CMA115W	<b>W</b>

## 1½" NPT CEILING ACCESSORIES



CMA330	Weight Capacity
Offset Ceiling Plate - 8" (203 mm)	500 lbs (226.8 kg)



CMA345	Weight Capacity
Shock Absorption Ceiling Plate	500 lbs (226.8 kg)



CMA395	Weight Capacity
Angled Ceiling Plate	500 lbs (226.8 kg)
Model	Color
CMA395	<b>B</b> (shown)
CMA395W	<b>W</b>



CMA360	Weight Capacity
I-Beam Clamp	250 lbs (113.4 kg)



CMA365	Weight Capacity
Truss Ceiling Adapter	250 lbs (113.4 kg)



CMS390/391	Weight Capacity
Dual Joist Ceiling Adapters - 16" (406 mm) / 24" (609 mm)	500 lbs (226.8 kg)



CMA450	Weight Capacity
Suspended Ceiling Kit	250 lbs (113.4 kg)



CMA455	Weight Capacity
Suspended Ceiling Tile Replacement Kit	250 lbs (113.4 kg)



CMS Fixed Columns		Weight Capacity	
Fixed 1½" NPT extension columns available in black, silver and white†		500 lbs (226.8 kg)	
Model	Length	Model	Length
CMS003*	3" (76 mm)	CMS024	2' (0.6 m)
CMS006*	6" (152 mm)	CMS036	3' (0.9 m)
CMS009	9" (229 mm)	CMS048	4' (1.2 m)
CMS012	12" (305 mm)	CMS060	5' (1.5 m)
CMS018	18" (457 mm)	CMS072	6' (1.8 m)

*\* Steel construction. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.*



CMS Adjustable Columns		Weight Capacity	
Adjustable 1½" NPT extension columns available in black, silver and white* in black, silver and white†		500 lbs (226.8 kg)	
Model	Length	Model	Length
CMS006009	6-9" (152-229 mm)	CMS0507	5-7' (1.5-2.1 m)
CMS009012	9-12" (229-305 mm)	CMS0608	6-8' (1.8-2.4 m)
CMS012018	12-18" (305-457 mm)	CMS0709	7-9' (2.1-2.7 m)
CMS018024	18-24" (457-610 mm)	CMS0810	8-10' (2.4-3.1 m)
CMS0203	2-3' (0.6-0.9 m)	CMS0911	9-11' (2.7-3.4 m)
CMS0305	3-5' (0.9-1.5 m)	CMS1012*	10-12' (3.1-3.7 m)
CMS0406	4-6' (1.2-1.8 m)		

*\* Cannot ship by UPS due to length. † All part numbers listed are black. To order alternate colors add an S (silver) or W (white) to the end of the part number.*



CMA700	Weight Capacity
6" (152 mm) Ceiling Plate with Adjustable Column	500 lbs (226.8 kg)
Model	Color
CMA700	<b>B</b> (shown)
CMA700S	<b>S</b>
CMA700W	<b>W</b>

## 1½" NPT CEILING ACCESSORIES



CMA100		Weight Capacity
8" (203 mm) Ceiling Plate with Adjustable Column		500 lbs (226.8 kg)
Model	Color	
CMA100	<b>B</b> (shown)	
CMA100S	<b>S</b>	
CMA100W	<b>W</b>	



CMS261		Weight Capacity
CMS Column Cut-Off Adapter		500 lbs (226.8 kg)
Model	Color	
CMS261	<b>B</b> (shown)	
CMS261S	<b>S</b>	
CMS261W	<b>W</b>	



CMSH3		Weight Capacity
Column Height Adjustment Accessory, 3" (76 mm)		25 lbs (11.3 kg)
Model	Color	
CMSH3	<b>B</b> (shown)	
CMSH3S	<b>S</b>	



CMA502		Weight Capacity
Single Electric Power Outlet Coupler		500 lbs (226.8 kg)



CMA504		Weight Capacity
Dual Electric Power Outlet Coupler		500 lbs (226.8 kg)



CMA351		Weight Capacity
Heavy Duty Swivel Adapter		500 lbs (226.8 kg)



CMA152		Weight Capacity
Threaded Pipe Coupler with Cable Slot		500 lbs (226.8 kg)



CMA270		Weight Capacity
Threaded Pipe Coupler		500 lbs (226.8 kg)
Model	Color	
CMA270	<b>B</b> (shown)	
CMA270S	<b>S</b>	
CMA270W	<b>W</b>	



CMA274/275		Compatibility
Quick-Snap Cable Covers (Qty 1 / 3)		1½" & 2" NPT Columns



CMA273		Compatibility
Threaded End Cap		1½" NPT Columns



CMA278		Compatibility
Vinyl End Cap (Qty 10)		1½" NPT & CPA Columns



CMA640		Compatibility
Decorative Ring, 1.9" (48 mm) ID		1½" NPT & CPA Columns
Model	Color	
CMA640	<b>G</b> (shown)	
CMA640B	<b>B</b>	
CMA640W	<b>W</b>	



CMA643		Compatibility	Color
Decorative Ring, 2.44" (62 mm) ID		CMS Outer Adjustable Columns	<b>S</b>



## FREESTANDING TV MOUNTS

### FUSION™ VIDEO WALL FEATURES



#### INDEPENDENT, TOOL-FREE ADJUSTMENT

Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.



#### CONTINUOUS ADJUSTMENT

Continuous vertical and lateral adjustments allow for tight display rows and columns.



#### CABLE MANAGEMENT

FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.



#### INSTALLATION OPTIONS

Configurations come in cart or bolt-down applications to meet temporary or permanent signage needs.



#### ADD EXTENSION

FCAX accessories increase rail length for larger displays, up to 60" (152 cm).




INDEPENDENT  
ADJUSTMENT

**LVM3X3U** 42 - 46" LANDSCAPE CART


The landscape-oriented, 3 wide x 3 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	92.5 x 108 x 40.4" (235 x 274.3 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

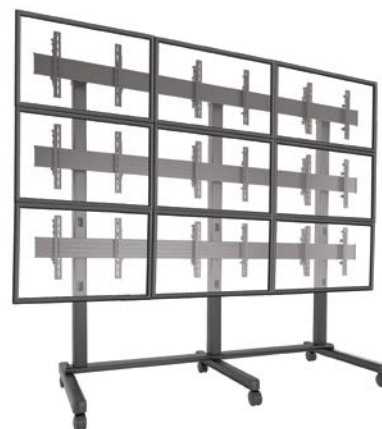**LBM3X3U** 42 - 46" LANDSCAPE BOLT-DOWN WALL


The landscape-oriented, 3 wide x 3 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	90.9 x 108.9 x 9.5" (231 x 277 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

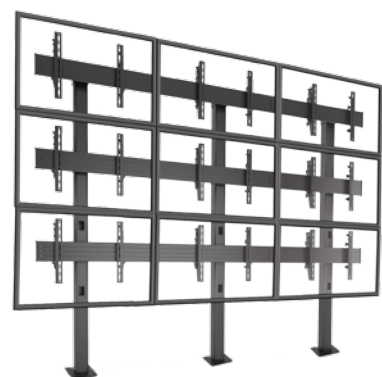**LVM3X2U** 42 - 46" LANDSCAPE CART

The landscape-oriented, 3 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	74.5 x 108 x 40.4" (189.3 x 274.3 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

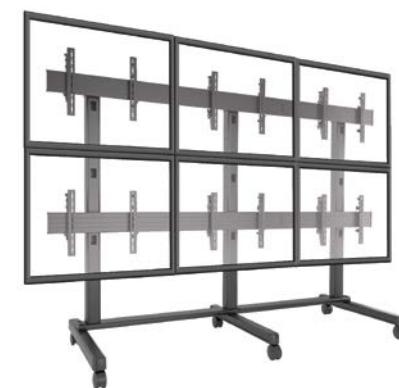**LVM3X2UP** 42 - 46" PORTRAIT CART

The portrait version of the LVM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	106.7 x 68 x 40.4" (271 x 172.7 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)




### LBM3X2U 42 - 46" LANDSCAPE BOLT-DOWN WALL




The landscape-oriented, 3 wide x 2 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	72.9 x 108.9 x 9.5" (185.2 x 276.6 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

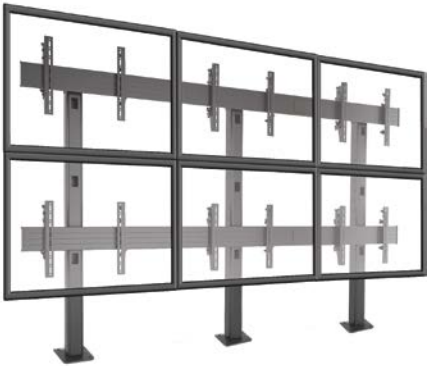

### LBM3X2UP 42 - 46" PORTRAIT BOLT-DOWN WALL



The portrait version of the LBM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	98.6 x 68 x 9.7" (250.4 x 172.7 x 24.4 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)



### LVM3X1UP 42 - 46" PORTRAIT CART



The portrait-oriented, 3 wide x 1 tall configuration with smooth rolling casters for temporary menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	88.7 x 68 x 40.4" (225.3 x 172.7 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)



### LBM3X1UP 42 - 46" PORTRAIT BOLT-DOWN WALL



The portrait-oriented, 3 wide x 1 tall configuration for bolt-down menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	80.6 x 68 x 9.7" (204.7 x 172.7 x 24.4 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)





**LVM2X2U** 42 - 46" LANDSCAPE CART

Our top performing, landscape-oriented, 2 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	80.5 x 72.5 x 40.4" (204.5 x 184.2 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

**LVM2X2UP** 42 - 46" PORTRAIT CART


The portrait version of the LVM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	106.7 x 46 x 40.4" (271 x 116.8 x 102.6 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

**LBM2X2U** 42 - 46" LANDSCAPE BOLT-DOWN WALL

The landscape-oriented, 2 wide x 2 tall configuration for bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
125 lbs (56.7 kg)	72.9 x 72.9 x 9.5" (185.2 x 185.2 x 23.9 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)

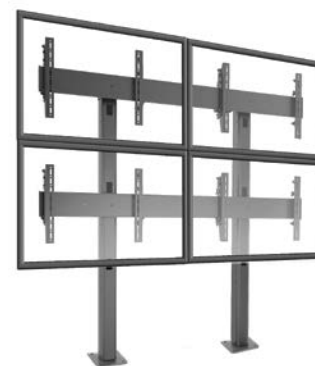**LBM2X2UP** 42 - 46" PORTRAIT BOLT-DOWN WALL

The portrait version of the LBM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust (per screen)	Plumb Adjust
100 lbs (45.4 kg)	98.6 x 46 x 9.7" (250.4 x 116.8 x 24 cm)	Any Width x 100 - 400 mm	0.75" (19 mm)	0.75" (19 mm)





# FUSION™ VIDEO WALL ACCESSORIES

**60"**  
OPTION


FCAX08/14/20		Compatibility
Video Wall Extension Bracket (Qty 1 Bracket)		Fusion Video Wall & Menu Board Ceiling Mounts
Model	Length	
FCAX08	8" (203 mm)	
FCAX14	14" (356 mm)	
FCAX20	20" (508 mm)	



FCABX18/36		Compatibility
Video Wall Height Extension Brackets (Qty 1 Bracket*)		Fusion Bolt-Down Video Wall Mounts
Model	Length	
FCABX18	18" (203 mm)	
FCABX36	36" (914 mm)	

\*Must order one bracket for each bolt-down foot



FCA2X1U		Compatibility
LVM & LBM 2x1 Accessory		LVM2X2U, LBM2X2U



FCA3X1U		Compatibility
LVM & LBM 3x1 Accessory		LVM3X2U, LBM3X2U



FCA776		Compatibility
LVM Leveling Feet		Fusion LVM Video Wall Mounts



FCA510/515		Compatibility
Storage Accessories		All Fusion Ceiling & Freestanding Mounts
Model	Dimensions (HxWxD)	
FCA510	10.5 x 10.5 x 3" (267 x 267 x 76 mm)	
FCA515	15.5 x 15.5 x 4.5" (394 x 394 x 114 mm)	



FCA520		Max. Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)		3.25" (83 mm)	All Fusion Ceiling & Freestanding Mounts



FCA500		Dimensions (WxD)	Weight Capacity	Compatibility
Component / Video Conference Shelf - Below		18 x 11.28" (457 x 287 mm)	20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA501/502/503		Compatibility		
Component / Video Conference Shelves - Above		Fusion Landscape Ceiling & Freestanding Mounts		
Model	Dimensions (WxD)	Weight Capacity		
FCA501	14 x 10" (356 x 254 mm)	10 lbs (4.5 kg)		
FCA502	8 x 10" (203 x 254 mm)	10 lbs (4.5 kg)		
FCA503	24 x 6" (609 x 152 mm)	10 lbs (4.5 kg)		



FCA530		Weight Capacity	Compatibility
Center Channel Speaker Adapter		20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA535		Weight Capacity	Compatibility
Left/Right Speaker Adapters		10 lbs (4.5 kg) per side	All Fusion Ceiling & Freestanding Mounts



FCA540		Compatibility
Power Outlet Accessory		All Fusion Ceiling & Freestanding Mounts



FCACLIPS		Compatibility
Cable Quick Ties (Qty 10)		All Fusion Ceiling & Freestanding Mounts

## FUSION™ CARTS & STANDS

### FEATURES



#### HEIGHT ADJUST

Turn knob allows a single user to raise and lower the screen up to 20" (50 cm) by hand or power drill.



#### CABLE MANAGEMENT

Flexible cable covers and/or removable covers allow access at any point along the column while concealing cables for a clean installation.



#### CUSTOMIZABLE

A host of available accessories allows for customized solutions to meet any need.



#### LOCKING CASTORS

Smooth rolling and lockable castors make transportation and positioning easy.

### XVAU 37 - 70" VIDEO CONFERENCE CART



Aesthetically designed cart with two-toned finish is ideal for corporate and classroom environments. Ships fully assembled with 11 RUs of storage space for rack mountable and non-rack mountable AV components.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
250 lbs (113 kg)	54.9 x 38.8 x 29.0" (139.5 x 98.6 x 73.7 cm)	200 x 200 - 800 x 400 mm	41.9 - 50.4" (106.4 - 128 cm)	±2.5°	



### XPAU 55 - 100"+ HEAVY-DUTY CART



Includes a built-in 2U rack space for AV equipment while supporting heavy displays up to 300 lbs (136 kg). Great for video conferencing when used with the dual display accessory.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
300 lbs (136 kg)	73.9 x 58 x 34.5" (187.7 x 147.3 x 87.7 cm)	200 x 200 - 800 x 400 mm	48 - 66" (121.9 - 167.6 cm)	±5°	



**LPAU** 40 - 80" HEIGHT-ADJUSTABLE CART

This popular, aesthetically designed cart works well in classrooms and corporate environments.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
200 lbs (90.7 kg)	77.9 x 45 x 33.3" (180.1 x 114 x 84.5 cm)	200 x 200 - 800 x 400 mm	50 - 70" (127 - 177 cm)	±5°	<b>S</b> <b>B</b>

**LFAU** 40 - 80" HEIGHT-ADJUSTABLE STAND

The stand version of the LPAU for semi-permanent installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust	Tilt	Color
200 lbs (90.7 kg)	72.4 x 38.1 x 30.6" (183.9 x 96.8 x 77.7 cm)	200 x 200 - 650 x 400 mm	44.5 - 64.5" (113 - 164 cm)	±5°	<b>S</b> <b>B</b>

**MPAU** 37 - 55" HEIGHT-ADJUSTABLE CART

A smaller version of the LPAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
125 lbs (56.7 kg)	77.9 x 47.8 x 32" (197.9 x 121.4 x 81.3 cm)	200 x 100 - 600 x 400 mm	50 - 70" (127 - 177 cm)	±5°	<b>S</b> <b>B</b>

**MFAU** 37 - 55" HEIGHT-ADJUSTABLE STAND

A smaller version of the LFAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
125 lbs (56.7 kg)	72.4 x 38.1 x 30.6" (183.9 x 96.8 x 77.7 cm)	200 x 100 - 600 x 400 mm	44.5 x 64.5" (113 - 163 cm)	±5°	<b>S</b> <b>B</b>



## FUSION™ CART & STAND ACCESSORIES



FCA612	Dimensions (WxD)	Weight Capacity	Compatibility
Large, Height-Adjustable Accessory Shelf	48 x 20.9" (121.9 x 52.9 cm)	25 lbs (11.3 kg)	MPAU, MFAU, LPAU, LFAU, XPAU



FCA611	Dimensions (WxD)	Weight Capacity	Compatibility
Small, Height-Adjustable Accessory Shelf	24.36 x 15.21" (619 x 386 mm)	25 lbs (11.3 kg)	MPAU, MFAU, LPAU, LFAU



FCA623	Dimensions (HxW)	Weight Capacity	Compatibility
XL Cart Dual Monitor Accessory	5.72 x 38.2" (145 x 970 mm)	125 lbs (56.7 kg)	XPAU, XVAU



FCA650/651	Compatibility
Large & Medium CPU Holders	MPAU, MFAU, LPAU, LFAU, XPAU
Model	Max. Equipment Size (HxWxD)
FCA650	15 x 5.13 x 15" (381 x 130 x 381 mm)
FCA651	110 x 3.63 x 10" (254 x 92 x 254 mm)



FCA510/515	Compatibility
Storage Accessories	All Fusion Ceiling & Freestanding Mounts
Model	Dimensions (HxWxD)
FCA510	10.5 x 10.5 x 3" (267 x 267 x 76 mm)
FCA515	15.5 x 15.5 x 4.5" (394 x 394 x 114 mm)



FCA520	Max. Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	3.25" (83 mm)	All Fusion Ceiling & Freestanding Mounts



FCA500	Dimensions (WxD)	Weight Capacity	Compatibility
Component / Video Conference Shelf - Below	18 x 11.28" (457 x 287 mm)	20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA501/502/503	Compatibility	
Component / Video Conference Shelves - Above	Fusion Landscape Ceiling & Freestanding Mounts	
Model	Dimensions (WxD)	Weight Capacity
FCA501	14 x 10" (356 x 254 mm)	10 lbs (4.5 kg)
FCA502	8 x 10" (203 x 254 mm)	10 lbs (4.5 kg)
FCA503	24 x 6" (609 x 152 mm)	10 lbs (4.5 kg)



FCA530	Weight Capacity	Compatibility
Center Channel Speaker Adapter	20 lbs (9.1 kg)	Fusion Landscape Ceiling & Freestanding Mounts



FCA535	Weight Capacity	Compatibility
Left/Right Speaker Adapters	10 lbs (4.5 kg) per side	All Fusion Ceiling & Freestanding Mounts



FCA540	Compatibility
Power Outlet Accessory	All Fusion Ceiling & Freestanding Mounts



FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts



## AUTOMATED POP-UP LIFT FEATURES



### CONTROL OPTIONS

Multiple control options include serial communication, dry contact control and IR remote (included).



### SMOOTH EXTENSION

Fast and quiet travel at more than 2" (51 mm) per second with preset viewing positions.




### CLICKCONNECT™

Hear an audible click when the screen engages with the mount. Easy to connect/disconnect - no tools needed!



### CABLE MANAGEMENT

Unique cable management system allows cables to move freely with the lift.



CONTROL OPTIONS



SMOOTH EXTENSION

## CM2L40 31 - 61" POP-UP LIFT



An automated floor lift with multiple control options including serial communication and IR remote.

Weight Capacity	Dimensions (HxWxD) (Retracted)	Mounting Patterns (WxH)	Max. Extension	Overall Travel	Compatibility
190 lbs (86.2 kg)	30.6 x 23.8 x 7.7" (77.8 x 60.3 x 19.5 cm)	200 x 200 - 862 x 517 mm	71" (180.3 cm)	40" (101.6 cm)	110/120VAC 60 Hz



## OTHER CART & STAND TV MOUNTS

### PFC 42 - 71" HEIGHT-ADJUSTABLE CART



A collapsible mobile cart for portrait and landscape orientations - ideal for corporate and rental/staging applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor range	Tilt	Color
200 lbs (90.7 kg)	81.6 x 37.1 x 32.1" (207.3 x 94.3 x 81.6 cm)	200 x 200 - 862 x 517 mm	48.13 - 72.13" (122 - 183 cm)	±15°	<b>S</b> <b>B</b>



### PF2 42 - 71" BACK-TO-BACK STAND



Back-to-back floor stand with telescoping height adjustment, portrait/landscape orientation and integrated cable management - ideal for digital signage.

Weight Capacity*	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
200 lbs (90.7 kg)	94.5 x 36 x 43" (240 x 91.4 x 109.2 cm)	200 x 200 - 862 x 517 mm	51.38 - 85.38" (130 - 217 cm)	±15°	<b>S</b> <b>B</b>

\* per screen



### PF1 42 - 71" HEIGHT-ADJUSTABLE STAND



A solid, low profile single display floor stand with integrated cable management and support for both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
200 lbs (90.7 kg)	94 x 36 x 30" (238.8 x 91.4 x 76.2 cm)	200 x 200 - 862 x 517 mm	51.38 - 85.38" (130 - 217 cm)	±15°	<b>S</b> <b>B</b>



## PFM 3 - 4' TALL CONFIDENCE CART



This collapsible, shorter version of the PFC is ideal for interactive touch and confidence monitors. Fits 42 - 71" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
200 lbs (90.7 kg)	57.2 x 36.1 x 25.2" (145.3 x 91.7 x 64 cm)	200 x 200 - 862 x 517 mm	37.63 - 49.63" (96 - 126 cm)	+45°, +15°	<b>S</b> <b>B</b>



## PFQ 2' TALL CONFIDENCE CART



The shorter version of the PFM is ideal for confidence monitors. Fits 42 - 71" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
200 lbs (90.7 kg)	29.5 x 36.1 x 25.2" (74.9 x 91.7 x 64 cm)	200 x 200 - 862 x 517 mm	19.88 - 21.88" (505 - 556 mm)	+45°, +15°	<b>S</b> <b>B</b>



## MFC 30 - 55" HEIGHT-ADJUSTABLE CART



Smaller version of the PFC with landscape and portrait orientation capability.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
125 lbs (56.7 kg)	77.8 x 37.1 x 32.1" (197.5 x 94.3 x 81.6 cm)	100 x 100 - 709 x 431 mm	48 - 72" (122 - 183 cm)	±15°	<b>S</b> <b>B</b>





## MF2 30 - 55" BACK-TO-BACK STAND



Back-to-back floor stand with telescoping height adjustment and integrated cable management - ideal for digital signage. Supports portrait and landscape orientations.

Weight Capacity*	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
125 lbs (56.7 kg)	91.6 x 36 x 43" (232.7 x 91.4 x 109.2 cm)	100 x 100 - 709 x 431 mm	51.25 - 85.88" (130 - 218 cm)	±15°	<b>S</b> <b>B</b>

\*per screen



## MF1 30 - 55" HEIGHT-ADJUSTABLE STAND



A solid, low profile single display floor stand with integrated cable management. Supports portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
125 lbs (56.7 kg)	91.6 x 36 x 30" (232.7 x 91.4 x 76.2 cm)	100 x 100 - 709 x 431 mm	51.25 - 85.88" (130 - 218 cm)	±15°	<b>S</b> <b>B</b>



## OTHER CART & STAND ACCESSORIES



PACLR1/PACLR2	Weight Capacity	Compatibility
Left/Right Speaker Adapters	25 lbs (11.3 kg)	PFC, PF1, MFC, MF1 & Other Q-Latch Mounts



PACCC1/PACCC2	Weight Capacity	Compatibility
Center Channel Speaker Adapters	35 lbs (15.9 kg)	PFC, PF1, MFC, MF1, PDR, PNR, CM2C40, CM2L40




PAC251/252	Compatibility
P-Series CPU/DVD/Media Player Adapters	P-Series Carts & Stands
Model	Max. Equipment Size (HxWxD)
PAC251	17.63 x 15.5 x 3.5" (448 x 394 x 89 mm)
PAC252	16 x 14.5 x 4.5" (406 x 386 x 114 mm)



MAC251/252	Compatibility
M-Series CPU/DVD/Media Player Adapters	M-Series Carts & Stands
Model	Max. Equipment Size (HxWxD)
MAC251	NA x 13.75 x 3.88" (NA x 349 x 99 mm)
MAC252	10 x 9.5 x 2" (254 x 241 x 51 mm)



PAC400	Compatibility
P-Series Rotation Adapter	P-Series Carts & Stands



MAC400	Compatibility
M-Series Rotation Adapter	M-Series Carts & Stands



PAC722	Compatibility
P-Series Dual Side-by-Side Display Accessory	PFC, PF1, PF2



MAC722	Compatibility
M-Series Dual Side-by-Side Display Accessory	MFC, MF1, MF2



PAC720	Compatibility
P-Series Dual Vertical Display Accessory	PFC, PF1, PF2



MAC720	Compatibility
M-Series Dual Vertical Display Accessory	MFC, MF1, MF2



PAC790	Compatibility
P-Series Swivel Accessory	PF1, PFC



MAC790	Compatibility
M-Series Swivel Accessory	MF1, MFC



PAC715/716		Compatibility
Video Conferencing Camera Shelves - Above or Below		P-Series (14 x 14") & M-Series (200 x 200 mm) Q-Latch
Model	Dimensions (WxD)	Weight Capacity
PAC715	9 x 8.8" (229 x 223 mm)	10 lbs (4.5 kg)
PAC716	14 x 7.9" (356 x 301 mm)	10 lbs (4.5 kg)



PAC710	Dimensions (WxD)	Weight Capacity	Compatibility
Height Adjustable Accessory Shelf	18 x 12" (457 x 305 mm)	25 lbs (11.3 kg)	P- & M-Series Carts & Floor Stands



PAC717	Compatibility
Literature Shelf	PFC, MFC

## OTHER CART & STAND ACCESSORIES



PAC730A/B/C	Max. Equipment Size (HxWxD)	Compatibility
Secure Storage Shelf w/ 3 Lock Options	3.5 x 17.5 x 12" (89 x 445 x 305 mm)	P- & M-Series Carts & Floor Stands



PAC735A/B/C	Max. Equipment Size (HxWxD)	Compatibility
Secure Storage Cabinet w/ 3 Lock Options	9 x 19 x 19" (229 x 483 x 483 mm)	PFC, MFC



PAC775	Compatibility
Outdoor Casters	P- & M-Series Carts



PAC770	Compatibility
Heavy-Duty Casters	P- & M-Series Carts



PAC780/782/784	Compatibility
Height Assist Accessories	PFC, MFC
Model	Equipment Weight Capacity
PAC780	50 - 75 lbs (22.7 - 34 kg)
PAC782	75 - 100 lbs (34 - 45.4 kg)
PAC784	100 - 125 lbs (45.4 - 56.7 kg)



QMPIC	Compatibility
CPU Mount	P- & M-Series Carts & Floor Stands

PACTP1	Compatibility
Touch Panel Stabilizer Kit	P- & M-Series Carts & Floor Stands



PAC700	Compatibility
Mobile Cart Travel Case	PFC, MFC



KFA220B/S	Compatibility
Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA225B/S	Compatibility
Widescreen Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA320B/S	Compatibility
Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA325B/S	Compatibility
Widescreen Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



PAC136B/S	Compatibility
ClickConnect Locking Flag Kit - Black / Silver	P- & M-Series Carts & Floor Stands



PAC138	Compatibility
ClickConnect Padlock	P- & M-Series Carts & Floor Stands



IR10	Compatibility
Infrared Remote Control	CM2L40, CM2C40



RC10	Compatibility
RF Remote Control	CM2L40, CM2C40

## TABLE STAND TV MOUNTS

### STLU 32 - 52" TABLE STAND



This bolt-down swivel table stand ships with security hardware – ideal for hospitality installs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Swivel Options
125 lbs (56.7 kg)	23.8 x 27.5 x 5.5" (603 x 698 x 140 mm)	100 x 100 - 600 x 400 mm	15°, 30°, 45° or 90°



### PSS 32 - 50" SWIVEL TABLE STAND



A large freestanding, height adjustable table stand with bolt-down and swivel capability.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust	Swivel Options	Roll	Color
150 lbs (68 kg)	20.7 x 16.3 x 9.3" (526 x 413 x 236 mm)	200 x 200 - 862 x 517 mm	6.5" (165 mm)	45°	±2.5°	<b>S</b> <b>B</b>



### MTS 30 - 50" BOLT-DOWN TABLE STAND



A bolt-down swivel table stand with keyed locking – ideal for hospitality installs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjustment	Swivel Options	Color
100 lbs (45.4 kg)	23.2 x 17.8 x 6.9" (58.8 x 45.4 x 17.5 cm)	200 x 100 - 400 x 200 mm	3.75" (95 mm)	270°	<b>S</b> <b>B</b>



## MSS 30 - 50" SWIVEL TABLE STAND



Similar to the PSS, but accommodates smaller mounting patterns for medium flat panel monitors or TVs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust	Swivel Options	Roll	Color
150 lbs (68 kg)	19.3 x 14.3 x 9.3" (489 x 362 x 236 mm)	100 x 100 - 709 x 431 mm	5.25" (133 mm)	45°	±2.5°	<b>S</b> <b>B</b>



## STS1 18 - 30" BOLT-DOWN TABLE STAND



This secure, bolt-down table stand for small screens provides swivel and tilt capability - ideal for point of sale applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Height Adjust	Pivot/Tilt	Swivel Range Options
30 lbs (13.6 kg)	16.1 x 6 x 6.9" (409 x 152 x 175 mm)	75 x 75 - 100 x 100 mm	5.1" (130 mm)	±15°	90°, 180°, 270°



## OTHER TABLE STAND MOUNT ACCESSORIES



PACLR1/PACLR2	Weight Capacity	Compatibility
Left/Right Speaker Adapters	25 lbs (11.3 kg)	PFC, PF1, MFC, MF1 & Other Q-Latch Mounts



PAC150	Dimensions (WxD)	Weight Capacity	Compatibility
Video Conference Shelf - Above	12 x 7" (305 x 178 mm)	10 lbs (4.5 kg)	PSS



PAC136B/S	Compatibility
ClickConnect Locking Flag Kit - Black / Silver	PSS, MSS



PAC138	Compatibility
ClickConnect Padlock	PSS, MSS

# DESK MONITOR MOUNTS

## KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS FEATURES



### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



### ULTIMATE FLEXIBILITY

Gas-spring technology provides smooth dynamic height adjustment up to 13" (330 mm) and enables ideal positioning.



### CABLE MANAGEMENT

Tool-free cable management covers create a clean, professional look.



### FAST INSTALLATION

Simple 3-step installation and integrated quick-connect monitor interface makes mounting and maintenance easy.



### CENTRIS® EXTREME TILT

Tilts +75°/-10° for the ultimate ergonomic solution.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



## K1C220 DUAL MONITOR COLUMN CLAMP



Featuring dual-link arms, this dynamic mount provides extended reach for two monitors. Offers independent manual height adjust on the column up to 7" (178 mm) and dynamic height adjust up to 13" (330 mm).

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
3.5" (90 mm)	20.6" (523 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1C210 DUAL MONITOR COLUMN CLAMP



Provides a low-profile solution for two monitors installed next to a cubical wall or adjacent desk, with 7" (178 mm) independent manual height adjust and dynamic height adjust up to 13" (330 mm). Features single-link arms.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
3.5" (90 mm)	13.9" (352 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1C22H DUAL MONITOR COLUMN CLAMP ARRAY



Securely holds two monitors on an array bar. Offers manual height adjust on the column up to 7" (178 mm) and dynamic height adjust up to 13" (330 mm) with dual-link arm.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
6.2" (156 mm)	23.1" (587 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>



## K1C120 SINGLE MONITOR COLUMN CLAMP



Dynamic dual-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 7" (178 mm) and dynamic height adjustment up to 13" (330 mm).

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
5.5" (140 mm)	22.5" (571 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1C110 SINGLE MONITOR COLUMN CLAMP



Dynamic single-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 7" (178 mm) and dynamic height adjustment up to 13" (330 mm).

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
5.5" (140 mm)	15.7" (400 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1D220 DUAL MONITOR DESK CLAMP



Featuring dual-link arms, this dynamic mount securely holds two monitors and provides 13" (330 mm) of dynamic height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
4.1" (105 mm)	21.6" (548 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1D22H DUAL MONITOR DESK ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible dual-link arm offers dynamic height adjustment up to 13" (330 mm).

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
4.3" (108 mm)	21.2" (539 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>



## K1D120 SINGLE MONITOR DESK CLAMP



Dynamic dual-link mount securely holds a single monitor and provides up to 13" (330 mm) of dynamic height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
3.6" (92 mm)	20.6" (523 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



# KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS

## ACCESSORIES



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*



KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223



KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products




KRA300	Compatibility
Laptop Accessory	K1 Series Mounts



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1 Series)



KRA400B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2B iPad interface



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1 Series)



KRA401B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2TB iPad interface

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, KS200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.

## KONTOUR™ K2 DESK MOUNT

### FEATURES



#### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



#### ULTIMATE FLEXIBILITY

Column mount slides vertically along column for ideal positioning and provides 7" (178 mm) of manual height adjustment.



#### FAST INSTALLATION

Tear-drop hole pattern for easy mounting and maintenance.



#### CABLE MANAGEMENT

Tool-free cable management guide clips for a clean, professional look.



#### CENTRIS® TILT

Tilts ±15 degrees for a flexible ergonomic solution.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

### K2C220 DUAL MONITOR COLUMN CLAMP



Dual monitor column clamp mounts easily to edge of desk. Features flexible dual-link arms with independent manual height adjustment.



Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
4.1" (105 mm)	17.6" (448 mm)	25 lbs (11.3 kg)	<b>S</b> <b>B</b>

### K2C22H DUAL MONITOR COLUMN ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible, dual-link arm offers manual height adjustment.



Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
6.2" (156 mm)	19.7" (500 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>

## K2C120 SINGLE MONITOR COLUMN CLAMP



Single monitor column clamp mounts easily to the edge of desk. Features flexible dual-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
6" (152 mm)	19.5" (495 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>



## K2C110 SINGLE MONITOR COLUMN CLAMP



Single monitor column clamp mounts easily to the edge of desk. Features single-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
6" (152 mm)	12.8" (324 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>



## KONTOUR™ K2 SERIES DESK MOUNT ACCESSORIES



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*



KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223



KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*




FSB4090B	Compatibility
Custom Interface Bracket for Cisco® EX90	K2 Series Mounts



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1 Series)



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1 Series)

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.



# DESK ARRAY MONITOR MOUNTS

## KONTOUR™ K3 STATIC DESK ARRAYS FEATURES



### LATERAL SHIFT

Centris heads are easily moved along array arms for quick lateral shift adjustments.



### ULTIMATE FLEXIBILITY

Independently height adjustable arms (and center head where applicable) provide seamless screen alignment. Arms can be adjusted from 0° to 15° for customized viewing angles.



### HEAVY DUTY DESIGN

Features sleek, solidly constructed arms with that hold 15 lbs (6.8 kg) per monitor.



### CENTRIS® TILT

Offers up to ±12 degrees of Centris™ fingertip tilt for effortless display positioning.



### MODULARITY

Meets a wide range of monitor sizes and configurations. A great multi-array solution for call centers, security desks, IT, health care, control rooms and other multi-monitor settings.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

**K3F220** FREESTANDING 2x2 ARRAY

Static freestanding array mount for monitors two wide x two tall.

Maximum Monitor Height	Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
18.1" (460 mm)	29" (736 mm)	±12°	10 - 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>

**K3G220** GROMMET MOUNTED 2x2 ARRAY

Static grommet array mount for monitors two wide x two tall. Compatible with desks 0.5 - 5" (13 - 127 mm) thick.

Maximum Monitor Height	Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
18.1" (460 mm)	29" (736 mm)	±12°	10 - 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>

**K3F310** FREESTANDING 3x1/2x1 ARRAY

Static freestanding array mount for two or three monitor/tablet combinations. Telescoping rails add 8" (203 mm) per arm of additional lateral adjustment.

Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 25.6" (65 cm) Triple display - 51.2" (130 cm)	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>



**K3G310** GROMMET MOUNTED 3x1/2x1 ARRAY

Static grommet array mount for two or three monitor/tablet combinations. Telescoping rails add 8" (203 mm) per arm of additional lateral adjustment.

Monitor Width Range	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 25.6" (65 cm) Triple display - 51.2" (130 cm)	Outer - 12° Center - 10°	Dual: up to 30" Triple: up to 27"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>

**K3F120** FREESTANDING 1x2 ARRAY


Static freestanding array mount for two monitors arranged vertically.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
18.1" (460 mm)	±10°	10 - 30"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>

**K3G120** GROMMET MOUNTED 1x2 ARRAY

Static grommet array mount for two monitors arranged vertically. Compatible with desks 0.5 - 5" (13 - 127 mm) thick.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
18.1" (460 mm)	±10°	10 - 30"	15 lbs (6.8 kg)	<b>S</b> <b>B</b>

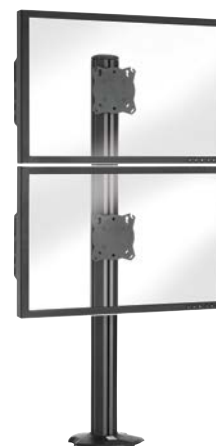

## KONTOUR™ K3 SERIES DESK ARRAY ACCESSORIES



KRA500	Compatibility
Desk Clamp Accessory	K3 Series Mounts



KSA1250	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1 Series)



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1 Series)

## KONTOUR™ K4 DEPTH-ADJUSTABLE DESK ARRAYS

### FEATURES



#### FOCAL DEPTH ADJUSTMENT

Provides articulating focal depth adjustment for optimal ergonomics in multi-user environments, allowing you to reposition the bank of screens to a preferred viewing distance.



#### AESTHETIC DESIGN

Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed, and snap-on cable management creates a clean appearance.



#### EXCEPTIONAL FLEXIBILITY

Swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

### K4G610 GROMMET MOUNTED 6x1 ARRAY



Grommet array mount for six monitors in a row with two anchor points.

Extends up to 16.2" (412 mm) and offers  $\pm 12$  degrees tilt.



Center of Display to Floor/Table Range	Max. Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	4.9" (126 mm)

### K4G510 GROMMET MOUNTED 5x1 ARRAY



Grommet array mount for five monitors in a row with two anchor points.

Extends up to 16.2" (412 mm) and offers  $\pm 12$  degrees tilt.



Center of Display to Floor/Table Range	Max. Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	4.9" (126 mm)

**K4G410** GROMMET MOUNTED 4x1 ARRAY

Grommet array mount for four monitors in a row with two anchor points.  
Extends up to 16.2" (412 mm) and offers  $\pm 12^\circ$  degrees tilt.



Center of Display to Floor/Table Range	Max. Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	4.9" (126 mm)

**K4G310** GROMMET MOUNTED 3x1 ARRAY

Grommet array mount for three monitors in a row with one anchor point.  
Extends up to 16.2" (412 mm) and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.



Center of Display to Floor/Table Range	Max. Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	24.2" (614 mm)	9.4" (239 mm)	up to 24"	15 lbs (6.8 kg)	4.9" (126 mm)

**K4G210** GROMMET MOUNTED 2x1 ARRAY

Grommet array mount for two monitors in a row with one anchor point.  
Extends up to 16.2" (412 mm) and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.



Center of Display to Floor/Table Range	Max. Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	37.1" (943 mm)	9.42" (239 mm)	up to 30"	15 lbs (6.8 kg)	4.9" (126 mm)

**K4G120** GROMMET MOUNTED 1x2 ARRAY

Grommet array mount for two monitors stacked with one anchor point.  
Offers  $\pm 10^\circ$  tilt and  $20^\circ$  rotation.



Center of Display to Floor/Table Range	Max. Monitor Height	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
11.5 - 18.2" (291 - 463 mm)	16" (406 mm)	9.4" (239 mm)	up to 30"	15 lbs (6.8 kg)	4.9" (126 mm)

## KONTOUR™ K4 SERIES DESK ARRAY ACCESSORIES



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1 Series)



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1 Series)



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products





## WALL MONITOR MOUNTS

### KONTOUR™ K1 SERIES WALL MOUNT FEATURES



#### HEAVY DUTY DESIGN

Features sleek and solid forged aluminum arms.



#### ULTIMATE FLEXIBILITY

Gas-spring technology provides smooth dynamic height adjustment up to 13" (330 mm) and enables ideal monitor positioning.



#### FAST INSTALLATION

Simple 3-step installation and integrated quick-connect interface for easy mounting and maintenance.



#### CABLE MANAGEMENT

Tool-free cable management covers create a clean, professional look.



#### CENTRIS® EXTREME TILT

Tilts +75°/-10° for an ultimate ergonomic solution.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA patterns.

## K1W220 DUAL MONITOR WALL MOUNT



Featuring flexible dual-link arms, this dynamic mount securely attaches two monitors.

Minimum Depth from Wall	Maximum Extension	Weight Capacity (per monitor)	Colors
2.5" (62 mm)	20.7" (525 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



## K1W22H DUAL MONITOR WALL ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible dual-link arm.

Minimum Depth from Wall	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
3.1" (79 mm)	20.8" (529 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>



## K1W120 SINGLE MONITOR WALL MOUNT



Dynamic mount securely attaches a single monitor. Features flexible dual-link arm.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
2.5" (62 mm)	20.2" (512 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>



**K1W110** SINGLE MONITOR WALL MOUNT

Dynamic mount with single-link arm securely attaches single monitor.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
2.5" (62 mm)	13.4" (341 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>

**K1S220** DUAL MONITOR SLAT WALL MOUNT

Featuring flexible dual-link arms, this dynamic mount securely attaches two monitors to slat wall. Ships with the OFBU universal slat wall interface bracket.

Minimum Depth from Wall	Maximum Extension	Weight Capacity (per monitor)	Colors
2.5" (62 mm)	21.8" (553 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>

**K1S120** SINGLE MONITOR SLAT WALL MOUNT

Dynamic mount features flexible dual-link arm that securely attaches a single monitor to slat wall. Ships with the OFBLU universal slat wall interface bracket.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
2.5" (62 mm)	20.1" (510 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>

**K1S22H** DUAL MONITOR SLAT WALL ARRAY

Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Features flexible dual-link arm.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
3.1" (79 mm)	21.4" (544 mm)	2 - 9 lbs (0.9 - 4.08 kg)	<b>S</b> <b>B</b>



## KONTOUR K1 SERIES WALL MOUNT ACCESSORIES



OFB-xxx	Compatibility
Office Furniture Interface Brackets	K1 and K2 Series Wall Mounts



OFBU	Compatibility	Colors
Universal Heavy-Duty Slat Wall Interface Bracket	K1 and K2 Series Wall Mounts	<b>S</b> <b>B</b>



OFBLU	Compatibility	Colors
Universal Low profile Slat Wall Interface Bracket	KOW100, K1W110 and K1W120	<b>S</b> <b>B</b>



KRA300	Compatibility
Laptop Accessory	K1 Series Mounts



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*



KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	K1 and K2 Series Mounts*



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1)



KRA400B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2B iPad interface



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA400B accessory with K1)



KRA401B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2TB iPad interface

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.

## KONTOUR™ K2 SERIES WALL MOUNT FEATURES



### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



### FAST INSTALLATION

Tear-drop hole pattern for easy mounting and maintenance.



### CENTRIS® TILT

Tilts  $\pm 15^\circ$  for a flexible ergonomic solution.




### CABLE MANAGEMENT

Tool-free cable guide clips for a clean, professional look.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



CENTRIS® TILT

## K2W220 DUAL MONITOR WALL MOUNT



Securely attaches two monitors to wall. Features dual-link arms for added flexibility.




Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity (per monitor)	Colors
2.9" (74 mm)	17.7" (450 mm)	25 lbs (11.3 kg)	<b>S</b> <b>B</b>

## K2W22H DUAL MONITOR WALL ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement.

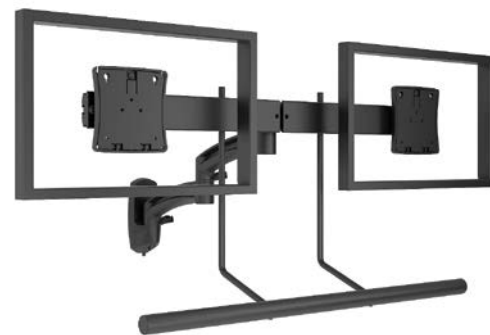

Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
3.1" (79 mm)	17.4" (441 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>

## K2W120 SINGLE MONITOR WALL MOUNT



Securely attaches a single monitor to the wall. Features a dual-link arm for added flexibility.

Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity	Colors
2.9" (74 mm)	17.2" (437 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>



## K2W110 SINGLE MONITOR WALL MOUNT



Securely attaches a monitor to the wall with a single-link arm.

Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity	Colors
2.9" (74 mm)	10.5" (265 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>



## KONTOUR™ K2 SERIES WALL MOUNT ACCESSORIES



OFB-xxx	Compatibility
Office Furniture Interface Brackets	K1 and K2 Series Wall Mounts



OFBU	Compatibility	Colors
Universal Heavy-Duty Slat Wall Interface Bracket	K1 and K2 Series Wall Mounts	<b>S</b> <b>B</b>




OFBLU	Compatibility	Colors
Universal Low profile Slat Wall Interface Bracket	KOW100, K1W110 and K1W120	<b>S</b> <b>B</b>



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1)



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1)

## OTHER KONTOUR™ WALL MOUNTS

### KOW100 PITCH/PIVOT SINGLE WALL MOUNT



Easily attaches a monitor to the wall and provides smooth pivot and tilt adjustment for optimal viewing.

Weight Capacity	Mounting Patterns (W,H)	Tilt	Minimum Depth from Wall	Typical Screen Size	Colors
25 lbs (11.3 kg)	75 x 75 mm, 100 x 100 mm	+75°, -10°	3.2" (81 mm)	10 - 30"	<b>S</b> <b>B</b>





## KONTOUR™ K4 SERIES WALL MOUNT FEATURES



### MODULARITY

An easily adjustable solution for monitor array workstations where multiple users need to reposition the bank of screens to their preferred viewing distance. Perfect for control rooms, trading desks, call centers, security desks, IT, healthcare and more.



### AESTHETIC DESIGN

Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed, and snap-on cable management creates a clean appearance.



### EXCEPTIONAL FLEXIBILITY

Provides articulating focal depth adjustment, swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

## K4W310 WALL MOUNTED 3x1 ARRAY



Wall array mount for three monitors in a row with one anchor point.



Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
24.2" (614 mm)	16.2" (412 mm)	9.4" (239 mm)	0 - 20°	up to 24"	±12°	15 lbs (6.8 kg)

## K4W210 WALL MOUNTED 2x1 ARRAY



Wall array mount for two monitors in a row with one anchor point.



Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
37.1" (943 mm)	16.2" (412 mm)	9.4" (239 mm)	0 - 20°	up to 30"	±12°	15 lbs (6.8 kg)

**K4W120** WALL MOUNTED 1x2 ARRAY

Wall array mount for two monitors stacked with one anchor point.

Offers  $\pm 10^\circ$  tilt and  $20^\circ$  rotation.

Maximum Monitor Height	Extension	Minimum Depth	Arm Rotation	Tilt	Weight Capacity (per monitor)
16" (406 mm)	16.2" (412 mm)	3.7" (94 mm)	0 - $20^\circ$	$\pm 10^\circ$	15 lbs (6.8 kg)



## KONTOUR™ K1 SERIES POLE MOUNT FEATURES



### EASY INSTALLATION

Simple 3-step installation and integrated quick-connect interface makes mounting and maintenance easy. Mounts on pre-existing poles with 1.5 - 1.9" (38 - 48 mm) outer diameters.



### CENTRIS® EXTREME TILT

Centris® technology provides effortless tilt up to +75°/-10°.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



### HEAVY DUTY DESIGN

Features sleek and solid forged aluminum arms.



### ULTIMATE FLEXIBILITY

Gas-spring technology provides smooth dynamic height adjustment enabling ideal monitor positioning.



### CABLE MANAGEMENT

Tool-free cable management covers create a clean, professional look.

## K1P220 DUAL MONITOR POLE MOUNT



Dynamic pole mount firmly holds two monitors. Flexible dual-link arms provide up to 13" (330 mm) of height adjustment.



Minimum Depth from Pole	Extension	Weight Capacity (per monitor)	Colors
2.5" (62 mm)	20.1" (510 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>

## K1P22H DUAL MONITOR POLE ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible dual-link arm provides up to 13" (330 mm) of height adjustment.



Minimum Depth from Pole	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
3.1" (79 mm)	17.4" (441 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>

**K1P120** SINGLE MONITOR POLE MOUNT

Flexible dual-link arm provides up to 13" (330 mm) of height adjustment.

Minimum Depth from Pole	Extension	Weight Capacity	Colors
2.5" (64 mm)	19.4" (493 mm)	5 - 25 lbs (2.3 - 11.3 kg)	<b>S</b> <b>B</b>

**K1P110** SINGLE MONITOR POLE MOUNT

Dynamic pole mount firmly holds a single monitor. Single-link arm provides up to 13" (330 mm) of height adjustment.

Minimum Depth from Pole	Maximum Extension	Weight Capacity	Colors
2.5" (64 mm)	12.7" (322 mm)	25 lbs (11.3 kg)	<b>S</b> <b>B</b>



## KONTOUR™ K1 SERIES POLE MOUNT ACCESSORIES



KRA300	Compatibility
Laptop Accessory	K1 Series Mounts



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	Kontour Series Mounts (requires KRA400B accessory with K1 Series)



KRA400B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2B iPad interface



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	Kontour Series Mounts (requires KRA401B accessory with K1 Series)



KRA401B	Compatibility
Weighted Adapter Plate	K1 Series Mounts + FSBI2TB iPad interface

## KONTOUR™ K2 SERIES POLE MOUNT

### FEATURES



#### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



#### CENTRIS® TILT

Centris® technology provides effortless tilt up to ±15 degrees.



#### CABLE MANAGEMENT

Includes tool-free cable management clips for a clean, professional look.



#### EASY INSTALLATION

Teardrop hole pattern makes mounting the screens quick and easy. Mounts on pre-existing poles with 1.5 - 1.9" (38 - 48 mm) outer diameters.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

### K2P220 DUAL MONITOR POLE MOUNT



Pole mount firmly holds two monitors. Dual-link arm offers added flexibility.




Minimum Depth from Pole	Maximum Extension	Weight Capacity (per monitor)	Colors
2.9" (74 mm)	17.1" (434 mm)	25 lbs (11.3 kg)	<b>S</b> <b>B</b>

### K2P22H DUAL MONITOR POLE ARRAY



Securely holds two monitors on an array bar allowing for perfect alignment and low-profile placement. Dual-link arm offers added flexibility.

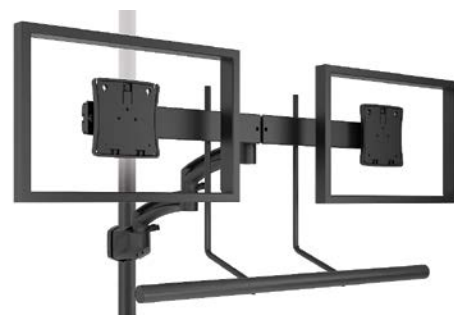

Minimum Depth from Pole	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
3.1" (79 mm)	16.8" (425 mm)	2 - 9 lbs (0.9 - 4.08 kg)	24.9" (632 mm)	<b>S</b> <b>B</b>

**K2P120** SINGLE MONITOR POLE MOUNT

Pole mount firmly holds a single monitor. Dual-link arm offers added flexibility.

Minimum Depth from Pole	Maximum Extension	Weight Capacity	Colors
2.9" (74 mm)	16.6" (422 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>

**K2P110** SINGLE DISPLAY POLE MOUNT

Pole mount with single-link arm firmly holds a single monitor.

Minimum Depth from Pole	Maximum Extension	Weight Capacity	Colors
2.9" (74 mm)	9.9" (250 mm)	40 lbs (18.14 kg)	<b>S</b> <b>B</b>





## KONTOUR™ K2 SERIES POLE MOUNT ACCESSORIES



FSBI2B	Compatibility
Portable iPad® Interface Bracket - iPad 2, and 3rd- & 4th-gen iPads	K1 Series Mounts (requires KRA400B accessory with K1 Series)



FSBI2TB	Compatibility
Secure iPad Interface Bracket - iPad 2 and 3rd-gen iPad	K1 Series Mounts (requires KRA401B accessory with K1 Series)



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products

## OTHER KONTOUR™ POLE MOUNTS

### KOP100 SINGLE MONITOR POLE MOUNT



Easily attaches a monitor to a pole and provides smooth pivot and tilt adjustment.

Column Diameter Range	Weight Capacity	Mounting Patterns (W,H)	Tilt	Min.Depth from Pole	Typical Screen Size	Colors
1.5 - 1.9" (38 - 48 mm)	25 lbs (11.3 kg)	75 x 75 mm, 100 x 100 mm	+75°, -10°	2.6" (66 mm)	10 - 30"	<b>S</b> <b>B</b>





## TABLET MOUNTS

### ALL-IN-ONE TABLET MOUNT FEATURES



#### COMPLETE SOLUTION

Simplify ordering and installation with these preconfigured kits. Each kit includes a Kontour™ mount and tablet interface bracket.



#### STABLE POSITIONING

Your tablet stays where you place it, creating a productive, ergonomic workspace or display.



#### SLEEK DESIGN

Features custom molded materials, minimalist design and durable functionality.

**KOW100BXi2B** PITCH/PIVOT FLUSH - PORTABLE

Allows for pan, tilt and portrait/landscape rotation of an iPad® 2, 3rd- or 4th-gen iPad. FSBi2B interface offers easy iPad® removal.

Dimensions (HxWxD)	Tilt	Weight Capacity
11.2 x 8.6 x 0.9" (286 x 217 x 24 mm)	+40° / -10°	2 lbs (0.9 kg)

**KOW100BXi2TB** PITCH/PIVOT FLUSH - SECURE

Allows for pan, tilt and portrait/landscape rotation of an iPad® 2 or 3rd-gen iPad with 30-pin connector. FSBi2TB interface deters theft.

Dimensions (HxWxD)	Tilt	Weight Capacity
11.2 x 8.6 x 0.9" (286 x 217 x 24 mm)	+40° / -10°	2 lbs (0.9 kg)

**FSRi2T** iPad FLUSH MOUNT

Great for boardroom or home control applications. Holds iPad® 2 or 3rd-gen iPad with 30-pin connector and includes security hardware for theft deterrence.

Dimensions	Weight Capacity	Colors
11.4 x 8.1" (290 x 206 mm)	2 lbs (0.9 kg)	<b>S</b> <b>B</b>



**K1D220BXi2B** DESK CLAMP - PORTABLE INTERFACE

Dynamic clamp mount with FSBi2B portable interface for an iPad® 2, 3rd- or 4th-gen iPad. Includes KRA400B weight plate adapter.

Maximum Extension	Minimum Depth	Tilt	Desktop Thickness	Weight Capacity (per monitor)
19.9" (506 mm)	2.1" (53 mm)	+75°, -10°	0.75 - 2.5" (19 - 64 mm)	5 - 25 lbs (2.3 - 11.3 kg)

**K1C120BXi2B** COLUMN CLAMP - PORTABLE INTERFACE

Column mount with FSBi2B portable interface for an iPad® 2, 3rd- or 4th-gen iPad. Includes KRA400B weight plate adapter.

Manual Height Adjustment	Minimum Depth	Tilt	Desktop Thickness	Weight Capacity
10.7" (273 mm)	2.1" (54 mm)	+75°, -10°	0.5 - 3.3" (13 - 83 mm)	5 - 25 lbs (2.3 - 11.3 kg)



# ONLINE TOOLS

## RACKBUILDER™

RackBuilder™ is Chief's intuitive web application for visually configuring rack solutions with an extensive library of accessories and third party component data. RackBuilder includes design-friendly capabilities such as photo realistic images, line views and side views of the rack design. Users can get a rack layout, parts list and pricing very quickly. Share cloud backed up rack projects with others for feedback and changes further enhances the online tool's usefulness. [rackbuilder.chiefmfg.com](http://rackbuilder.chiefmfg.com)



## RACKBUILDER DELIVERED FEATURES

### SIMPLY BUILD YOUR CUSTOM SOLUTION


Use our newly renovated RackBuilder web application. Indicate that you would like your rack delivered preloaded with accessories installed exactly where you want them. It's that easy.

### ORDERS ARE PROCESSED

Racks are preloaded and repackaged in Chief's warehouse, and shipped to you.

### THE END RESULT

Enjoy a seamless ordering process that saves you valuable installation time, and significantly reduces the amount of packaging to be disposed of or recycled.

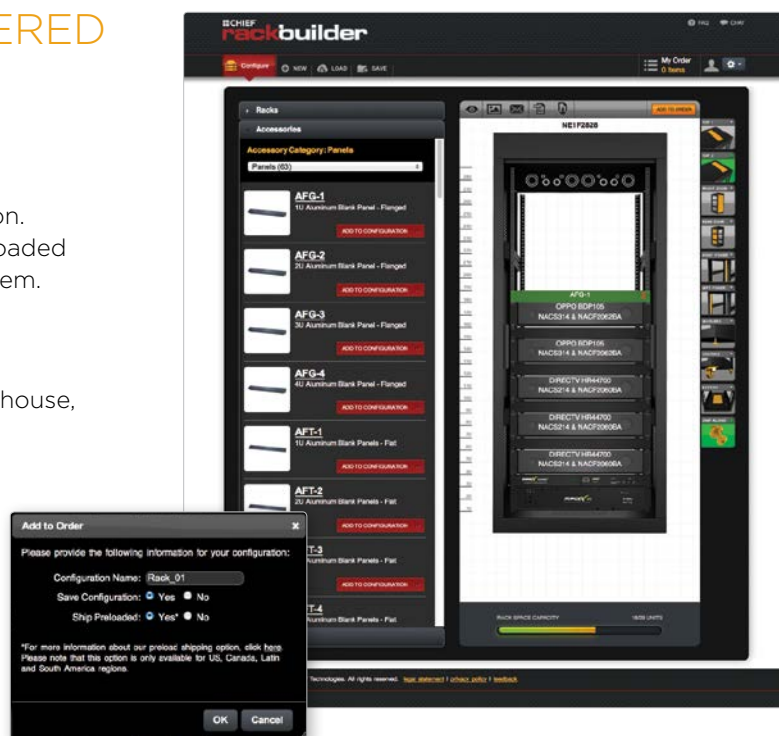

# S1 SERIES

## KNOCK DOWN RACKS

### NS1F Series 23" OR 28" DEPTHS

Rack rails can be field cut to length to shorten the rack if required by unexpected changes to the installation space. Includes floor levelers, 3U blanking/alignment panels, bottom vent panel and top 3U blanking panels. Casters, doors and side panels ordered separately.

### RAXXESS™ S1 SERIES

#### FEATURES

#### RACKBUILDER™

Customize this rack in RackBuilder to your exact specifications. Details on page 154.

#### KNOCK DOWN

The easiest-to-assemble knock down rack on the market.

#### INSTALLER-FRIENDLY

The rails are self-supported during assembly, which allows one person to easily construct the rack in less than five minutes.

#### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

#### CABLE MANAGEMENT

The side braces are punched to accept additional rack rails or can be used as a place to land cable ties. Conduit knockouts are laser cut in top and bottom of rack.



# S1 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NS1F1223	12 space	23" (584 mm)	22.6" (574 mm)	19.3" (489 mm)	28.5" (724 mm)	30" (762 mm)
NS1F1228		28" (711 mm)	27.6" (701 mm)			
NS1F2023	20 space	23" (584 mm)	22.6" (574 mm)		42.5" (107.9 cm)	44" (111 cm)
NS1F2028		28" (711 mm)	27.6" (701 mm)			
NS1F2823	28 space	23" (584 mm)	22.6" (574 mm)		56.5" (143.5 cm)	58" (147.3 cm)
NS1F2828		28" (711 mm)	27.6" (701 mm)			
NS1F3623	36 space	23" (584 mm)	22.6" (574 mm)		70.5" (179 cm)	72" (182.8 cm)
NS1F3628		28" (711 mm)	27.6" (701 mm)			
NS1F4123	41 space	23" (584 mm)	22.6" (574 mm)		79.2" (201 cm)	81" (205.7 cm)
NS1F4128		28" (711 mm)	27.6" (701 mm)			
NS1Fxx23*	Customizable	23" (584 mm)	22.6" (574 mm)		Customizable	Customizable
NS1Fxx28*		28" (711 mm)	27.6" (701 mm)			

\* Must be used with (qty 2) rack rail sets. Select RKRLxxSPACE rails 4U taller than desired height.

# S1 SERIES ACCESSORIES



S1 Steel Rack Door Options		
Model	Rack Height	Type
NS1D12S	12 space	Solid Steel
NS1D20S	20 space	Solid Steel
NS1D28S	28 space	Solid Steel
NS1D36S	36 space	Solid Steel
NS1D41S	41 space	Solid Steel



S1 Perforated Rack Door Options		
Model	Rack Height	Type
NS1D12F	12 space	Perforated Steel
NS1D20F	20 space	Perforated Steel
NS1D28F	28 space	Perforated Steel
NS1D36F	36 space	Perforated Steel
NS1D41F	41 space	Perforated Steel



S1 Plexi Rack Door Options		
Model	Rack Height	Type
NS1D12P	12 space	Plexi
NS1D20P	20 space	Plexi
NS1D28P	28 space	Plexi
NS1D36P	36 space	Plexi
NS1D41P	41 space	Plexi



NAGS1	
S1 Rack Ganging Kit	



S1 Rack Side Panel Pair Options		
Model	Rack Height	Rack Depth
NS1S1223	12 space	23" (584 mm)
NS1S1228	12 space	28" (711 mm)
NS1S2023	20 space	23" (584 mm)
NS1S2028	20 space	28" (711 mm)
NS1S2823	28 space	23" (584 mm)
NS1S2828	28 space	28" (711 mm)
NS1S3623	36 space	23" (584 mm)
NS1S3628	36 space	28" (711 mm)
NS1S4123	41 space	23" (584 mm)
NS1S4128	41 space	28" (711 mm)



S1 Zero Height Rack Shelf Options		
Model	Rack Height	Rack Depth
NASIS23	0 space	23" (584 mm)
NASIS28	0 space	28" (711 mm)

More universal rack accessories available on page 174.

# G1 SERIES GANGABLE RACKS

## ✓ **NG1F Series** 28" OR 33" DEPTHS

Rear rack rail is included for easy cable management. Floor levelers, casters, front and rear doors and side panels ordered separately.

## RAXXESS™ G1 SERIES FEATURES



### RACKBUILDER™ DELIVERED

Order this rack custom preloaded through RackBuilder™ Delivered. Details on page 154.

### HASSLE-FREE

Pre-welded ganging nuts and included hardware provide the ability to gang racks after components are loaded.

### SMART PACKAGING

Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.





# G1 SERIES

## RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NG1F2828	28 space	28" (711 mm)	24.5" (622 mm)	23.3" (522 mm)	56" (142.2 cm)	57.4" (145.8 cm)
NG1F2833		33" (838 mm)	29.5" (749 mm)			
NG1F3628	36 space	28" (711 mm)	24.5" (622 mm)		70" (177.8 cm)	71.4" (181.4 cm)
NG1F3633		33" (838 mm)	29.5" (749 mm)			
NG1F4428	44 space	28" (711 mm)	24.5" (622 mm)		84" (213.4 cm)	85.4" (216.9 cm)
NG1F4433		33" (838 mm)	29.5" (749 mm)			

# G1 SERIES

## ACCESSORIES



G1 Steel Rack Door (front or rear) Options		
Model	Rack Height	Type
NG1D28S	28 space	Solid Steel
NG1D36S	36 space	Solid Steel
NG1D44S	44 space	Solid Steel



G1 Perforated Steel Rack Door (front or rear) Options		
Model	Rack Height	Type
NG1D28F	28 space	Perforated Steel
NG1D36F	36 space	Perforated Steel
NG1D44F	44 space	Perforated Steel



G1 Plexi Rack Door (front or rear) Options		
Model	Rack Height	Type
NG1D28P	28 space	Plexi
NG1D36P	36 space	Plexi
NG1D44P	44 space	Plexi



G1 Steel Rack Side Panel Pair Options		
Model	Rack Height	Rack Depth
NG1S2828	28 space	28" (711 mm)
NG1S2833	28 space	33" (838 mm)
NG1S3628	36 space	28" (711 mm)
NG1S3633	36 space	33" (838 mm)
NG1S4428	44 space	28" (711 mm)
NG1S4433	44 space	33" (838 mm)

Accessories available to order preloaded via RackBuilder™ Delivered.

More universal rack accessories available on page 174.

# E1 SERIES ENCLOSED RACKS

## ✓ NE1F Series 23" OR 28" DEPTHS

Covered vented bottom panel provides additional space for mounting components, but can be easily removed for cable entry or filtered fan intake panel for cooling components. Shown with optional floor levelers installed. Floor levelers, casters and doors ordered separately.



## RAXXESS™ E1 SERIES FEATURES

### ✓ RACKBUILDER™ DELIVERED

Order this rack preloaded through RackBuilder™ Delivered. Details on page 154.

### CUSTOMIZABLE

Adjustable depth front and rear rack rails along with seal-able vent openings to quickly create the rack you need.

### SMART PACKAGING

Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

# E1 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NE1F2023	20 space	23" (584 mm)	20.25" (514 mm)	23.5" (597 mm)	42" (106.6 cm)	43.4" (110 cm)
NE1F2028		28" (711 mm)	25.25" (641 mm)			
NE1F2823	28 space	23" (584 mm)	20.25" (514 mm)		55.9" (141.9 cm)	57.4" (145.7 cm)
NE1F2828		28" (711 mm)	25.25" (641 mm)			
NE1F3623	36 space	23" (584 mm)	20.25" (514 mm)		69.9" (177.5 cm)	71.3" (181.1 cm)
NE1F3628		28" (711 mm)	25.25" (641 mm)			
NE1F4423	44 space	23" (584 mm)	20.25" (514 mm)		83.9" (213 cm)	85.3" (216.6 cm)
NE1F4428		28" (711 mm)	25.25" (641 mm)			

# E1 SERIES ACCESSORIES



E1 Steel Rack Door (front or rear) Options		
Model	Rack Height	Type
NE1D20S	20 space	Solid Steel
NE1D28S	28 space	Solid Steel
NE1D36S	36 space	Solid Steel
NE1D44S	44 space	Solid Steel



E1 Perforated Steel Rack Door (front or rear) Options		
Model	Rack Height	Type
NE1D20F	20 space	Perforated Steel
NE1D28F	28 space	Perforated Steel
NE1D36F	36 space	Perforated Steel
NE1D44F	44 space	Perforated Steel



E1 Plexi Rack Door (front or rear) Options		
Model	Rack Height	Type
NE1D20P	20 space	Plexi
NE1D28P	28 space	Plexi
NE1D36P	36 space	Plexi
NE1D44P	44 space	Plexi



Accessories available to order preloaded via RackBuilder™ Delivered.

More universal rack accessories available on page 174.

## RAXXESS™ F1 SERIES

### FEATURES



#### RACKBUILDER™ DELIVERED

Order this rack preloaded through RackBuilder™ Delivered. Details on page 154.

#### FULLY ASSEMBLED RACK

Ships with large 4" (101 mm) lockable casters that can be installed for easy maneuverability. Reversible swing front and rear doors add flexibility.

#### SLEEK AESTHETICS

Great solution for boardrooms and video conferencing with several available finishes (Black, Maple and Mahogany).

#### THERMAL MANAGEMENT

Two steel flanged blanking panels in the rear door are easily removed to accept any 3U fans or panels.

### ✓ YF1F Series 30" DEPTH

Steel frame core for strength, stability and to prevent caster tear-outs.

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters	Finish
YF1F1228B	12 space	30" (762 mm)	25.3" (642 mm)	26.6" (677 mm)	29.7" (754 mm)	34" (863 mm)	
YF1F1228M							
YF1F1228H							
YF1F2028B	20 space				43.7" (111 cm)	48" (121.9 cm)	
YF1F2028M							
YF1F2028H							
YF1F2828B	28 space				57.7" (146.5 cm)	62" (157.4 cm)	
YF1F2828M							
YF1F2828H							



## F1 SERIES

### ACCESSORY



YAMF1

F1 Rack Monitor Mount Arm



Accessories available to order preloaded via RackBuilder™ Delivered.

More universal rack accessories available on page 174.

# ROTATING & PULL-OUT RACKS

## RAXXESS™ ROTATING & PULL-OUT RACK FEATURES

### RACKBUILDER™

Customize this rack in RackBuilder to your exact specifications. Details on page 154.

### HEAVY DUTY DESIGN

Rated to carry up to 300 lbs (136 kg) of equipment. HD models allow for greater weight capacity.

### ACCESSIBLE

Pull out racks provide easy access to equipment and wiring when space is at a premium.

### CABLE MANAGEMENT

Included cable management system keeps wiring organized when the rack is pulled out for service.

### SAFETY

Bottom cover panel keeps the rack from being pulled out accidentally.

## ROTR PULL-OUT ROTATING RACK WITH 18.9" DEPTH

In-wall pull out rotating rack. Designed for flush cabinet door installations.

Assembly required.

Overall Depth	Usable Depth	Width
18.9" (480 mm)	18.4" (467 mm)	19.25" (489 mm)

Model	Rack Height	Height
ROTR-8	8 space	17.5" (445 mm)
ROTR-9	9 space	19.3" (489 mm)
ROTR-10	10 space	21" (533 mm)
ROTR-11	11 space	22.8" (578 mm)
ROTR-12	12 space	24.5" (622 mm)
ROTR-13	13 space	26.3" (667 mm)

Model	Rack Height	Height
ROTR-14	14 space	28" (711 mm)
ROTR-15	15 space	29.8" (756 mm)
ROTR-16	16 space	31.5" (800 mm)
ROTR-17	17 space	33.3" (845 mm)
ROTR-18	18 space	35" (889 mm)
ROTR-19	19 space	36.8" (934 mm)
ROTR-20	20 space	38.5" (978 mm)
ROTR-21	21 space	40.3" (102.2 cm)
ROTR-22	22 space	42" (106.7 cm)
ROTR-23	23 space	43.8" (111.1 cm)



Model	Rack Height	Height
ROTR-24	24 space	45.5" (115.6 cm)
ROTR-xx	Custom space	Order rack rail separately

## ROTR-XL PULL-OUT ROTATING RACK WITH 22.9" DEPTH

In-wall pull out rotating rack. Designed for recessed cabinet door installations. Assembly required.

Overall Depth	Usable Depth	Width
22.9" (582 mm)	18.4" (467 mm)	19.25" (489 mm)

Model	Rack Height	Height
ROTR-XL-8	8 space	17.5" (445 mm)
ROTR-XL-9	9 space	19.3" (489 mm)
ROTR-XL-10	10 space	21" (533 mm)
ROTR-XL-11	11 space	22.8" (578 mm)

Model	Rack Height	Height
ROTR-XL-12	12 space	24.5" (622 mm)
ROTR-XL-13	13 space	26.3" (667 mm)
ROTR-XL-14	14 space	28" (711 mm)
ROTR-XL-15	15 space	29.8" (756 mm)
ROTR-XL-16	16 space	31.5" (800 mm)
ROTR-XL-17	17 space	33.3" (845 mm)
ROTR-XL-18	18 space	35" (889 mm)
ROTR-XL-19	19 space	36.8" (934 mm)

Model	Rack Height	Height
ROTR-XL-20	20 space	38.5" (978 mm)
ROTR-XL-21	21 space	40.3" (102.2 cm)
ROTR-XL-22	22 space	42" (106.7 cm)
ROTR-XL-23	23 space	43.8" (111.1 cm)
ROTR-XL-24	24 space	45.5" (115.6 cm)
ROTR-XL-XX	Custom space	Order rack rail separately

## ROTR-HD 24U+ PULL-OUT ROTATING RACK WITH 23.5" DEPTH


In-wall pull out rack. Designed for heavy duty rack installations. Assembly required.

Overall Depth	Usable Depth	Width	Min. Sill Height*
23.5" (597 mm)	18.5" (470 mm)	19.25" (489 mm)	4" (102 mm)

\* Adjustable to 6" (152 mm) with included hardware.

Model	Rack Height	Height
ROTR-HD-24	24 space	48.4" (122.9 cm)
ROTR-HD-25	25 space	50.1" (127.3 cm)
ROTR-HD-26	26 space	51.9" (131.8 cm)
ROTR-HD-27	27 space	53.6" (136.1 cm)
ROTR-HD-28	28 space	55.4" (140.7 cm)
ROTR-HD-29	29 space	57.1" (145 cm)
ROTR-HD-30	30 space	58.9" (149.6 cm)

Model	Rack Height	Height
ROTR-HD-31	31 space	60.6" (154 cm)
ROTR-HD-32	32 space	62.4" (158.5 cm)
ROTR-HD-33	33 space	64.1" (162.8 cm)
ROTR-HD-34	34 space	65.9" (167.4 cm)
ROTR-HD-35	35 space	67.6" (171.7 cm)
ROTR-HD-36	36 space	69.4" (172.4 cm)
ROTR-HD-37	37 space	71.1" (176.3 cm)
ROTR-HD-38	38 space	72.9" (185.2 cm)
ROTR-HD-39	39 space	74.6" (189.5 cm)
ROTR-HD-40	40 space	76.4" (194.4 cm)
ROTR-HD-41	41 space	78.1" (198.4 cm)
ROTR-HD-42	42 space	79.9" (202.9 cm)
ROTR-HD-43	43 space	81.6" (207.3 cm)

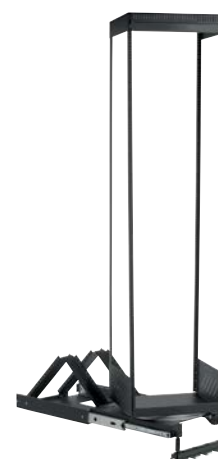

Model	Rack Height	Height
ROTR-HD-44	44 space	83.4" (211.8 cm)
ROTR-HD-xx	Custom space	Order rack rail separately

# ROTATING & PULL-OUT RACK ACCESSORIES



ROTRS	Compatibility
Racks Component Shelf	ROTR and ROTR-XL

More universal rack accessories available on page 174.

## RAXXESS™ ON-WALL RACK FEATURES



### RACKBUILDER™ DELIVERED

Order this rack preloaded through RackBuilder™ Delivered. Details on page 154.

### EASY INSTALLATION

Enclosed wall-mounted racks come with horizontal keyhole slots to make hanging the back panel simple.

### INCLUDED HARDWARE

Racks ship with all required hardware to mount to wood studs, steel studs or concrete.



### W2 Series FIXED WALL RACK

This fixed wall rack includes a reversible locking front door and a ventilated bottom panel. Steel flanged blanking panel at the top is easily removed to accept any 3U fan or panel. Weight capacity is 150 lbs (68 kg).

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
NW2F818	8 space	18.43" (468 mm)	18.11" (460 mm)	16.54" (420 mm)	22.12" (562 mm)
NW2F1218	12 space	25.43" (646 mm)			



### W1 Series HINGED WALL RACK

This hinged wall rack can be installed to swing to either side for easy access to cabling. Steel flanged blanking panel at the top is easily removed to accept any 3U fan or panel. Weight capacity is 300 lbs (136 kg). Solid, perforated or Plexi doors ordered separately.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
NW1F1218	12 space	28.85" (733 mm)	18" (457 mm)	16" (406 mm)	25.13" (638 mm)
NW1F1223			23" (584 mm)	21" (533 mm)	
NW1F2018	20 space	42.85" (109 cm)	18" (457 mm)	16" (406 mm)	
NW1F2023			23" (584 mm)	21" (533 mm)	
NW1F2818	28 space	56.85" (144 cm)	18" (457 mm)	16" (406 mm)	
NW1F2823			23" (584 mm)	21" (533 mm)	
NW1F2828			28" (711 mm)	26" (660 mm)	
NW1F3618	36 space	70.85" (180 cm)	18" (457 mm)	16" (406 mm)	
NW1F3623			23" (584 mm)	21" (533 mm)	
NW1F3628			28" (711 mm)	26" (660 mm)	





### SWR SECTIONAL WALL RACK

Sectional design allows access to rear of rack for cabling and maintenance. Doors and center rack section can be hinged to open in either direction, with shallower depth options than the W1 Series. Weight capacity is 150 lbs (68 kg). Solid, perforated or Plexi doors ordered separately.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
SWR-10-12	10 space	24.4" (620 mm)	15.5" (394 mm)	12" (305 mm)	22.25" (565 mm)
SWR-10-17			20.5" (521 mm)	17" (432 mm)	
SWR-18-12	18 space	38.4" (975 mm)	15.5" (394 mm)	12" (305 mm)	
SWR-18-17			20.5" (521 mm)	17" (432 mm)	
SWR-24-17	24 space	48.9" (124 cm)	20.5" (521 mm)	17" (432 mm)	



### RWM RELAY WALL RACK

A fixed wall rack that ships flat. Easy assembly in minutes. Weight capacity is 50 lbs (22.6 kg).

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
RWM-13-18	13 space	26.25" (667 mm)	18" (457 mm)	18" (457 mm)	19.4" (493 mm)
RWM-24-18	24 space	45.5" (115.6 cm)			
RWM-42-18	42 space	77" (195.6 cm)			



### RFM RELAY FLOOR RACK

Bolt-to-floor relay frame rack in three height options. Add RCM cable managers (shown in picture) to keep large bundles of cables organized.

Model	Rack Height	Height	Overall Depth	Width
RFM-24	24 space	47.5" (120.6 cm)	17" (432 mm)	19.4" (493 mm)
RFM-35	35 space	66.75" (169.5 cm)		
RFM-42	42 space	79" (200.6 cm)		



### PWR PIVOT WALL RACK

This pivoting wall rack rests on the floor and firmly attaches to the wall. Door can be hinged to open in either direction. Weight capacity is 300 lbs (136 kg). Solid, perforated or Plexi doors ordered separately.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
PWR-40-24	40 space	89" (226.1 cm)	23.25" (591 mm)	16.5" (419 mm)	22.87" (580 mm)



## ON-WALL RACK ACCESSORIES



W1 Sectional Wall Rack Door Options		
Model	Rack Height	Type
NW1D12S	12 space	Solid Steel
NW1D12F	12 space	Perforated Steel
NW1D12P	12 space	Plexi
NW1D20S	20 space	Solid Steel
NW1D20F	20 space	Perforated Steel
NW1D20P	20 space	Plexi
NW1D28S	28 space	Solid Steel
NW1D28F	28 space	Perforated Steel
NW1D28P	28 space	Plexi
NW1D36S	36 space	Solid Steel
NW1D36F	36 space	Perforated Steel
NW1D36P	36 space	Plexi



NAWS1	Weight Capacity
Wall Shelf with Wooden Sides	50 lbs (22.7 kg)



WMS	Compatibility
Steel Wall Mounted Shelf	Can also be used to wall hang ER-4, ER-6, ER-8, ER-10 and ER-12



RCM	Compatibility
RFM Cable Manager	RFM



PWR Rack Door Options		
Model	Rack Height	Type
PWRD-40	40 space	Solid Steel
PWRD-40P	40 space	Perforated Steel
PWRD-40PLX	40 space	Plexi



Accessories available to order preloaded via RackBuilder™ Delivered.

More universal rack accessories available on page 174.

# RAXXESS™ FREESTANDING RACK

## FEATURES

BACK TO BASICS  
Clean, efficient rack design for audio and video gear.

INSTALLER FRIENDLY  
Ships knocked down to assemble in minutes.

### ER ECONOMY RACK

An economical rack available in heights from 4 space to 20 space and 16" (403 mm) or 18" (454 mm) depths.

Model	Rack Height	Height	Overall Depth	Usable Depth	Overall Width
ER-4	4 space	8.6" (219 mm)	15.9" (403 mm)	15" (381 mm)	20.4" (772 mm)
ER-6	6 space	12.1" (308 mm)			
ER-8	8 space	15.6" (397 mm)			
ER-10	10 space	19.1" (486 mm)			
ER-12	12 space	22.6" (574 mm)			
ER-14	14 space	26.1" (664 mm)			
ER-16	16 space	29.6" (753 mm)			
ER-20	20 space	36.6" (930 mm)			
ER-8-18	8 space	15.6" (397 mm)	17.9" (454 mm)	17" (431 mm)	20.4" (772 mm)
ER-12-18	12 space	22.6" (574 mm)			
ER-16-18	16 space	29.6" (753 mm)			
ER-20-18	20 space	36.6" (930 mm)			



### ERS SLANTED ECONOMY RACK

Slanted racks make it convenient to easily see the equipment used.

Model	Rack Height	Height	Overall Depth (bottom)	Overall Depth (top)	Overall Width
ERS-10	10 space	20.4" (518 mm)	16.5" (419 mm)	12.5" (138 mm)	20.4" (772 mm)
ERS-18	18 space	38.8" (984 mm)	18" (457 mm)		
ER-12\8†	12 space (slanted) + 8 space (vertical)	39" (991 mm)	15.8" (400 mm)	8.6" (219 mm)	
ER-12\16†	12 space (slanted) + 16 space (vertical)	53" (134.6 cm)			

† Semi-slanted racks.





















## ERK ELITE RACK

Sectional design allows access to rear of rack for cabling and maintenance.

Doors can be hinged to open in either direction. Weight capacity is 150 lbs

(68 kg). All racks over 8 space include casters. Plexi front doors and solid rear doors can be ordered separately.

Model	Rack Height	Height	Height w/ Casters	Overall Depth	Usable Depth	Overall Width	Color
ERK-4-16M	4 space	9" (229 mm)	11.9" (302 mm)	16" (406 mm)	14" (356 mm)	20.4" (772 mm)	
ERK-4-16B							
ERK-8-20M	8 space	16.9" (429 mm)	19.8" (502 mm)	20" (508 mm)	18" (457 mm)		
ERK-8-20B							
ERK-12-20M	12 space	23.9" (606 mm)	26.8" (680 mm)				
ERK-12-20B							
ERK-16-20M	16 space	30.9" (784 mm)	33.8" (857 mm)				
ERK-16-20B							
ERK-20-20M	20 space	37.9" (962 mm)	40.8" (103.5 cm)				
ERK-20-20B							
ERK-12\8-20M†	12 space (slanted) + 8 space (vertical)	40.9" (103.8 cm)	43.6" (110.8 cm)				
ERK-12\8-20B†							
ERK-16-20MSL*	16 space	33.3" (845 mm)	36.1" (918 mm)				
ERK-16-20BSL*							
ERK-20-20MSL*	20 space	40.3" (102.2 cm)	43.1" (109.5 cm)				
ERK-20-20BSL*							
ERK-24-20MSL*	24 space	47.1" (119.7 cm)	50" (127 cm)				
ERK-24-20BSL*							

† Semi-slanted rack.

\* Slanted rack.



# FREESTANDING RACK ACCESSORIES



ER Plexi Economy Rack Door Options		
Model	Non Slanted Rack Height	Type
ERD-8	8 space	Plexi
ERD-12	12 space	Plexi
ERD-16	16 space	Plexi
ERD-20	20 space	Plexi



ER Perforated Economy Rack Door Options		
Model	Non Slanted Rack Height	Type
ERD-8P	8 space	Perforated Steel
ERD-12P	12 space	Perforated Steel
ERD-16P	16 space	Perforated Steel
ERD-20P	20 space	Perforated Steel



Solid Steel Security Door Options		
Mounts to rack rails and can be used to cover select RU location.		
Model	Non Slanted Rack Height	Type
SCDR-8	8 space	Solid Steel
SCDR-12	12 space	Solid Steel
SCDR-16	16 space	Solid Steel
SCDR-20	20 space	Solid Steel



S-10	Compatibility
ERS Swivel Base	ERS



ERK Rack Front Door Options		
Model	Rack Height	Type
ERKD-8	8 space	Plexi
ERKD-12	12 space	Plexi
ERKD-16	16 space	Plexi
ERKD-20	20 space	Plexi



ERK Rack Rear Door Options		
Model	Rack Height	Type
ERKD-8MR	8 space	Maple <b>M</b>
ERKD-8BR	8 space	Ebony <b>B</b>
ERKD-12MR	12 space	Maple <b>M</b>
ERKD-12BR	12 space	Ebony <b>B</b>
ERKD-16MR	16 space	Maple <b>M</b>
ERKD-16BR	16 space	Ebony <b>B</b>
ERKD-20MR	20 space	Maple <b>M</b>
ERKD-20BR	20 space	Ebony <b>B</b>



CASTER-ER/ERK	Compatibility
Casters	ER Racks, ERS Racks and ERK-4 and ERK-8

## RAXXESS™ ELITE CONVERTA RACK

### FEATURES

#### SECURITY

A locking Plexi front door and locking rear solid door are included. ECR-12\16ST includes locking steel front door.

#### MOBILITY

Smooth rolling casters make transporting equipment easy.

### ECR Series ELITE CONVERTA RACK & POP-UP MIXER

Converta rack that includes mixer pop-up rack on top. Available in walnut and cherry finishes.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Height with Casters	Color
ECR-10\10CH	10* + 10 space	31" (787 mm)	24" (609 mm)	18" (457 mm)	20.75" (527 mm)	31" (787 mm)	CH
ECR-10\10WT							WT
ECR-10\16CH	16* + 10 space	41.5" (105.4 cm)	24" (609 mm)	18" (457 mm)	20.75" (527 mm)	41.5" (105.4 cm)	CH
ECR-10\16WT							WT

\* Popup mixer spaces are 5" (127 mm) deep.



### ECR Series ELITE CONVERTA RACK & POP-UP MIXER

Steel construction Converta rack includes mixer pop-up rack on top. Optional pop-up side shelf accessory is also available.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Height with Casters	color
ECR-12\16ST	16* + 12 space	38.56" (979 mm)	27.5" (699 mm)	24" (610 mm)	22.13" (562 mm)	41.5" (105.4 cm)	S B

\* Mixer spaces are 5" (127 mm) deep.



# ELITE CONVERTA RACK

## ACCESSORIES



ECR-CH/SHELF
ECR Side Shelf for Elite Converta Rack, Cherry



ECR-WT/SHELF
ECR Side Shelf for Elite Converta Rack, Walnut



ECR-ST-SHELF
ECR Side Shelf for ECR-12\16ST



ECR-12\16STPS
ECR Podium Shelf for ECR-12\16ST

## RAXXESS™ ELITE ROLL TOP DESKS

### FEATURES

#### SECURE

Locking doors restrict access to equipment and wiring.

#### HIGHLY CUSTOMIZABLE

Fully assembled desks come with single or dual rack locations below and optional pull out shelf above.

### ERT Series ELITE ROLL TOP DESK

Secure locking roll top and locking doors keep equipment safe. Order with or without cutout for seating (wood versions only). Slide out rack and top pull out shelf available as optional accessories.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Height w/ Casters	Color
ERT-CH	14 + 14 space	39.5" (100 cm)	30" (762 mm)	23.5" (597 mm)	20.75" (527 mm)	41.4" (105 cm)	CH
ERT-CHSD	14 space & seating cutout						
ERT-WT	14 + 14 space						WT
ERT-WTSD	14 space & seating cutout						
ERT-ST	14 + 14 space						S



ERT-WTSD

### ELITE ROLL TOP DESK

#### ACCESSORIES



ERT-SLRKCH
ERT slide out rack, Cherry




ERT-SLRKWT
ERT slide out rack, Walnut




ERT pull out shelf	
Model	Finish
ERT-SHLFCH	Cherry
ERT-SHLFWT	Walnut
ERT-SHLFST	Black




# OTHER RAXXESS™ RACK ACCESSORIES




✓ NACF-
RackBuilder Delivered database continually updated to add new faceplates.




✓ NACS Custom Mounting Shelves		
Model	Rack Height	Depth
NACS214	2 space	14" (355 mm)
NACS218	2 space	18" (457 mm)
NACS314	3 space	14" (355 mm)
NACS318	3 space	18" (457 mm)
NACS414	4 space	14" (355 mm)
NACS418	4 space	18" (457 mm)
NACS514	5 space	14" (355 mm)
NACS518	5 space	18" (457 mm)
NACS614	6 space	14" (355 mm)
NACS618	6 space	18" (457 mm)




CMK-CBS Component Clamping Bars for Custom Mounting Shelves
Works with NACS selves to secure products in place. Includes soft foam protective strips.




NAB Branding Panel	Compatibility
Customized logo panel puts company information out front while preserving rack space.	Works in E1, G1, S1, W1 & W2 racks.



✓ FSK-B Aluminum Trim Strip	Contents
Can be cut in the field to cover screws and rack rail to dress up any installation. Two are required for racks taller than 20U.	Includes 25 screws, 25 snap washers and 8 end caps.




✓ UNS-1*	Rack Height	Depth
Universal Rack Shelf	1 space	10" (254 mm)




✓ UTS-1*	Rack Height	Depth
Utility Shelf	1 space	11" (279 mm)




Accessories available to order preloaded via RackBuilder™ Delivered.




✓ UTS-2*	Rack Height	Depth
Utility Shelf	2 space	14.5" (368 mm)




Shelf Multi-Pack Accessories		
Model	Type	Quantity
UNS-1-MP10	Punched shelf bottom	10 per pack
UTS-1-MP10	Solid steel	10 per pack
UTS-2-MP5	Solid steel	5 per pack




✓ UTS-3	Rack Height	Depth
Utility Shelf	3 space	14.5" (368 mm)




✓ UTS-4	Rack Height	Depth
Utility Shelf	4 space	14.5" (368 mm)




✓ UTVS-3-14	Rack Height	Depth
Vented Shelf	3 space	14" (355 mm)




✓ UTVS-3-18	Rack Height	Depth
Vented Shelf	3 space	18" (457 mm)



VCS-2	Rack Height	Depth
Cantilevered Shelf	2 space	18" (457 mm)



✓ WDS3-14	Rack Height	Depth
Wide Shelf	3 space	14" (355 mm)



✓ WDS3-18	Rack Height	Depth
Wide Shelf	3 space	18" (457 mm)

\* Also available in a multi-pack, see above.

## OTHER RAXXESS™ RACK ACCESSORIES



TR Trap Shelf		
Model	Rack Height	Depth
TR-2	2 space	14.5" (368 mm)
TR-3	3 space	14.5" (368 mm)
TR-4	4 space	14.5" (368 mm)



ATS-16-26	Rack Height	Depth	Weight Capacity
Adjustable Telescoping Shelf	1 space	16 - 26" (406 - 606 mm)	300 lbs (136 kg)



EXS Extendable Shelf		
Model	Usable Depth	Weight Capacity
EXS-2	21 - 28" (533-711 mm)	300 lbs (136 kg)
EXS-2-16	16 - 23" (406-584 mm)	300 lbs (136 kg)



SLE-1	Rack Height	Depth
Economy Sliding Shelf	1 space	13.75" (349 mm)



SLS-1	Rack Height	Depth
Sliding Shelf	1 space	14.25" (362 mm)



SLS-1.5	Rack Height	Depth
Sliding Shelf	2 space	14.5" (368 mm)



AFG Aluminum Flanged Panel		
Model	Rack Height	Type
AFG-1	1 space	Black Anodized Aluminum
AFG-1CL	1 space	Clear Anodized Aluminum
AFG-2	2 space	Black Anodized Aluminum
AFG-2CL	2 space	Clear Anodized Aluminum
AFG-3	3 space	Black Anodized Aluminum
AFG-3CL	3 space	Clear Anodized Aluminum
AFG-4	4 space	Black Anodized Aluminum
AFG-4CL	4 space	Clear Anodized Aluminum



Accessories available to order preloaded via RackBuilder™ Delivered.



AFT Aluminum Flat Panel		
Model	Rack Height	Type
AFT-1	1 space	Black Anodized Aluminum
AFT-1CL	1 space	Clear Anodized Aluminum
AFT-2	2 space	Black Anodized Aluminum
AFT-2CL	2 space	Clear Anodized Aluminum
AFT-3	3 space	Black Anodized Aluminum
AFT-3CL	3 space	Clear Anodized Aluminum
AFT-4	4 space	Black Anodized Aluminum
AFT-4CL	4 space	Clear Anodized Aluminum



EFG Economy Steel Flanged Panel		
Model	Rack Height	Type
EFG-1	1 space	Black Powder Coat
EFG-2	2 space	Black Powder Coat
EFG-3	3 space	Black Powder Coat
EFG-4	4 space	Black Powder Coat



EFT Economy Steel Flat Panel		
Model	Rack Height	Type
EFT-1	1 space	Black Powder Coat
EFT-2	2 space	Black Powder Coat
EFT-3	3 space	Black Powder Coat
EFT-4	4 space	Black Powder Coat



SFG Steel Flanged Panel		
Model	Rack Height	Type
SFG-1^	1 space	Black Wrinkle Coat
SFG-2^	2 space	Black Wrinkle Coat
SFG-3^	3 space	Black Wrinkle Coat
SFG-4^	4 space	Black Wrinkle Coat
SFG-5	5 space	Black Wrinkle Coat
SFG-6	6 space	Black Wrinkle Coat
SFG-7	7 space	Black Wrinkle Coat

^ Also available in a multi-pack, see next page.

# OTHER RAXXESS™ RACK ACCESSORIES



Accessories available to order preloaded via RackBuilder™ Delivered.



## SFT Steel Flat Panel

Model	Rack Height	Type
SFT-1^	1 space	Black Wrinkle Coat
SFT-2^	2 space	Black Wrinkle Coat
SFT-3^	3 space	Black Wrinkle Coat
SFT-4^	4 space	Black Wrinkle Coat
SFT-5	5 space	Black Wrinkle Coat
SFT-6	6 space	Black Wrinkle Coat
SFT-7	7 space	Black Wrinkle Coat



## EVP Economy Vent Panel

Model	Rack Height	Type
EVP-1^	1 space	Black Powder Coat
EVP-2^	2 space	Black Powder Coat
EVP-3^	3 space	Black Powder Coat



## Panel Multi-Pack Accessories

Model	Quantity	Model	Quantity
SFG-1-MPIO	10 per pack	SFT-2-MPIO	10 per pack
SFG-2-MPIO	10 per pack	SFT-3-MPIO	10 per pack
SFG-3-MPIO	10 per pack	SFT-4-MPIO	10 per pack
SFG-4-MPIO	10 per pack	EVP-1-MPIO	10 per pack
SFT-1-MPIO	10 per pack	EVP-2-MPIO	10 per pack
SFT-2-MPIO	10 per pack	EVP-3-MPIO	10 per pack
SFT-3-MPIO	10 per pack		



## AVP Aluminum Vent Panel

Model	Rack Height	Type
AVP-1	1 space	Black Anodized Aluminum
AVP-2	2 space	Black Anodized Aluminum
AVP-3	3 space	Black Anodized Aluminum
AVP-4	4 space	Black Anodized Aluminum



## FVP Fine Perforated Vent Panel

Model	Rack Height	Type
FVP-1	1 space	Black Powder Coat
FVP-2	2 space	Black Powder Coat
FVP-3	3 space	Black Powder Coat
FVP-4	4 space	Black Powder Coat



## PVP Perforated Vent Panel

Model	Rack Height	Type
PVP-1	1 space	Black Powder Coat
PVP-2	2 space	Black Powder Coat
PVP-3	3 space	Black Powder Coat
PVP-4	4 space	Black Powder Coat



## HVP Hinged Vent Panel

Model	Rack Height	Type
HVP-2	2 space	Black Powder Coat
HVP-3	3 space	Black Powder Coat
HVP-4	4 space	Black Powder Coat
HVP-6	6 space	Black Powder Coat



## LSC Locking Security Cover

Model	Rack Height	Type
LSC-2	2 space	Solid Steel
LSCP-2	2 space	Plexi
LSCF-2	2 space	Perf Panels
LSC-4	4 space	Solid Steel
LSCP-4	4 space	Plexi
LSCF-4	4 space	Perf Panels
LSC-8	8 space	Solid Steel
LSCP-8	8 space	Plexi
LSCF-8	8 space	Perf Panels



## PSC Fine Perforated Steel Security Cover

Model	Rack Height	Type
PSC-1	1 space	Black Powder Coat
PSC-2	2 space	Black Powder Coat
PSC-3	3 space	Black Powder Coat



## SEC Perforated Security Cover

Model	Rack Height	Type
SEC-1	1 space	Black Powder Coat
SEC-2	2 space	Black Powder Coat
SEC-3	3 space	Black Powder Coat

^ Also available in a multi-pack.

## OTHER RAXXESS™ RACK ACCESSORIES



### ESD Economy Sliding Drawers

Model	Rack Height	Locking	Type
ESD-2	2 space	No	Black Powder Coat
ESD-2-L	2 space	Yes	Black Powder Coat
ESD-3	3 space	No	Black Powder Coat
ESD-3-L	3 space	Yes	Black Powder Coat
ESD-4	4 space	No	Black Powder Coat
ESD-4-L	4 space	Yes	Black Powder Coat



### FSD Locking Sliding Drawer

Model	Rack Height	Type
FSD-2	2 space	Black Powder Coat
FSD-2A	2 space	Black Anodized Aluminum
FSD-2ACL	2 space	Clear Anodized Aluminum
FSD-3	3 space	Black Powder Coat
FSD-3A	3 space	Black Anodized Aluminum
FSD-3ACL	3 space	Clear Anodized Aluminum
FSD-4	4 space	Black Powder Coat
FSD-4A	4 space	Black Anodized Aluminum
FSD-4ACL	4 space	Clear Anodized Aluminum
FSD-8	8 space	Black Powder Coat
FSD-8A	8 space	Black Anodized Aluminum

FSD-8-FH	Compatibility
File Hanging Kit	FSD-8, FSD-8A



DL	Compatibility
Foam Drawer Liners	ESD, SDR and FSD



FDI	Compatibility
Foam Drawer Inserts	ESD, SDR and FSD
Model	Rack Height
FDI-2	2 space
FDI-3	3 space
FDI-4	4 space



LOCK	Compatibility
Drawer Lock	ESD, SDR



Accessories available to order preloaded via RackBuilder™ Delivered.



CDP	Compatibility
CD Partition	ESD-3, ESD-4



DVDP	Compatibility
DVD Partition	SDR, ESD-3, ESD-4




FL	Compatibility
Floor Levelers	Compatibility E1, G1, (S1 ships with floor levelers)



NAC25H	Compatibility
Heavy Duty Casters	E1, G1, S1



	PTSW-(X)
Rack Screws	
Model	Quantity
PTSW25	Package of 25
PTSW50	Package of 50
PTSW100	Package of 100
PTSW500	Reuseable bucket of 500



PNTX-(X)	Compatibility
Security Screws	All Racks
Model	Quantity
PNTX-25	Package of 25, includes one security bit
PNTX-50	Package of 50, includes one security bit
PNTX-100	Package of 100, includes one security bit
PNTX-B	Extra Security Screw Bit




STSW-25	Quantity
Stainless Steel Screws	25 per package


NATPBW	Color
Touch up paint	Black Wrinkle

NATPBS	Color
Touch up paint	Black Smooth


# OTHER RAXXESS™ RACK ACCESSORIES




NALRBW	Compatibility
Rack Light	Included 12VDC power supply accepts 120/240 and 50/60Hz




TB	
Horizontal tie bars for organizing cables	
Model	Description
TBA	1" (25 mm) Wide Aluminum
TBL	0.5" L-Shaped
TBLO	4" (102 mm) Offset L-Shaped
TBS	0.25" (6 mm) Round Rod
TBO	4" (102 mm) Offset Round Rod



LCS Cable Lacing Strips		
Vertical lacing strips can be field cut to size		
Model	Width	Length
LCS	2" (50.8 mm)	77" (196 cm)
LCS-1	1" (24.4 mm)	77" (196 cm)

A black, cylindrical brush grommet with a textured surface.

The NAG logo, featuring a stylized 'N' and 'A' in blue and orange.

## NAG Brush Grommet

Model


Rack Height

NAG1BW


1 space

NAG2BW

2 space




CT	
Nylon zip ties in packs of 100	
Model	Length
CT-100-4	4" (102 mm)
CT-100-8	8" (203 mm)
CT-100-12	12" (305 mm)
CT-100-15	15" (381 mm)
CT-100-8R	8" (203 mm) reusable




CBLD
Cable Depot




Accessories available to order preloaded via RackBuilder™ Delivered.




CMP-1C	Rack Height
Large Loop Cable Management Panel	1 space




CMP-1M	Rack Height
Small Loop Cable Management Panel	1 space




NAXQ20	Rack Height	Outlets	Amps
Sequencer	2 space	14	20A




NAXS			
Surge Eliminator			
Model	Rack Height	Outlets	Amps
NAXS15	1 space	9	15A
NAXS20	2 space	14	20A



NAXS-RT			
Surge Eliminator with Remote			
Model	Rack Height	Outlets	Amps
NAXS15RT	1 space	9	15A
NAXS20RT	1 space	9	20A



NAXS-IP			
Surge Eliminator with iControl Ethernet Web Interface			
Model	Rack Height	Outlets	Amps
NAXS15IP	1 space	9	15A
NAXS20IP	1 space	9	20A



NAXS-BM	Compatibility	
Surge Eliminator Bottom Mount with Remote	E1, F1, G1, S1 racks only	
Model	Outlets	Amps
NAXS15BM	9	15A
NAXS20BM	9	20A

## OTHER RAXXESS™ RACK ACCESSORIES



Accessories available to order preloaded via RackBuilder™ Delivered.



	NAXU15	Rack Height
	Surge UPS	2 space



	NAPDH11	Rack Height
	Power Distribution	1 space



	NAPDH11L	Rack Height
	Power Distribution with pull-out LED lights	1 space



	NAPDV		
	Removable IEC Cord Power Strip Includes Mounting Hardware		
Model	Outlets	Amps	
NAPDV0615PC	6	15A	
NAPDV0620PC	6	20A	
NAPDV1215PC	12	15A	
NAPDV1220PC	12	20A	
NAPDV1815PC	18	15A	
NAPDV1820PC	18	20A	
NAPDV2415PC	24	15A	
NAPDV2420PC	24	20A	



	NAPDV		
	Dual Circuit Power Strip with J-Box and Pigtails		
Model	Outlets	Amps	
NAPDV06152	6	15A	
NAPDV06202	6	20A	
NAPDV12152	12	15A	
NAPDV12202	12	20A	
NAPDV18152	18	15A	
NAPDV18202	18	20A	
NAPDV24152	24	15A	
NAPDV24202	24	20A	



	NAF15BA	Rack Height	Description	Type
	Fan Panel	1U	Intake fan panel for front rail installation	Quiet



	NAFT85	Description
	Thermostat Control	Turns on at 85° F (29° C) off at 75° F (24° C). Includes universal power supply to run two fans.



	NAFB2BW	Description	Compatibility
	Filtered Fan Panel	Draws cool filtered air into rack from bottom	E1, F1, G1, S1 racks



	NAV8B	Quantity	Compatibility
	Vent Block Kit	8	E1, W1, W2, SWR



	NAF Exhaust Fan Panel - Black Anodized			
Model	Rack Height	Fans	Type	
NAF31HBA	3 space	1	High Output	
NAF32HBA	3 space	2	High Output	
NAF33HBA	3 space	3	High Output	
NAF31QBA	3 space	1	Quiet	
NAF32QBA	3 space	2	Quiet	
NAF33QBA	3 space	3	Quiet	

# OTHER RAXXESS™ RACK ACCESSORIES



CLS-A	Includes	Size
Variable Speed Fan Kit	2 low voltage fans	Fits 3" (76 mm) opening



CLS-P	Size
Passive Louvered Vent	Fits 3" (76 mm) opening



NAM1F	Rack Height	Mounting Patterns (WxH)	Weight Capacity
Fixed Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 200 x 100 mm	40 lbs (18 kg)



NAM1T	Rack Height	Mounting Patterns (WxH)	Weight Capacity
Tilt Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	40 lbs (18 kg)



NAM1A	Rack Height	Mounting Patterns (WxH)	Weight Capacity
Articulating Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	40 lbs (18 kg)



Pull-Out iPod® Docks		
Includes iPod Dock, Multi-Function Remote Control, 120V/240V Power Supply, Zip Ties, Audio, Video and USB Cables		
Model	Rack Height	Color
NAID1B	1 space	<b>B</b>
NAID4B	4 space	<b>B</b>



NADBW	Size
Document Holder	Holds documents up to 8.5 x 11" (216 x 279 mm)



Accessories available to order preloaded via RackBuilder™ Delivered.



PB Project Box		
Model	Rack Height	Color
PB-1	1 space	<b>B</b>
PB-2	2 space	<b>B</b>



RKV Rack Vault		
Model	Rack Height	Color
RKV-3	3 space	<b>B</b>
RKV-4	4 space	<b>B</b>



DCR Decora® Mounting Panel			
Model	Rack Height	Devices Held	Orientation
DCR-1x1	1 space	1	horizontal
DCR-1x2	1 space	2	horizontal
DCR-1x3	1 space	3	horizontal
DCR-1x4	1 space	4	horizontal
DCR-3x3	3 space	3	vertical
DCR-3x4	3 space	4	vertical
DCR-3x6	3 space	6	vertical



EKO-3	Rack Height
Electrical Knockout Panel for Conduit Connectors	3 space



Specialty Panel		
Model	Description	Rack Height
S12F	12 Female XLR	1 space
S12H	6 Female and 6 Male XLR	1 space
S12M	12 Male XLR	1 space
S16.25	16 1/4" Phone	1 space
S16U	16 Male or Female XLR	1 space

\*May require more than 4 spaces depending on size of monitor used.

## OTHER RAXXESS™ RACK ACCESSORIES



ERSS Pair of Economy Speaker Stand			
Model	Height	Base Size	Color
ERSS-36	36" (91 cm)	12" (305 mm)	<b>B</b>
ERSS-42	42" (107 cm)	12" (305 mm)	<b>B</b>



ESS Pair of Elite Speaker Stand			
Model	Height	Base Size	Color
ESS-42BSL	42" (107 cm)	14" (356 mm)	<b>B</b>
ESS-42MSL	42" (107 cm)	14" (356 mm)	<b>M</b>



POMT Pop Filter With Gooseneck	
Model	Diameter
POMT	6" (152 mm)
POMT-8	8" (203 mm)



STOP Pop Filter (Attaches to Microphone Stand)	
Model	Diameter
STOP-6	6" (152 mm)
STOP-8	8" (203 mm)



HH Headphone Hanger		
Model	Type	Description
HH-1	Straight	Replace a rack screw with hanger to keep headphones close
HH-2	Right Angle	



RSG Round Speaker Grill	
Model	Diameter
RSG-8	8" (203 mm)
RSG-10	10" (203 mm)
RSG-12	12" (305 mm)
RSG-15	15" (381 mm)
RSG-18	18" (457 mm)



CKW	Compatibility
Clamp Kit (Set of 4)	For use with RSG Speaker Grills



AMS Attachable Music Stand Options		
Model	Dimensions (H,W)	Description
AMSL	9.75 x 7.5" (248 x 191 mm)	Attach to any microphone stand
AMSS	5 x 7.5" (127 x 191 mm)	



AR-5	Dimensions (H,W,D)
Riser for Amp Handle or Mic Stand	3 x 5 x 5" (76 x 127 x 127 mm)



# OTHER RAXXESS™ RACK ACCESSORIES



RKRLxxSPACE Rack Rail Options	
Model	Rack Height
RKRL1SPACE	1 space rack rail - per pair
RKRL2SPACE	2 space rack rail - per pair
RKRL3SPACE	3 space rack rail - per pair
RKRL4SPACE	4 space rack rail - per pair
RKRL5SPACE	5 space rack rail - per pair
RKRL6SPACE	6 space rack rail - per pair
RKRL7SPACE	7 space rack rail - per pair
RKRL8SPACE	8 space rack rail - per pair
RKRL9SPACE	9 space rack rail - per pair
RKRL10SPACE	10 space rack rail - per pair
RKRL11SPACE	11 space rack rail - per pair
RKRL12SPACE	12 space rack rail - per pair
RKRL13SPACE	13 space rack rail - per pair
RKRL14SPACE	14 space rack rail - per pair
RKRL15SPACE	15 space rack rail - per pair
RKRL16SPACE	16 space rack rail - per pair
RKRL17SPACE	17 space rack rail - per pair
RKRL18SPACE	18 space rack rail - per pair
RKRL19SPACE	19 space rack rail - per pair
RKRL20SPACE	20 space rack rail - per pair
RKRL21SPACE	21 space rack rail - per pair
RKRL22SPACE	22 space rack rail - per pair
RKRL23SPACE	23 space rack rail - per pair
RKRL24SPACE	24 space rack rail - per pair
RKRL25SPACE	25 space rack rail - per pair
RKRL26SPACE	26 space rack rail - per pair
RKRL27SPACE	27 space rack rail - per pair
RKRL28SPACE	28 space rack rail - per pair
RKRL29SPACE	29 space rack rail - per pair
RKRL30SPACE	30 space rack rail - per pair
RKRL31SPACE	31 space rack rail - per pair
RKRL32SPACE	32 space rack rail - per pair
RKRL33SPACE	33 space rack rail - per pair
RKRL34SPACE	34 space rack rail - per pair
RKRL35SPACE	35 space rack rail - per pair
RKRL36SPACE	36 space rack rail - per pair
RKRL37SPACE	37 space rack rail - per pair
RKRL38SPACE	38 space rack rail - per pair
RKRL39SPACE	39 space rack rail - per pair
RKRL40SPACE	40 space rack rail - per pair
RKRL41SPACE	41 space rack rail - per pair
RKRL42SPACE	42 space rack rail - per pair
RKRL43SPACE	43 space rack rail - per pair
RKRL44SPACE	44 space rack rail - per pair
RKRL45SPACE	45 space rack rail - per pair

# INDEX

## 2014 CHIEF CATALOG

### A

AFG	175
AFT	175
AMS ATTACHABLE MUSIC STAND OPTIONS	
	181
ANI	45
ANICA1	46
AR-5	181
ASP401	34
ATS-16-26	175
AVP	176

### C

CASTER-ER	170
CASTER-ERK	170
CBLD	178
CDP	177
CKW	181
CLS-A	180
CLS-P	180
CM2C40	96
CM2L40	112
CMA100	29, 93, 103
CMA100S	103
CMA100W	103
CMA101	27, 92, 101
CMA101S	101
CMA101W	101
CMA105	27, 92, 101
CMA106	29
CMA110	27, 92, 101
CMA115	27, 92, 101
CMA115S	101
CMA115W	101
CMA151	29
CMA152	29, 93, 103
CMA160	30
CMA170	29
CMA250	31
CMA270	29, 94, 103
CMA273	29, 94, 103
CMA274	28, 94, 103
CMA275	94, 103
CMA278	29, 94, 103
CMA290	28
CMA330	27, 92, 102
CMA345	27, 92, 102
CMA347	27
CMA351	29, 93, 103
CMA360	27, 92, 102
CMA362	27
CMA365	27, 92, 102
CMA366	27
CMA395	23, 25, 27, 92, 102
CMA395W	102
CMA440	27
CMA450	28, 92, 102
CMA455	25, 28, 93, 102
CMA470	22, 28
CMA471	28
CMA472	28
CMA473	28

CMA480	29
CMA502	29, 93, 103
CMA504	29, 93, 103
CMA640	29, 94, 103
CMA640B	103
CMA640W	103
CMA643	29, 94, 103
CMA700	29, 93, 102
CMK-CBS	174
CMP-1C	178
CMP-1M	178
CMS003	22, 23, 25, 28
CMS006	28
CMS009	28
CMS012	28
CMS018	28
CMS024	28
CMS036	28
CMS048	28
CMS060	28
CMS072	28
CMS115	23, 27, 92
CMS0203	28
CMS261	29, 93, 103
CMS261S	103
CMS261W	103
CMS0305	23, 28
CMS390	27, 92, 102
CMS391	27, 92, 102
CMS0406	28
CMS440	22, 23, 25, 27
CMS440P	27
CMS445	28
CMS445P	28
CMS490	28
CMS495	27
CMS0507	28
CMS0608	28
CMS0709	28
CMS0810	28
CMS0911	28
CMS1012	28
CMS006009	28
CMS009012	28
CMS012018	28
CMS018024	25, 28
CMS ADJUSTABLE COLUMNS	
	28, 93, 102
CMS FIXED COLUMNS	
	28, 93, 102
CMSH3	29, 40, 103
CMSH3S	40, 103
CMSI	31
CMSZ006	22, 23, 28
CPA262	95
CPA263	95
CPA264	95
CPA330	95
CPA365	95
CPA395	95
CPA COLUMNS	95
CT	178

### D

DCR DECORA® MOUNTING PANEL	
	180
DL	177
DVDP	177

### E

ECR-10	171
ECR-12	171
ECR-12\16STPS	172
ECR-CH/SHELF	172
ECR-ST-SHELF	172
ECR-WT/SHELF	172
EFG	175
EFT	175
EKO-3	180
ER	168
ERD	170
ERK	169
ERKD	170
ERS	168
ERSS	181
ERT	173
ERT-SHLF	173
ERT-SLRKCH	173
ERT-SLRKWT	173
ESD	177
ESS	181
EVP	176
EXS-2	175
EXS-2-16	175

### F

FCA2X1U	108
FCA3U	91, 100
FCA3X1U	108
FCA4U	91, 100
FCA100	50, 61, 72
FCA101	50, 61, 72
FCA102	50, 61, 72
FCA103	50, 61
FCA104	50, 61, 72
FCA500	91, 108, 111
FCA501	91, 108, 111
FCA502	91, 108, 111
FCA503	91, 108, 111
FCA510	91, 108, 111
FCA515	91, 108, 111
FCA520	91, 108, 111
FCA530	91, 108, 111
FCA535	91, 108, 111
FCA540	91, 108, 111
FCA611	111
FCA612	111
FCA623	111
FCA650	111
FCA651	111
FCA776	108
FCABX18	108
FCABX36	108
FCAC	91
FCACLIPS	91, 108, 111

## INDEX

## 2014 CHIEF CATALOG

FCAX08	91, 108
FCAX14	91, 108
FCAX20	91, 108
FCC100	50, 61
FCD100	50, 61, 72
FCK000	50, 61
FCK008	50, 61
FCK016	50, 61
FCS100	50, 61, 72
FDI	177
FHS	99
FL	177
FLR100	50, 61
FSB4090B	128
FSBI2B	125, 128, 132, 135, 139, 142, 147, 150
FSBI2TB	125, 128, 132, 135, 139, 142, 147, 150
FSD	177
FSD-8-FH	177
FSK-B	174
FSR	55
FSRI2T	152
FTR	66
FVP	176
FVS100	50, 61, 72
FVS150	50, 61, 72
FVS200	50, 61, 72
FVS250	50, 61, 72
FVS251	50, 61, 72
FVS300	50, 61
FVS350	50, 61

## H

HCI	30
HH HEADPHONE HANGER	181
HVP	176

## I

IR10	34, 101, 117
------	--------------

## J

JHS	98
JPP	99

## K

KOP100	150
KOW100	142
KOW100BXI2B	152
KOW100BXI2TB	152
KIC22H	122
KIC110	123
KIC120	123
KIC120BXI2B	153
KIC210	122
KIC220	122
KID22H	124
KID120	124
KID220	123
KID220BXI2B	153
KIP22H	145
KIP120	146
KIP220	145
KIS22H	138
KIS120	138

KIS220	138
KIW22H	137
KIW110	138
KIW120	137
KIW220	137
K2C22H	126
K2C110	127
K2C120	127
K2C220	126
K2P22H	148
K2P110	149
K2P120	149
K2P220	148
K2W22H	140
K2W110	141
K2W120	141
K2W220	140
K3F120	131
K3F220	130
K3F310	130
K3G120	131
K3G220	130
K3G310	131
K4G120	134
K4G210	134
K4G310	134
K4G410	134
K4G510	133
K4G610	133
K4W120	144
K4W210	143
K4W310	143
KFA220B	117
KFA220S	117
KFA225B	117
KFA225S	117
KFA320B	117
KFA320S	117
KFA325B	117
KFA325S	117
KITAB003	25
KITAS003	25
KITES003	22
KITES003P	22
KITEZ006	22
KITMA0305	23
KITMD003	23
KITMZ006	23
KITPA018024	25
KITPS003	25
KRA219	125, 128, 139
KRA220	125, 128, 139
KRA223	125, 128, 139
KRA224	125, 128, 139
KRA225	125, 128
KRA300	125, 139, 147
KRA400B	125, 139, 147
KRA401B	125, 139, 147
KRA500	132
KSA1005B	101
KSA1005S	101
KSA1021	101
KSA1250	132
KSA1250B	125, 128, 135, 139, 142, 147, 150

## L

LBM2X2U	107
LBM2X2UP	107
LBM3X1UP	106
LBM3X2U	106
LBM3X2UP	106
LBM3X3U	105
LC1	30
LCB1U	88
LCB1UP	88
LCB1X2U	89
LCB2X1U	85
LCB2X1UP	85
LCB3X1U	84
LCB3X1UP	84
LCD2C	30
LCD2TS	30
LCDA	26
LCDB	31
LCDCP	31
LCDPA	31
LCMIU	87
LCMIUP	88
LCM1X2U	89
LCM2X1U	84
LCM2X1UP	85
LCM2X2U	82
LCM2X2UP	82
LCM3U	89
LCM3X1U	83
LCM3X1UP	83
LCM3X2U	81
LCM3X2UP	81
LCM3X3U	81
LCM4U	89
LCS	178
LFAU	110
LOCK	177
LPAU	110
LPK1	31
LSAU	48
LSB100	30
LSB101	30
LSC	176
LSMU	48
LSMVPU	70
LSMVU	70
LSTU	52
LTAU	59
LTMPU	59
LTMU	59
LTU	63
LVM2X2U	107
LVM2X2UP	107
LVM3X1UP	106
LVM3X2U	105
LVM3X2UP	105
LVM3X3U	105
LVS1U	69
LVS1UP	69
LVXU	69
LVXUP	69

# INDEX

## 2014 CHIEF CATALOG

### M

MAC251	116
MAC252	116
MAC400	116
MAC720	116
MAC722	116
MAC790	116
MCB1U	90
MCB1X2U	90
MCM1U	90
MCM1X2U	90
MF1	115
MF2	115
MFAU	110
MFC	114
MPAU	110
MSAU	49
MSMU	49
MSMVPU	71
MSMVU	71
MSS	119
MSTU	52
MTAU	60
MTMPU	60
MTMU	60
MTS	118
MTTU	63
MWC	66

### N

NAB	174
NAC25H	177
NACF-	174
NACS	174
NADBW	180
NAF15BA	179
NAFB2BW	179
NAF EXHAUST FAN PANEL	179
NAFT85	179
NAG BRUSH GROMMET	178
NAGS1	156
NAID	180
NALRBW	178
NAM1A	180
NAM1F	180
NAM1T	180
NAPDH11	179
NAPDH11L	179
NAPDV	179
NASIS23	156
NASIS28	156
NATPBS	177
NATPBW	177
NAV8B	179
NAWS1	167
NAXQ20	178
NAXS	178
NAXS-BM	178
NAXS-IP	178
NAXS-RT	178
NAXU15	179

NE1D	160
NE1F	159
NG1F	157, 158
NG1S	158
NS1D	156
NS1F	155, 156
NS1S	156
NW1D	167

### O

OFBLU	139, 142
OFBU	139, 142
OFB-XXX	139, 142

### P

PAC103	57
PAC115	56, 67
PAC116	56, 67
PAC117	56, 67
PAC124	79
PAC125	56, 67
PAC126	56, 67
PAC136B	101, 117, 120
PAC136S	101, 117, 120
PAC138	101, 117, 120
PAC150	120
PAC251	79, 100, 116
PAC252	79, 100, 116
PAC253	79, 100
PAC260	57
PAC261	57
PAC390	56, 67
PAC392B	56, 67
PAC400	79, 100, 116
PAC502B	79
PAC511	51, 53, 56, 62, 64, 67, 76, 79
PAC516	51, 53, 56, 62, 64, 67, 76, 79
PAC521P	51, 53, 56, 62, 64, 67, 76, 79
PAC522	51, 53, 56, 62, 64, 67, 76, 79
PAC525FC	51, 53, 56, 62, 64, 67, 76, 79
PAC526FC	51, 53, 56, 62, 64, 67, 76, 79
PAC700	117
PAC710	116
PAC715	79, 100, 116
PAC716	79, 100, 116
PAC717	116
PAC720	116
PAC722	116
PAC730A	117
PAC735A	117
PAC770	117
PAC775	117
PAC780	117
PAC782	117
PAC784	117
PAC790	116
PACCC1	79, 100, 116
PACCC2	79, 100, 116
PACCCS1	79, 100
PACHFK2	79
PACLK1	56, 67
PACLR1	79, 100, 116, 120
PACLR2	79, 100, 116, 120

PACPC1	56, 67, 79, 100
PACTP1	117
PB PROJECT BOX	180
PDR	78
PF1	113
PF2	113
PFC	113
PFM	114
PFQ	114
PG1A	30
PG2A	30
PG3A	30
PL1	30
PL2	30
PL4	30
PMSC	30
PNR	78
POMT	181
PSC	176
PSMH	54
PSMH2840	54
PSMH2841	54
PSS	118
PTSW	177
PVP	176
PWC	65
PWR	166
PWRD	167
PX2W	29, 56, 67, 79
PXRU	77

### Q

QMPIC	117
-------	-----

### R

RC10	34, 101, 117
RCM	167
RFM	166
RKRLXXSPACE RACK RAIL OPTIONS	182
RKV RACK VAULT	180
RLC1	97
RLF2	54
RLT2	65
RMAUS	23
RMC1	97
RMF2	55
RMT2	66
ROTR	163
ROTR-HD	163
ROTRS	164
ROTR-XL	163
RPA	24
RPAA1	24
RPAU	25
RPMA	22
RPMA1	22
RPMAU	22
RSA	25
RS AU	25
RSG ROUND SPEAKER GRILL	181
RSMA	23

## INDEX

## 2014 CHIEF CATALOG

RSMAU	23
RWM	166
RXF2	54
RXT2	65

## S

S-10	170
SA1	30
SCDR	170
SEC	176
SEC2	30
SFG	176
SFT	176
SL151	33
SL220	33
SL236	33
SLS-1	175
SLS-1.5	175
SMA602	34
SMA620	34
SMA651	34
SPECIALTY PANEL	180
SSC	30
STLU	118
STOP	181
STS1	119
STSW-25	177
SWR	166

## T

TA100	76
TA200	76
TA250	76
TA300	76
TA350	76
TA410	76
TA500	76
TA501	76
TA502	76
TB	178
TMA100	31
TPA105	100
TPK1	100
TPK2	100
TPK3	100
TPK4	100
TPK5	100
TPM	98
TPP	98
TPS	97
TR-2	175
TR-3	175
TR-4	175
TS110SU	75
TS118SU	75
TS218SU	75
TS318SU	74
TS318TU	74
TS325TU	74
TS525TU	74

## U

UNS	174
UNS-1	174
UNS-1-MP10	174
UPB1	34
UTS	174
UTS-1	174
UTS-1-MP10	174
UTS-2	174
UTS-2-MP5	174
UTS-4	174
UTVS-3-14	174
UTVS-3-18	174

## V

VCM	26
VCS-2	174

## W

W1	165
W2	165
WBAE	46
WBAP	46
WBAU	46
WBM2	44
WBM2E	44
WBM3E	44
WDS3-14	174
WDS3-18	174
WM2I	38
WM110AUS	37
WM120AUS	37
WM130AUS	37
WM210AUS	36
WM210AUSI	42
WM220AUS	36
WM220AUSI	42
WM230AUS	36
WM230AUSI	42
WM240AUS	36
WM240AUSI	42
WMA1S	38
WMA2S	38
WMAC16	38
WMAH3S	38
WMAL24	38
WMAL72	38
WMIS	43
WMIUSBB	43
WMS	167
WP21US	39
WP22US	39
WP23US	39

## X

XCB1U	87
XCB7000	86
XCM1U	87
XCM7000	86
XPAU	109
XSMU	48
XTMU	59
XVAU	109

## Y

YAMF1	161
YF1F	161

# TERMS & CONDITIONS

**PRICES:** Prices are subject to change without notice. Orders are priced at the pricing in effect on the date your purchase order was received. To guarantee pricing for a specific period, customer must obtain a written quotation from Chief. Chief only sells directly to authorized Chief dealers and distributors. Possession of said price book does not constitute an offer to sell.

**QUANTITY DISCOUNTS:** With the exception of CMA and CMS accessories, products with the same 3-letter prefix may be combined to receive quantity-based discounts. For example: three RPA1200 can be mixed with three RPA800 for the 6-11 piece quantity price break. However, three RPA1200 cannot be mixed with three PSM2042. Contact Chief if you have any questions regarding price structure.

**TERMS AND CONDITIONS:** All accounts are due and payable in funds according to the terms of the invoice.

**ORDERING:** Because of the specific nature of our products and our commitment to entering and shipping orders accurately, we prefer that orders be placed in writing via a purchase order and sent to us via fax (877-894-6918) or via e-mail (orders@chiefmfg.com). In urgent situations, we will make every effort to take accurate orders verbally when requested by the customer. Chief cannot guarantee that verbal miscommunication errors will result in the purchaser's favor.

**ORDER CONFIRMATION:** Customers will receive an E-mail confirmation of their order within 1-3 hours of receipt of purchase order. If you do not receive a confirmation of your order, please contact us as it is possible we did not receive your original order. Please review the confirmation to ensure Chief has recorded the details of the transaction as you expected and notify Chief of any discrepancies immediately.

**CHANGES TO ORDERS:** Because expedited orders begin the production and shipping fulfillment process immediately upon receipt and entry of purchase order, it is frequently not possible to change orders. Other orders will be changed as possible. Contact Customer Service at 800.582.6480 (domestic) / 952.894.6280 (international) and they will work through an alternative solution with you. In all cases, the customer is responsible for incremental charges incurred because of the change.

**SPECIAL ORDERS:** Some of Chief's products can be customized to fit your specific applications. Contact Inside Sales for additional information and pricing. Orders for large quantities of products may also be considered a special order. Any special order or custom product not normally carried in inventory cannot be returned. All electrical products and products with quote pricing are treated as special order items.

**PRODUCT CHANGES/DISCONTINUED PRODUCTS:** Chief is constantly developing new products and making improvements to existing ones; therefore, we reserve the right to revise or change specifications, designs and model numbers and to discontinue models without notice.

**PACKAGING:** Where possible and practical, Chief will bulk-pack the items on your order. Please keep in mind that the dimensions and weight of some of our products may preclude bulk-packing. We are not responsible for air-freight or other charges due to multiple single package shipments.

**DELIVERY:** All promises of delivery are made in good faith and every reasonable effort is made to see that delivery schedules are met. However, if Chief is unable to meet a schedule due to factors beyond our control such as, but not limited to, failure of our suppliers to meet their promised dates or weather-related delivery delays, Chief will not be responsible for significant or specific damage. Significant or specific damages may be, but are not limited to, express shipping method charges or installation delay charges. Contact the Chief Inside Sales team for assistance with freight estimates specific to your needs. Delivered prices do not include any type of extraordinary charges such as lift gate requirements, inside delivery charges, residential charges or other non-standard charges.

**FREIGHT AND FREIGHT DAMAGE:** Because all Chief product ships FOB Savage, MN or point of shipment, all shipping costs and risks of freight damage are the responsibility of the purchaser. It is the customer's responsibility to immediately open and inspect all packages and, in the event there is any damage or shortages, file a claim with the freight company. Please contact Chief Customer Service at 800.582.6480 (domestic) / 952.894.6280 (international) to get contact information about the specific freight company used and to discuss receiving a replacement product. Keep the damaged product in its original packaging and carton. Unless concealed damage is reported to the Carrier and Chief immediately, there is no recourse. The customer will be charged for any replacement product as the eventual credit will come directly from the carrier via the claim filed.

**RETURNS AUTHORIZATION:** All merchandise returned to Chief must be returned with prior authorization and a Return Authorization number provided by Customer Service. Chief will provide Return Authorization only for those products purchased directly from Chief. Consumers or dealers purchasing through a third party must request returns through that third party and are subject to that entity's return policies and charges. Defective or product received incorrectly due to an error on Chief's part will be credited to your account in full. In situations where the dealer needs to return merchandise due to a change in its project/equipment or due to ordering incorrectly, a restock charge will apply as follows. Merchandise invoiced in the past 0-30 days - 10%; 31-60 days - 15%; 61-90 days - 25%. Reduced fees may be given for an accompanying reorder of equal or greater value. Returns are not allowed for merchandise over 90 days old; electrical lift products; special order products, or discontinued merchandise. Products returned that are damaged or missing parts will not be eligible for credit unless they can easily be made saleable. Additional charges for parts and labor may apply.

**LIMITED WARRANTY:** With the exception of electrical products, Chief warrants its products to be free of defects in material and workmanship for 10 years. All warranties are in effect beginning the date the product was invoiced by Chief. Electrical mechanisms (such as lift products) have a 1-year limited warranty. All warranties are in effect for the original purchaser only. Chief disclaims liability for any modifications, improper installation and/or installations over the specified weight capacity. Chief also disclaims liability for any modifications made to electrical mechanisms, improper installation, incorrect voltage connection and/or installations over the stated weight capacity. All Electrical Mechanisms are intended for indoor use only and failure to comply will void warranty. Chief's sole warranty obligation to the owner of its products is to repair or replace (at Chief's discretion) defective products at no charge to the original purchaser within the warranty period. The purchaser is responsible for returning the product to Chief via prepaid shipping. To the maximum extent permitted by applicable law, Chief disclaims any other warranties, express or implied, including warranties of fitness for a particular purpose and warranties of merchantability. Chief will not be liable for any damages whatsoever arising out of the use or inability to use Chief products, even if Chief has been advised of the possibility of such damages. Chief bears no responsibility for incidental or consequential damages. This includes, but is not limited to, any labor charges for the repair of Chief products performed by someone other than a Chief employee. Because some states and jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply. Chief will not be responsible for damage to Chief products caused by misuse, abuse, failure to properly package the product for return to Chief or for damage caused by carriers during shipment to or from Chief. Any repairs to Chief products required due to misuse, abuse or shipping damage or repairs of defective Chief product outside the warranty period will be performed at the current rates established by Chief for factory service.









**CHIEF** A BRAND OF MILESTONE AV TECHNOLOGIES ■ [www.chiefmfg.com](http://www.chiefmfg.com)

USA P 800.582.6480 / +1.952.225.6000 ■ F 877.894.6918 / +1.952.894.6918 ■ [chief@chiefmfg.com](mailto:chief@chiefmfg.com)

Canada P 877.345.4329 ■ F 888.377.5314 ■ [canadainfo@milestone.com](mailto:canadainfo@milestone.com)

EMEA P +31 495 580 840 ■ F +31 495 580 845 ■ [emea.sales@milestone.com](mailto:emea.sales@milestone.com)

Asia Pacific P +852 2145 4099 ■ F +852 2145 4477 ■ [asia.chief@milestone.com](mailto:asia.chief@milestone.com)

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2014 Milestone AV Technologies. 140007 1/14 Chief is a registered trademark of Milestone AV Technologies.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

All patents are protected under existing designations. Other patents pending.